

PRODUCT INDEX 2026

INDOOR PRODUCTS

Downlights and recessed luminaires	4
Fixtures for mains voltage track	46
Fixtures for low voltage track	80
Pendants	126
Linear systems	172
Wall luminaires	196
Ceiling luminaires	224
Table and floor lamps	264
Emergency lighting	280
Lighting effect luminaires	290

OUTDOOR PRODUCTS

Pole and wall mounted systems	306
Pole and wall mounted multiple floodlights	342
Poles	358
Linear systems	368
Floodlights	376
Recessed in-ground luminaires	398
Recessed wall luminaires	410
Recessed ceiling luminaires	418
Bollards	428
Wall mounted luminaires	444
Ceiling mounted luminaires	462
Lighting effect luminaires	476
Intelligent Light Solutions	490




DOWNLIGHTS AND RECESSED LUMINAIRES



6 | LASER BLADE XS



10 | LASER BLADE



12 | LASER BLADE L




14 | CRYSTAL



16 | BLADE R




18 | EASY SPACE




20 | EASY




22 | REFLEX




24 | LASER EVO




28 | LASER



30 | TACK




31 | PIXEL PLUS



32 | TECNICA EVO



34 | LIGHT SHED 60



36 | IN60 EVO



38 | IN30



40 | IN30 EVO



43 | ISOLA



44 | IPLAN NEXT



45 | IPLAN ACCESS

LASER BLADE XS

design iGuzzini



HIGH CONTRAST

1 | 2 | 3 | 2x2 | 3x3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White

up to 3140lm

up to 125 lm/W

M | F | WF

Frame | Minimal

Fixed



WALL WASHER LGC

3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White

up to 930 lm

up to 45.1 lm/W

WW-LGC

Frame | Minimal

Fixed



WALL WASHER

3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White

Wall Washer

up to 1150lm

up to 56lm/W

Frame | Minimal

Fixed



GENERAL LIGHTING PRO

3x3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K

GL Pro

up to 2835lm

up to 109lm/W

Frame

Fixed



HIGH CONTRAST - ADJUSTABLE

1x5 | 1x10 | 1x15 | 2x5 | 2x10 |
2x15 cells

2700K | 3000K | 3500K | 4000K

up to 5729lm

up to 125lm/W

M|F

Frame

Adjustable - Tilting 30°

Other versions available

Fixtures for low voltage track p. 102



Laser Blade XS
High Contrast for
Filorail



Laser Blade XS
Wall Washer LGC
for Filorail



Laser Blade XS
General Lighting
Pro for Filorail



Laser Blade XS
High Contrast
pendant for
Filorail



Laser Blade XS
High Contrast -
Low Voltage track



Laser Blade XS
Wall Washer
- Low Voltage
Track



Laser Blade XS
General Lighting
Pro - Low Voltage
track



Laser Blade XS
High Contrast
- Low Voltage
track pendant



Laser Blade XS
High Contrast for
Superrail



Laser Blade XS
Wall Washer
LGC for Superrail



Laser Blade XS
General Lighting
Pro for Superrail

Ceiling luminaires p. 226



Laser Blade XS
High Contrast -
ceiling



Laser Blade XS
Wall Washer -
ceiling



Laser Blade XS
General Lighting
Pro - ceiling

Pendants p. 158



Laser Blade XS
High Contrast
pendant - ceiling

2700K | 3000K | 3500K | 4000K |
Tunable White (2700K - 5700K)

CRI 80 | CRI90

IP 20 | IP43

8 sizes

Fixed | Adjustable

Frame | Minimal

Class II, III (Power supply to be order-
ed separately)

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI







Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes

-  01 White
-  C1 Traffic white RAL9016
-  B1 Signal white RAL9003
-  15 Grey
-  04 Black
-  V0 Matte black

Optical finishes

-  01 White
-  04 Black
-  14 Gold
-  E6 Burnished chrome



Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019




Visit our website
for more information

LASER BLADE XS

design iGuzzini



Minus 05 - Poperinge, Belgium — Product: Laser blade XS - High Contrast | Minimal | 10 cells | Black
Ph: FalkeKnoc

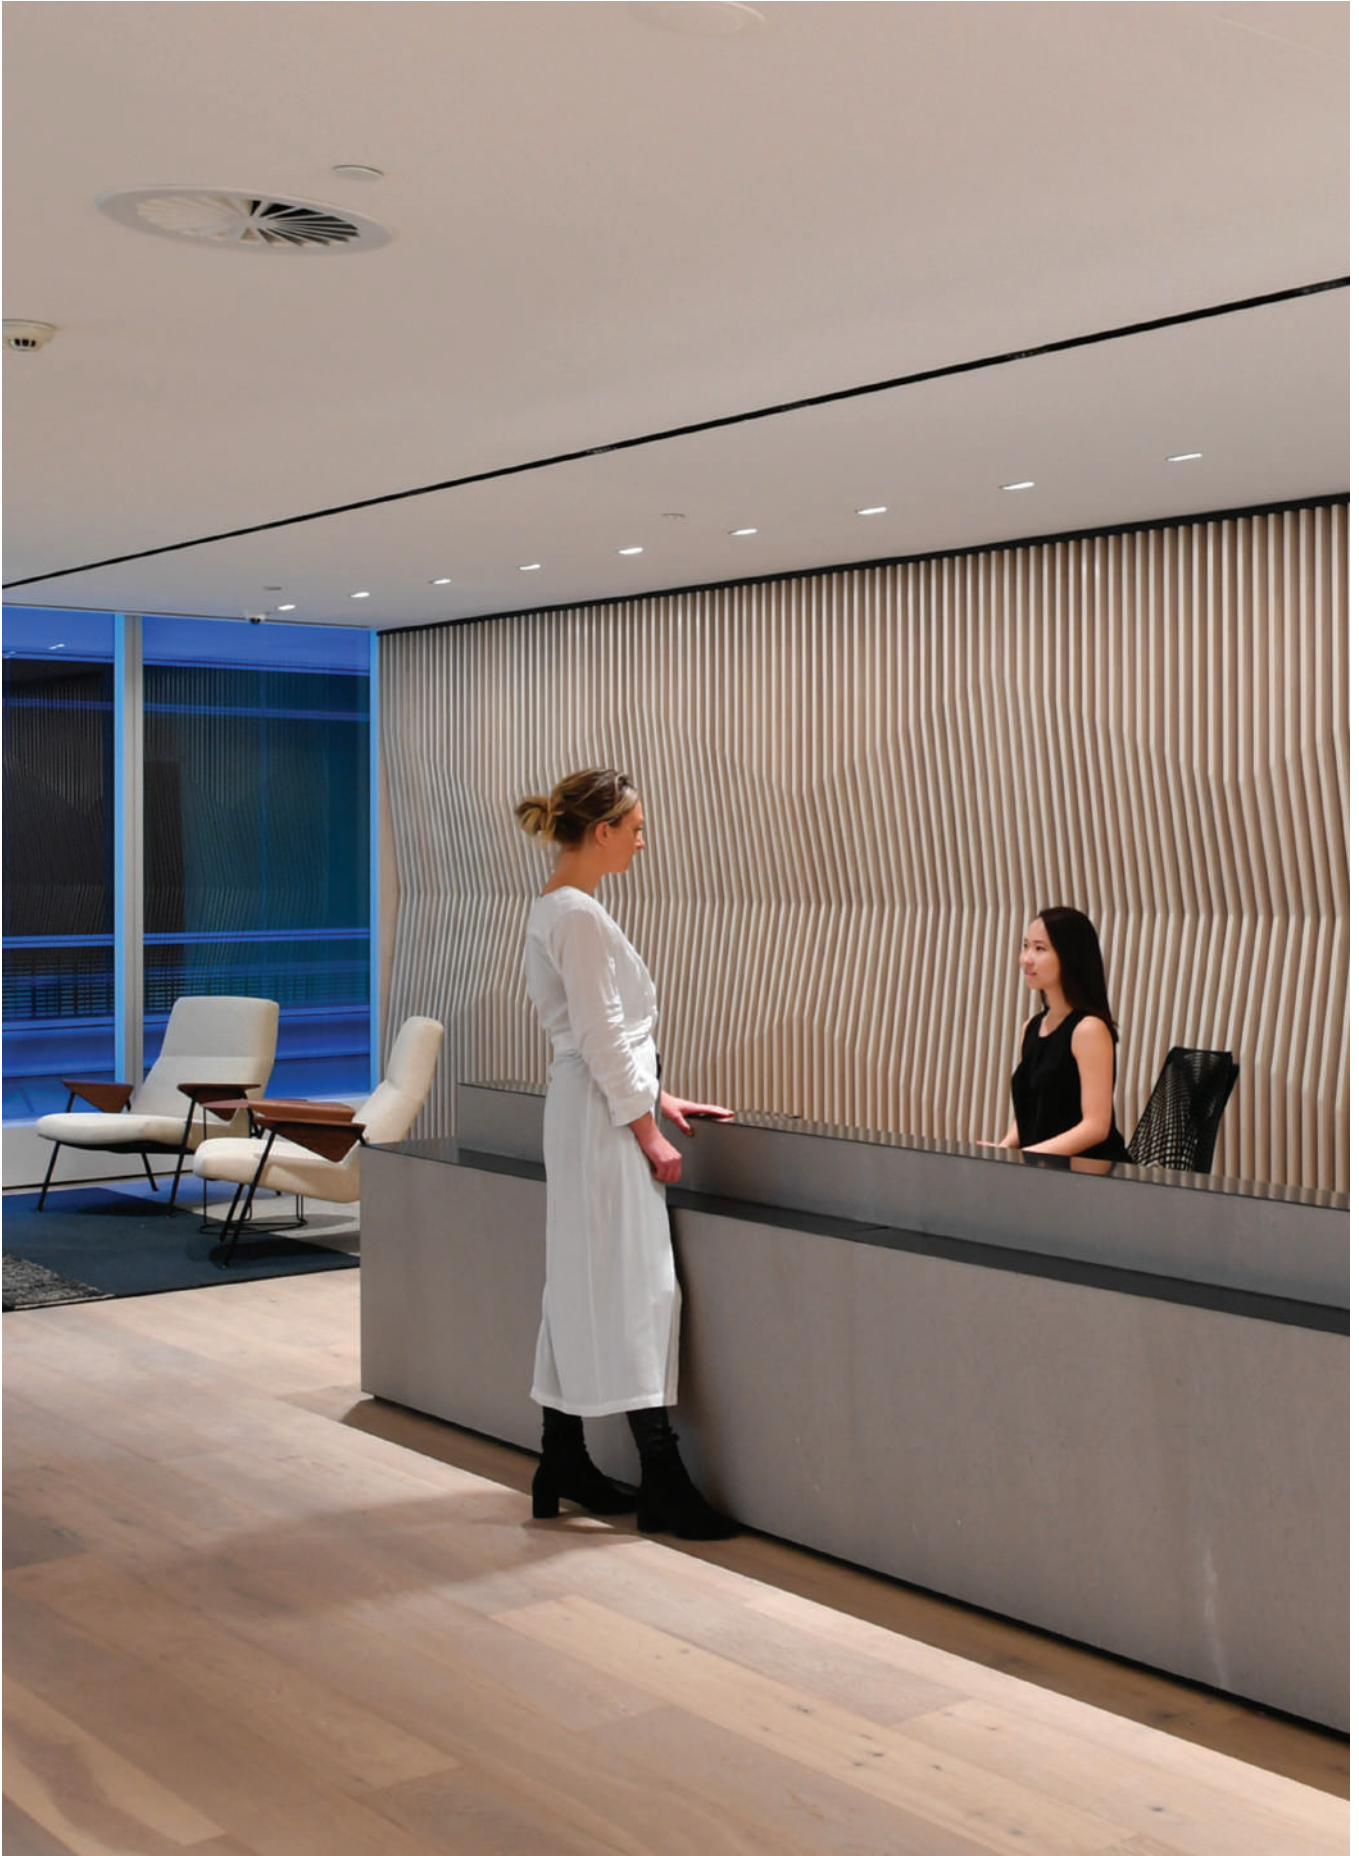

Link Group - Sidney — Product: Laser blade XS - Wall Washer | Frame | White/Black
Ph: Marcus Clinton

LASER BLADE

design iGuzzini



Villa Brattlie - NesØya, Norway — Product: Laser blade - High Contrast | Frame | 5 cells | White/Black
Ph: Tomasz Majewski



HIGH CONTRAST

1 | 2 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White | Tunable Warm

up to 3723lm

up to 120lm/W

S | F | WF

Frame | Minimal

Fixed



OVAL

5 | 10 cells

2700K | 3000K | 3500K | 4000K
up to 2190lm

up to 103lm/W

MOL | WOL | WOT | ET

Frame

Fixed



SPACE

5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White | Tunable Warm

up to 3723lm

up to 120lm/W

WF

Frame | Minimal

Fixed



WALL WASHER

5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K |
Tunable White

up to 1540lm

up to 50lm/W

WW

Frame | Minimal

Fixed



WALL WASHER LGC

5 | 10 | 15 cells
 2700K | 3000K | 3500K | 4000K |
 Tunable White
 up to 1170lm
 up to 38 lm/W
 WW
 Frame | Minimal
 Fixed



GENERAL LIGHTING PRO

5 | 10 | 15 cells
 2700K | 3000K | 3500K | 4000K
 up to 3336lm
 up to 108 lm/W
 GL-PRO
 Frame
 Fixed



HIGH CONTRAST - ADJUSTABLE

10 | 15 | 2x10 | 2x15 cells
 2700K | 3000K | 3500K | 4000K
 up to 7276lm
 up to 120lm/W
 S | F | WF
 Frame
 Adjustable - 30° titling



LASER BLADE IN30 HIGH CONTRAST RECESSED

2x5 | 2x10 module
 3000K | 4000K
 up to 4131lm
 up to 73lm/W
 WF
 Frame
 Fixed

2700K | 3000K | 3500K | 4000K

Tunable White (2700K - 6500K) |
 Tunable Warm (2000K - 3500K)

CRI80 | CRI90 | CRI95

IP20 | IP43

5 sizes

Fixed | Adjustable

Frame | Minimal

Class II, III (Power supply to be ordered separately)

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Smart services:


Space management |

Push notification

Body finishes

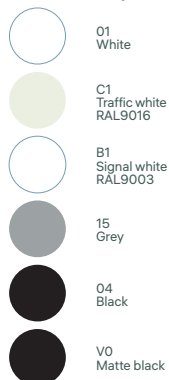

Optical finishes

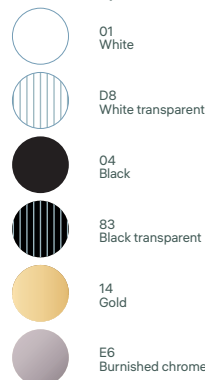

Other awards:
 Lux Awards 2012
 Futurshop 2012
 Win World Interiors Awards 2013




Visit our website
 for more information

LASER BLADE L

design iGuzzini



Britannia Hotel - Trondheim, Norway — Product: Laser blade L - High Contrast | Frame | 2 cells | White
Ph: Tomasz Majewski



HIGH CONTRAST

1 | 2 | 3 cells
 2700K | 3000K | 4000K
 up to 3195lm
 up to 112lm/W
 M | F | WF
 Frame | Minimal
 Fixed



ADJUSTABLE

1 cell
 2700K | 3000K | 4000K
 up to 792lm
 up to 88lm/W
 S | M | F | WF
 Frame | Minimal
 Adjustable - Rotation 358° | Tilting 30°
 Rotation 358°




WALL WASHER


1 | 2 | 3 cells
 2700K | 3000K | 4000K
 up to 2066lm
 up to 72lm/W
 WW
 Frame | Minimal
 Fixed

2700K | 3000K | 4000K
 CRI80 | CRI90
 IP20 | IP44
 3 sizes
 Fixed | Adjustable
 Frame | Minimal
 Class II
 DALI | DALI-2

Body finishes



Optical finishes



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification



Visit our website
 for more information



GENERAL LIGHT

3 | 6 | 9 cells
 3000K | 3500K | 4000K |
 Tunable White
 up to 4127lm
 up to 155lm/W
 F | WF | GL
 Frame
 Fixed



UGR<19

3 | 6 | 9 cells
 3000K | 3500K | 4000K |
 Tunable White
 up to 2390lm
 up to 155lm/W
 UGR<19
 Frame
 Fixed



OVAL

3 cells
 3000K | 3500K | 4000K
 up to 1186lm
 up to 140lm/W (Class III)
 WOL | WOT
 Frame
 Fixed



WALL WAHSER

3 | 6 | 9 cells
 3000K | 3500K | 4000K |
 Tunable White
 up to 3778lm
 up to 130lm/W
 WW
 Frame
 Fixed



Fiandre's historic headquarters - Castellarano, Italy — Product: Crystal - Wide Oval Longitudinal and General Lighting | 3 cells | Black transparent
 Ph: Fabio Mantovani, courtesy of Fiandre

3000K | 3500K | 4000K |
 Tunable White (2700K - 6500K)
 CRI80 | CRI90
 IP20 | IP43
 3 sizes
 Fixed
 Frame
 Class II, III
 DALI-2
 Power supply accessory to be ordered
 separately (for the 3-cell version)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification



Finishes

D8
 White transparent

83
 Black transparent



reddot winner 2023
 best of the best

Other awards:
 IES Progress Report 2023
 Good Design 2023



Visit our website
 for more information

BLADE R

design iGuzzini



Movistar team offices - Egüés, Spain — Product: Blade R - Blade R + Variable light | Ø170 mm | White/Black
Ph: Pablo García Esparza



Ø80 mm

2700K | 3000K | 3500K | 4000K


up to 1218lm

up to 84lm/W

M | F | WF

Frame | Minimal

Fixed

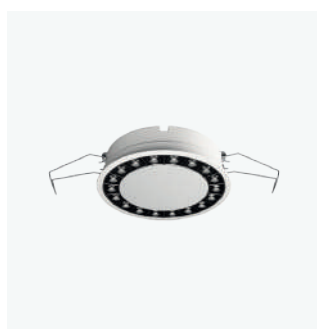

Ø125 mm

2700K | 3000K | 3500K | 4000K

up to 2465lm

up to 91lm/W

M | F | WF

Frame | Minimal

Fixed



Ø170 mm

2700K | 3000K | 3500K | 4000K

up to 3654lm

up to 93lm/W

M | F | WF

Frame | Minimal

Fixed



Ø170 mm DOUBLE

2700K | 3000K | 4000K

up to 5270lm

up to 93lm/W

M | F

Frame

Fixed



ADJUSTABLE LIGHT

Laser Ø59 mm for Blade R Ø125 mm |
Laser Ø75 mm for Blade R Ø170 mm
2700K | 3000K
up to 1020lm
up to 85lm/W
M | F | WF
Frame | Minimal
Adjustable



PROFILED LIGHT

Palco framer Ø19 mm |
Palco framer Ø37 mm
2700K | 3000K
up to 160lm
up to 25lm/W
Frame | Minimal
Framer




VARIABLE LIGHT

Easy Ø96 mm | Easy WW Ø96 mm
2700K | 3000K | 4000K |
Tunable White
up to 1292lm
up to 107lm/W
WF | WW | GL
Frame | Minimal
Fixed



EMERGENCY LIGHT

for Blade R Ø170 mm
5000K
up to 220lm
Anti-Panic | Escape-Route
DALI monitoring

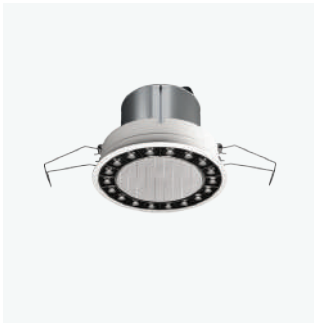

LOUDSPEAKER

for Blade R Ø170 mm
EN54 passive speaker
12 W 8 ohm / 12 W 100 V / 6 W 70 V



SMOKE DETECTOR

for Blade R Ø170 mm
Adapter for smoke detectors
For compatible smoke detectors
visit iGuzzini website



CAMERA

for Blade R Ø170 mm
Axis FA4115 Camera adapter



DALI-2

for Blade R Ø170 mm
DALI-2 lux and motion sensor

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP54

3 sizes

Fixed

Frame | Minimal

Class II

DALI-2 | DALI-2 sensor |
DALI monitoring Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



Other awards:
Progress Report Selection 2020
Red Dot Design Award (Innovative Products) 2020
Lux Awards 2020
Lighting Design Awards 2020
German Design Award 2022



Visit our website
for more information

EASY SPACE

design iGuzzini



Story House Production offices - Berlin, Germany — Product: Easy space - UGR<19 | Ø212 mm | Black transparent
Ph: Luca Girardini



GENERAL LIGHT

Ø96 | Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 4929lm
up to 139lm/W
Frame
Fixed



UGR<19

Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 4515lm
up to 127lm/W
Frame
Fixed



UGR<19 - MICROFILM

Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 2581lm
up to 133lm/W
Frame
Fixed



WALL WASHER

Ø96 | Ø153 | Ø212 mm
3000K | 3500K | 4000K
up to 4452lm
up to 123lm/W
Frame
Fixed



SQUARE GENERAL LIGHTING

96×96 | 153×153 | 212×212 mm

3000K | 3500K | 4000K

up to 4455lm

up to 137lm/W

Frame

Fixed



SQUARE UGR<19

153×153 | 212×212 mm

3000K | 3500K | 4000K

up to 2254lm

up to 135lm/W

Frame

Fixed

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP54

3 sizes

Fixed

Frame

Class II

DALI-2

ON/OFF Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



D8
White transparent



83
Black transparent



Visit our website
for more information



Monterosa 91 - Milan, Italy — Product: Easy - General lighting | Ø96 mm | White
Ph: Michele Nastasi

**GENERAL LIGHTING**

Ø96 | Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4664lm
 up to 127lm/W
 Frame
 Fixed

**UGR<19**

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4410lm
 up to 136lm/W
 Frame
 Fixed

**UGR<19 - MICROFILM**

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 2447lm
 up to 132lm/W
 Frame
 Fixed

**WALL WASHER**

Ø96 | Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4399lm
 up to 120lm/W
 Frame
 Fixed

Other versions available


Ceiling luminaires p. 232

Pendants p. 148

Emergency lighting p. 288



Easy ceiling



Easy pendant



Easy emergency lighting

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP40 | IP54

3 sizes

Fixed

Frame

Class II

DALI-2

ON/OFF Emergency

Finishes01
White39
White/Aluminium**Intelligent Light Solutions****Smart controls:**

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Visit our website
for more information



Club Virgin Active Milano Bocconi - Milan, Italy — Product: Reflex - White reflector | Frame | Ø125 mm | White
Ph: Paolo Carlini



C.O.B. ROUND

Ø75 | Ø96 | Ø125 | Ø153 |
 Ø212 | Ø242 mm
 2700K | 3000K | 4000K |
 Tunable White
 up to 6424lm
 up to 129lm/W
 M | F | WF | VWF
 Frame
 Fixed



C.O.B. SUPER COMFORT ROUND

Ø125 | Ø212 mm
 3000K | 4000K
 up to 5120lm
 up to 116lm/W
 M | F | WF - UGR<10
 Frame
 Fixed



C.O.B. WALL WASHER

Ø96 | Ø125 | Ø153 | Ø212 mm
 2700K | 3000K | 4000K
 up to 3401lm
 up to 95lm/W
 WW
 Frame | Minimal
 Fixed




C.O.B. ADJUSTABLE ROUND


Ø75 | Ø96 | Ø125 | Ø153 | Ø212 mm
 2700K | 3000K | 4000K
 up to 3680lm
 up to 105lm/W
 M | F
 Frame
 Adjustable

2700K | 3000K | 4000K |
 Tunable White
 CRI80 | CRI90
 IP20 | IP54
 6 sizes
 Fixed | Adjustable
 Frame | Minimal
 Class II
 DALI | DALI-2

Body finishes



Optical finishes



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification



Visit our website
 for more information



**FIXED - CONE**

Ø17 | Ø25 | Ø40 | Ø59 | Ø75 | Ø96 |
Ø125 | Ø153 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 2247lm
up to 117lm/W
SS | S | M | F | WF

**FIXED - SQUIRCLÉ**

Ø40 | Ø59 | Ø75 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1339lm
up to 112lm/W
SS | S | M | F | WF

**FIXED - DOME**

Ø59 | Ø75 | Ø96 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 2247lm
up to 117lm/W
SS | S | M | F | WF

**FIXED - DOME SPACE**

Ø59 | Ø75 | Ø96 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 2247lm
up to 117lm/W
SS | S | M | F | WF

**FIXED - SOFT**

Ø59 | Ø75 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1339lm
up to 112lm/W
SS | S | M | F | WF

**FIXED - SOFT SPACE**

Ø59 | Ø75 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1339lm
up to 112lm/W
SS | S | M | F | WF

**EASY ADJUSTABLE**

Ø40 | Ø59 | Ø75 | Ø96 |
Ø125 | Ø153 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1750lm
up to 100lm/W
SS | S | M | F | WF

**DOUBLE ADJUSTABLE**


Ø40 | Ø59 | Ø75 | Ø96 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1750lm
up to 100lm/W
SS | S | M | F | WF

**TILTED**

Ø59 | Ø75 | Ø96 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1750lm
up to 100lm/W
M | F | WF

**WALL WASHER**

Ø40 | Ø59 | Ø75 | Ø96 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 1200lm
up to 81lm/W
WW

**SHALLOW**

Ø75 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90
up to 1250lm
up to 113lm/W
SS | S | M | F | WF

**PROFESSIONAL P&G**

Ø125 | Ø153 mm
2400K | 2700K | 3000K | 3500K |
4000K | Tunable warm
CRI90 | CRI97 | CRI90 HE
up to 2600lm
up to 120lm/W
SS | S | M | F | WF



Other versions available

Pendants



Laser Evo pendant

Fixtures for low voltage track



Laser Evo pendant for Filorail




Laser Evo pendant for Low Voltage Track / Superrail



Ceiling luminaires



Laser Evo ceiling

- 2400K | 2700K | 3000K | 3500K | 4000K | Tunable warm (1800K-4000K)
- CRI90 | CRI95 | CRI97 | CRI90 HE
- IP20 | IP44 | IP65
- up to 8 sizes
- Fixed | Adjustable (Rotation 358° - Tilting 35°)
- Frame | Minimal (by accessories)
- Class II | III (Power supply to be ordered separately)
- Lens | Reflector
- Casambi
- DALI-2
- ON/OFF
- 0/1-10V
- Phase-cut
- HF Organic Response sensor
- HF Casambi sensor

- Optical finishes**
-  01 White
 -  10 Metal chrome
 -  14 Gold
 -  E8 Gold-satin
 -  69 Bronze
 -  N8 Titanium
 -  04 Black
 -  V0 Matte black
 -  V6 Matte copper

- Optical finishes for Soft Space and Dome Space:**
-  83 Black transparent
 -  D8 White transparent

Intelligent Light Solutions

Smart controls:

- Organic Response (control + sensor)
- Quick BLE (Casambi)
- Quick DALI
- Master Pro Evo

Smart services:

- Space management | Push notification

Visit our website for more information

Laser evo: 6 sizes (Ø17/25/40/59/75/96mm) frame recessed available from March 2026, frameless recessed available from December 2026

Laser evo: 2 sizes (Ø125/153mm) recessed available from November 2026

Laser evo: 2 sizes (Ø59/75mm) pendant, ceiling, LV track and multiple available from November 2026





Songyuan House - Ancient City of Zhujiajiao, China — Product: Laser - Adjustable round | Minimal | Ø75 mm | Black
Ph: Wang Zilu



FIXED ROUND

Ø17 | Ø25 | Ø38 | Ø59 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI80 | CRI90
up to 2138lm
up to 125lm/W
S | M | F | WF
Frame | Minimal



FIXED SQUARE

Ø59 | Ø75 mm
2700K | 3000K
CRI90
up to 1069lm
up to 106lm/W
M | F | WF
Frame | Minimal



ADJUSTABLE ROUND

Ø38 | Ø59 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 2147lm
up to 126lm/W
S | M | F | WF
Frame | Minimal



WALL WASHER ROUND

Ø38 | Ø75 | Ø96 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 1118lm
up to 79lm/W
WW
Frame | Minimal



WALL WASHER SQUARE

Ø75 mm

2700K | 3000K

CRI90

up to 739lm

up to 73lm/W

WW

Frame | Minimal

Other versions available

Ceiling luminaires p. 230



Laser ceiling

Pendants p. 156



Laser pendant

Fixtured for low voltage track p. 100



Laser pendant
for Filorail



Laser pendant
for low voltage
track

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP44 | IP65

6 sizes

Fixed | Adjustable

Frame | Minimal

Class III (Power supply to be
ordered separately)

UGR<10

ON/OFF

0/1-10V

DALI-2

Phase-cut

Emergency kit

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01
White



04
Black

Optical finishes



01
White



14
Gold



E8
Gold-satin



E7
Chrome



E6
Burnished chrome



04
Black



Other awards:
FX International Interior Design Award 2016



Visit our website
for more information



Ø60 mm RECESSED

3000K | 3500K | 4000K

up to 1766lm

up to 154lm/W

S | M | F | WF



Ø80 mm RECESSED

3000K | 3500K | 4000K

up to 3088lm

up to 172lm/W

SS | S | M | F | WF



Ø90 mm RECESSED

3000K | 3500K | 4000K

up to 4306lm

up to 176lm/W

SS | S | M | F | WF

Other versions available


Fixtures for mains voltage track p. 66

Ceiling luminaires p. 246

Pendants p. 155



Tack



Tack pendant



Tack ceiling



Tack pendant

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Rotation 358° | Tilting 80°

Lens | Reflector

Class II

DALI-2

Finishes



01
White



V0
Matte black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification




Visit our website
for more information

Tack: recessed available
from March 2026



LAC Lugano Art and Culture - Lugano, Switzerland — Product: Pixel Plus - Ø125 mm | Black
Ph: Paolo Carlini



DOWNLIGHT

Ø125 | Ø196 mm
3000K | 4000K
up to 4399lm
up to 123lm/W
M | F | WF
Frame
Adjustable

3000K | 4000K

CRI90

IP23

2 sizes

Adjustable

Frame

Rotation 365° | Tilting +40° -65°

Class II

DALI | DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01 White




04 Black



Visit our website
for more information



Caffè Bistrot Euclide - Rome, Italy — Product: Tecnica Evo - Ø92 mm | Recessed | Black
Ph: Francesca Di Stefano Photography

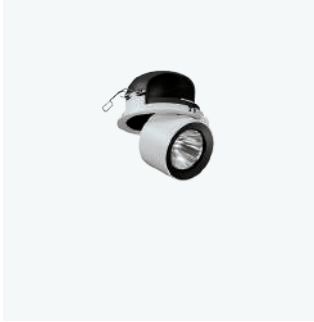


Ø92 mm RECESSED

3000K | 4000K

up to 3393lm

up to 126lm/W

M | F | WF

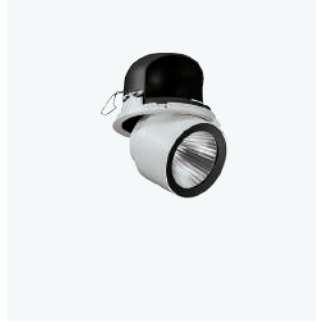


Ø117 mm RECESSED

3000K | 4000K

up to 5263lm

up to 144lm/W

M | F | WF | VWF

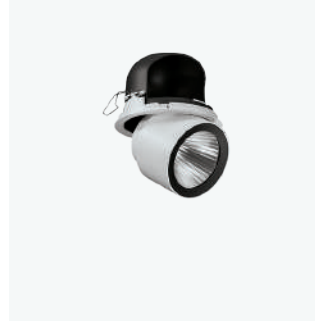

Ø117 mm FOOD RECESSED

2700K | 3000K | 6500K

up to 3867lm

up to 96lm/W

F

Other versions available

Fixtures for mains voltage track p. 68

Pendants p. 154



Tecnica Evo



Tecnica Evo pendant



Tecnica Evo pendant

2700K | 3000K | 4000K | 6500K

CRI80 | CRI90

IP20

2 sizes

Adjustable

Rotation 359° | Tilting +60°-20°

Frame

Class II

DALI-2

ON/OFF

Finishes



01 White



04 Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website for more information

LIGHT SHED 60

design iGuzzini




University of Macerata. Loggia del Grano - Macerata, Italy — Product: Light Shed 60 - Recessed | UGR<19 | 600×600 mm | Grey
Ph: Studio Buschi






60 RECESSED

600x600 mm
 3000K | 4000K | Tunable White
 up to 3976lm
 up to 139lm/W
 UGR<19



60 DB RECESSED

600x600 mm
 3000K | 4000K | Tunable White
 up to 3274lm
 up to 115lm/W
 UGR<19



LINEN RECESSED

600x600 mm
 3000K | 4000K | Tunable White
 up to 3496lm
 up to 123lm/W
 UGR<19


Other versions available

Pendants p. 132



Light Shed 60 pendant

Smart accessories for Light Shed



Cover with bracket for external / semi-recessed camera









Cover with bracket for recessed camera



Cover with multi-sensor lux and movement

3000K | 4000K |
 Tunable White (2700K - 6500K)
 CRI80 | CRI90
 IP20 | IP43
 1 size
 Fixed
 MPO (Micro Prismatic Optic)
 Class II
 Casambi
 DALI-2
 ON/OFF Emergency

Finishes

-  01 White
-  15 Grey
-  07 Green
-  E8 Gold-satin
-  S0 Ecu
-  16 Blue



Other awards:
 Gold Certificate a "Les Grands Prix du Design" 2022
 IES Progress Report 2023

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification



Visit our website
 for more information




MOL Campus - Budapest, Hungary — Product: iN60 Evo
Ph: HGEsch Photography



SYSTEM SPACE

White transparent | Black transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K |
Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission




SYSTEM MMO

Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K |
Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19




SYSTEM MPO

Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module



SYSTEM OPAL

600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1642lm/m

up to 104lm/W

WW

Other versions available

Fixtures for mains voltage track p. 76 / Linear systems p. 180



iN60 Evo System
Space



iN60 Evo System
MMO



iN60 Evo System
MPO



iN60 Evo System
Opal



iN60 Evo
Wall Washer

Pendants p. 137



iN60 Evo System
Space



iN60 Evo System
MMO



iN60 Evo System
MPO



iN60 Evo System
Opal



iN60 Evo System
Wall Washer



iN60 Evo
Stand-alone
MMO



iN60 Evo
Stand-alone
MPO



iN60 Evo
Stand-alone
Opal



iN60 Evo
Stand-alone
Space

Smart accessories for iN60 Evo




Organic Response
lux and motion
sensor



Casambi lux and
motion sensor



DALI-2 lux and
motion sensor



Casambi-DALI
control interface



Li-Fi transceiver
module

3000K | 3500K | 4000K |
Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19 | WW

Up & Down | Down emission |
Up & Down independent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor |
Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White

04
Black

12
Aluminium



Visit our website
for more information



Klößner & CO office - Duisburg, Germany — Product: iN30 - Low Contrast and High Contrast | White
Ph: Jens Kirchner



RECESSED LOW CONTRAST

1200 | 2400 | 600x600 mm
 3000K | 4000K
 up to 4081lm
 up to 107lm/W
 GL
 Frame
 CRI80



RECESSED HIGH CONTRAST

1200 mm (2x5 cells) | 1400 mm (2x10 cells)
 3000K | 4000K
 up to 4131lm
 up to 90lm/W
 WF
 Frame
 CRI90 | CRI95

Other versions available

Ceiling luminaires p. 252

Pendants p. 140



iN30 ceiling Low Contrast



iN30 ceiling High Contrast



iN30 pendant Low Contrast



iN30 pendant High Contrast

Linear systems p. 174



iN30 ceiling Low Contrast



iN30 ceiling High Contrast



iN30 pendant Low Contrast




iN30 pendant High Contrast

3000K | 4000K
 CRI80 | CRI90 | CRI95
 IP20

2 Other versions available

Fixed
 Frame
 Class I
 DALI-2

Finishes



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification



Visit our website for more information



Wargaming Office - Nicosia, Cyprus — Product: iN30 Low contrast and High contrast | White
Ph: Maria Efthymiou




SYSTEM OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90



SYSTEM HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90



SYSTEM WALL WASHER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1250lm/m
 up to 85lm/W
 WW
 Frame | Minimal
 CRI80 | CRI90

3000K | 3500K | 4000K |
 Tunable White

CRI80 | CRI90 | CRI95

IP20

System | Stand-alone

Recessed | Surface mounted |
 Pendant

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor |
 Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management |
 Push notification

Finish



01
 White

04
 Black

12
 Aluminium



Visit our website
 for more information
 IN30 EVO available from
 September 2026



Santini Spa headquarters - Bergamo, Italy — Product: Isola - UGR<19 | Ø600 mm | White
Ph: Paolo Carlini



RECESSED

Ø600 | Ø900 | Ø1200 mm

3000K | 4000K | Tunable White

up to 24678lm

up to 153lm/W

GL | UGR<19

Other versions available

Ceiling luminaires p. 234

Pendants p. 160

Wall luminaires p. 212



Isola ceiling



Isola pendant



Isola wall

3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP40

3 Sizes

Class II

GL | UGR<19

Up & Down | Down emission

DALI-2

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



SQUARE RECESSED

600×600 | 625×625 mm

up to 4700lm

up to 160lm/W

UGR<19



RECTANGULAR RECESSED

1200×300 mm

up to 4700lm

up to 160lm/W

UGR<19

Other versions available

Ceiling luminaires p. 257



iPlan Next square ceiling mounted



iPlan Next rectangular ceiling mounted

Pendants p. 165



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K

CRI90

IP20 | IP40

3 sizes

Class II

UGR<19

Organic Response (control + sensor)

Casambi | Casambi sensor

DALI-2 | DALI-2 sensor

ON/OFF



Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification



Visit our website for more information

iPlan Next: ON/OFF, Casambi available from May 2026



SQUARE RECESSED

600×600 | 625×625 mm

up to 3700lm

up to 117lm/W

GL | UGR<19

Frame

Fixed

RECTANGULAR RECESSED

1200×300 mm

up to 3600lm

up to 111 lm/W

GL | UGR<19

Frame

Fixed

Other versions available

Ceiling luminaires p. 256



iPlan Access square ceiling mounted



iPlan Access rectangular ceiling mounted

Pendants p. 164



iPlan Access square pendant



iPlan Access rectangular pendant

3000K | 4000K

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

DALI-2

Lux and motion sensor



Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



FIXTURES FOR MAINS VOLTAGE TRACK



48 | SIPARIO




52 | PALCO/PALCO PRO



58 | VIEW



60 | NEWFO



62 | LE PERROQUET



66 | TACK



68 | TECNICA EVO



70 | BETWO



72 | SPACEPAD



74 | LIGHT SHED 14



76 | IN60 EVO



78 | MAINS VOLTAGE TRACK



Ø56

up to 1186lm

up to 79lm/W

S | M | F | WF | VWF

Opti Beam Lens |
Opti Beam Refractor



Ø73

up to 2162lm

up to 105 lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens
| Opti Beam Refractor



Ø86

up to 2376lm

up to 112lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens
| Opti Beam Refractor



Ø122

up to 3872lm

up to 111lm/W

SS | S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens
| Opti Beam Refractor



WALL WASHER Ø56

up to 1015lm

up to 67lm/W

WW

Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø73

up to 1198lm

up to 70lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø86

up to 1500lm

up to 83lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



WALL WASHER Ø122

up to 2325lm

up to 79lm/W

WW

Opti Beam Reflector |
Opti Beam Lens | Opti Beam Refractor



FRAMER Ø40

up to 35lm

9W

12°



ZOOM FRAMER Ø86

up to 960lm

20W

20° ÷ 32°



BEAMER Ø40

up to 400lm

10W

8.5° ÷ 56.5°



BEAMER Ø86

up to 1456lm

20W

13° ÷ 56°



RGBW Ø122

up to 1800lm

up to XXlm/W

M | F | WF | VWF

Opti Beam Lens |
Opti Beam Refractor

RGBW (White 3000K)



Other versions available

Fixtures for low voltage track p. 82

Wall luminaires p. 202 / Ceiling luminaires p. 236



Sipario Low Voltage



Sipario Low Voltage Wall Washer



Sipario Low Voltage with rod




Sipario Low Voltage Framer



Sipario Low Voltage Beamer



Sipario surface



Sipario recessed

ACCESSORIES OPTI BEAM REFRACTOR

- 1 Optibeam refractors
- 2 Honeycomb light flap
- 3 Cylindrical screen
- 4 Shutter blade
- 5 Directional flaps



- 2700K | 3000K | 3500K | 4000K | Tunable White | RGBW
- CRI90 | CRI97
- IP20
- 5 sizes
- Adjustable - Rotation 360° | Tilting 90°
- Opti Beam Reflector | Opti Beam Lens | Opti Beam Refractor
- Class I, II
- Casambi
- DALI-2
- Manual Dim

Smart Accessories for MV Track


- Organic Response (control + sensor)
- Casambi Sensor
- Casambi - DALI interface

Intelligent Light Solutions

- Smart controls:**
- Organic Response (control + sensor)
 - Quick BLE (Casambi)
 - Quick DALI
 - Master Pro Evo

Smart services:

- Space management | Push notification



Visit our website for more information

PALCO / PALCO PRO

design Artec Studio



C.P. Hart Showroom Waterloo-London, United Kingdom — Product: Palco - Palco | Ø102 mm | Black
Ph: James Newton



PALCO PRO Ø62 mm

up to 1366lm

up to 70lm/W

SS | S | M | F | WF | WW

Opti Beam Lens | Opti Beam Refractor

Class I, II



PALCO PRO Ø86 mm

up to 1776lm

up to 96lm/W

SS | S | M | F | WF | WW

Opti Beam Lens | Opti Beam Refractor

Class I, II



PALCO PRO Ø102 mm

up to 1978lm

up to 99lm/W

SS | S | M | F | WF | WW

Opti Beam Lens | Opti Beam Refractor

Class I, II



PALCO PRO Ø122 mm


up to 2736lm

up to 93lm/W

SS | S | M | F | WF | WW

Opti Beam Lens | Opti Beam Refractor

Class I, II

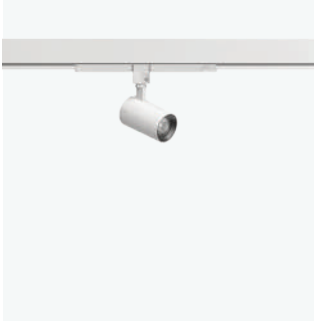

PALCO Ø62 mm

up to 1659lm

up to 99lm

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class II



PALCO Ø86 mm

up to 2605lm

up to 106lm

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class II



PALCO Ø102 mm

up to 2413lm

up to 91lm/W

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class I



PALCO Ø122 mm

up to 3393lm

up to 108lm/W

SS | S | M | F | WF

Opti Beam Reflector | Opti Beam Lens

Class I



PALCO Ø142 mm

up to 6429lm

up to 114lm/W

SS | S | M | F | WF

Opti Beam Reflector

Class I



PALCO WALL WASHER Ø86 mm

up to 1369lm

up to 56lm/W

WW

Opti Beam Lens

Class II



PALCO WALL WASHER Ø102 mm

up to 1248lm

up to 47lm/W

WW

Opti Beam Lens

Class I



PALCO WALL WASHER Ø122 mm

up to 1806lm

up to 57lm/W

WW

Opti Beam Lens

Class I



PALCO WALL WASHER Ø142 mm

up to 3463lm

up to 61lm/W

WW

Opti Beam Lens

Class I



PALCO FRAMER Ø37 mm

up to 38lm

Framer

Gobo 5° - 10°

Class II

M | F | WF



PALCO FRAMER Ø99 mm

up to 828lm

Framer

Gobo 30° - 40°

Class II

M | F | WF



PALCO FRAMER Ø115 mm

up to 1344lm

Framer

Gobo 30° - 40°

Class I

M | F | WF



Istanbul Modern Museum - Istanbul, Turkey — Product: Palco - Palco | Palco Wall Washer | Ø122 mm | White
Ph: Cemal Emden



RINASCENTE - Florence, Italy — Product: Palco - Palco | Ø102 mm | White
Ph: Paolo Bramati

Other versions available

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framers for Filorail



Palco Low Voltage Wall Washer for Filorail



Palco Low Voltage



Palco Low Voltage Wall Washer

Wall and ceiling luminaires p. 204




Palco surface



Palco Profilatore surface




Palco recessed



Palco Framers recessed


ACCESSORIES OPTI BEAM REFRACTOR

- 1 Interchangeable reflector
- 2 Refractor for medium elliptical distribution
- 3 Refractor for broad elliptical distribution
- 4 Soft Lens Filter
- 5 Honeycomb louvre
- 6 Cylindrical screen
- 7 Directional fins.

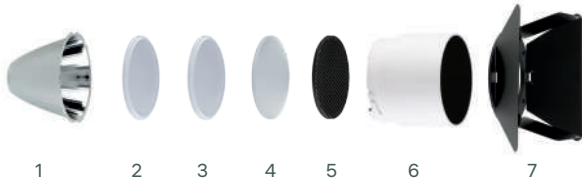

ACCESSORIES OPTI BEAM LENS

- 8 Opti Beam Refractor Medium
- 9 Opti Beam Refractor Flood
- 10 Opti Beam Refractor Wide Flood
- 11 Refractor for medium elliptical distribution
- 12 Refractor for broad elliptical distribution
- 13 Honeycomb louvre

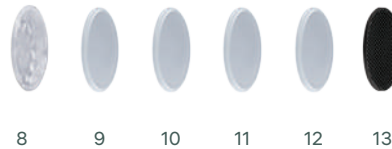

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90 | CRI97

IP20 | IP40

Class I, II

Opti Beam Reflector |

Opti Beam Lens | Opti Beam Refractor

DALI-2 | Casambi | Manual Dim

Casambi

Manual Dim

Finishes



01
White

04
Black



Other awards

Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface



Visit our website
for more information



Inside Out Centre for the Arts - Johannesburg, South Africa — Product: View
Ph: Brandon Barnard




130×110 mm
3000K | 4000K
up to 1530lm
up to 110lm/W
VWF



170×126 mm
3000K | 4000K
up to 3159lm
up to 113lm/W
VWF



210×146 mm
3000K | 4000K
up to 3813lm
up to 111lm/W
VWF

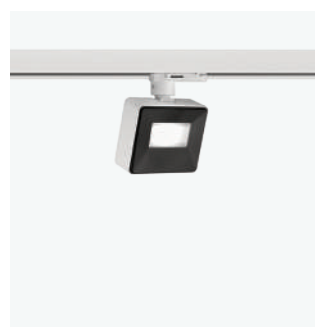

WALL WASHER 130×110 mm
3000K | 4000K
up to 1224lm
up to 89lm/W
WW




WALL WASHER 170x126 mm

3000K | 4000K

up to 2810lm

up to 101lm/W

WW

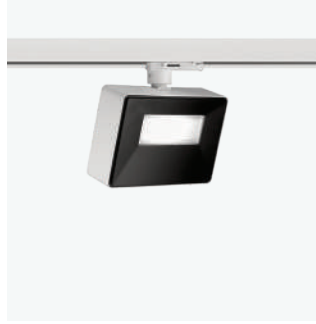

WALL WASHER 210x146 mm

3000K | 4000K

up to 3266lm

up to 95lm/W

WW

Other versions available

Wall luminaires p. 200



View
wall mounted

3000K | 4000K

CRI80 | CRI90 | CRI97

IP20

5 sizes

Rotation 360° | Tilting 90°

Class I, II

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes



04
Black



47
White/Black



Other awards
German Design Award 2019



Visit our website
for more information



**Ø88 mm
FOR MAINS VOLTAGE TRACK**

up to 1818lm

up to 101lm/W

S | M | F | WF

Class II

DALI-2 | Casambi

**Ø116 mm
FOR MAINS VOLTAGE TRACK**

up to 2519lm

up to 105lm/W

M | F | WF

Class II

DALI-2 | Casambi

**PENDANT Ø88 mm
FOR MAINS VOLTAGE TRACK**

up to 1818lm

up to 101lm/W

M | F | WF

Class II

DALI-2 | Casambi

**PENDANT Ø116 mm
FOR MAINS VOLTAGE TRACK**

up to 2519lm

up to 105lm/W

F | WF

Class II

DALI-2 | Casambi

Other versions available

Fixtures for low voltage track p. 94



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage



Newfo Low Voltage pendant



Newfo Low Voltage for Superrail



Newfo Low Voltage pendant for Superrail

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 360° | Tilting 350°

Optibeam Reflector |
Optibeam Lens | Optibeam Refractor

Class II

Casambi

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Body finishes



O1 White



O4 Black



N8 Titanium

Optical finishes



O4 Black



N8 Titanium



U7 Brass



V6 Matte copper



Visit our website for more information



Private office - Chicago, USA — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Nic Lehoux



Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



Ø156 mm

up to 3665lm

up to 98lm/W

S | F | WF



Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF



PENDANT Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



PENDANT Ø156 mm

up to 3665lm

up to 97lm/W

S | F | WF




PENDANT Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF

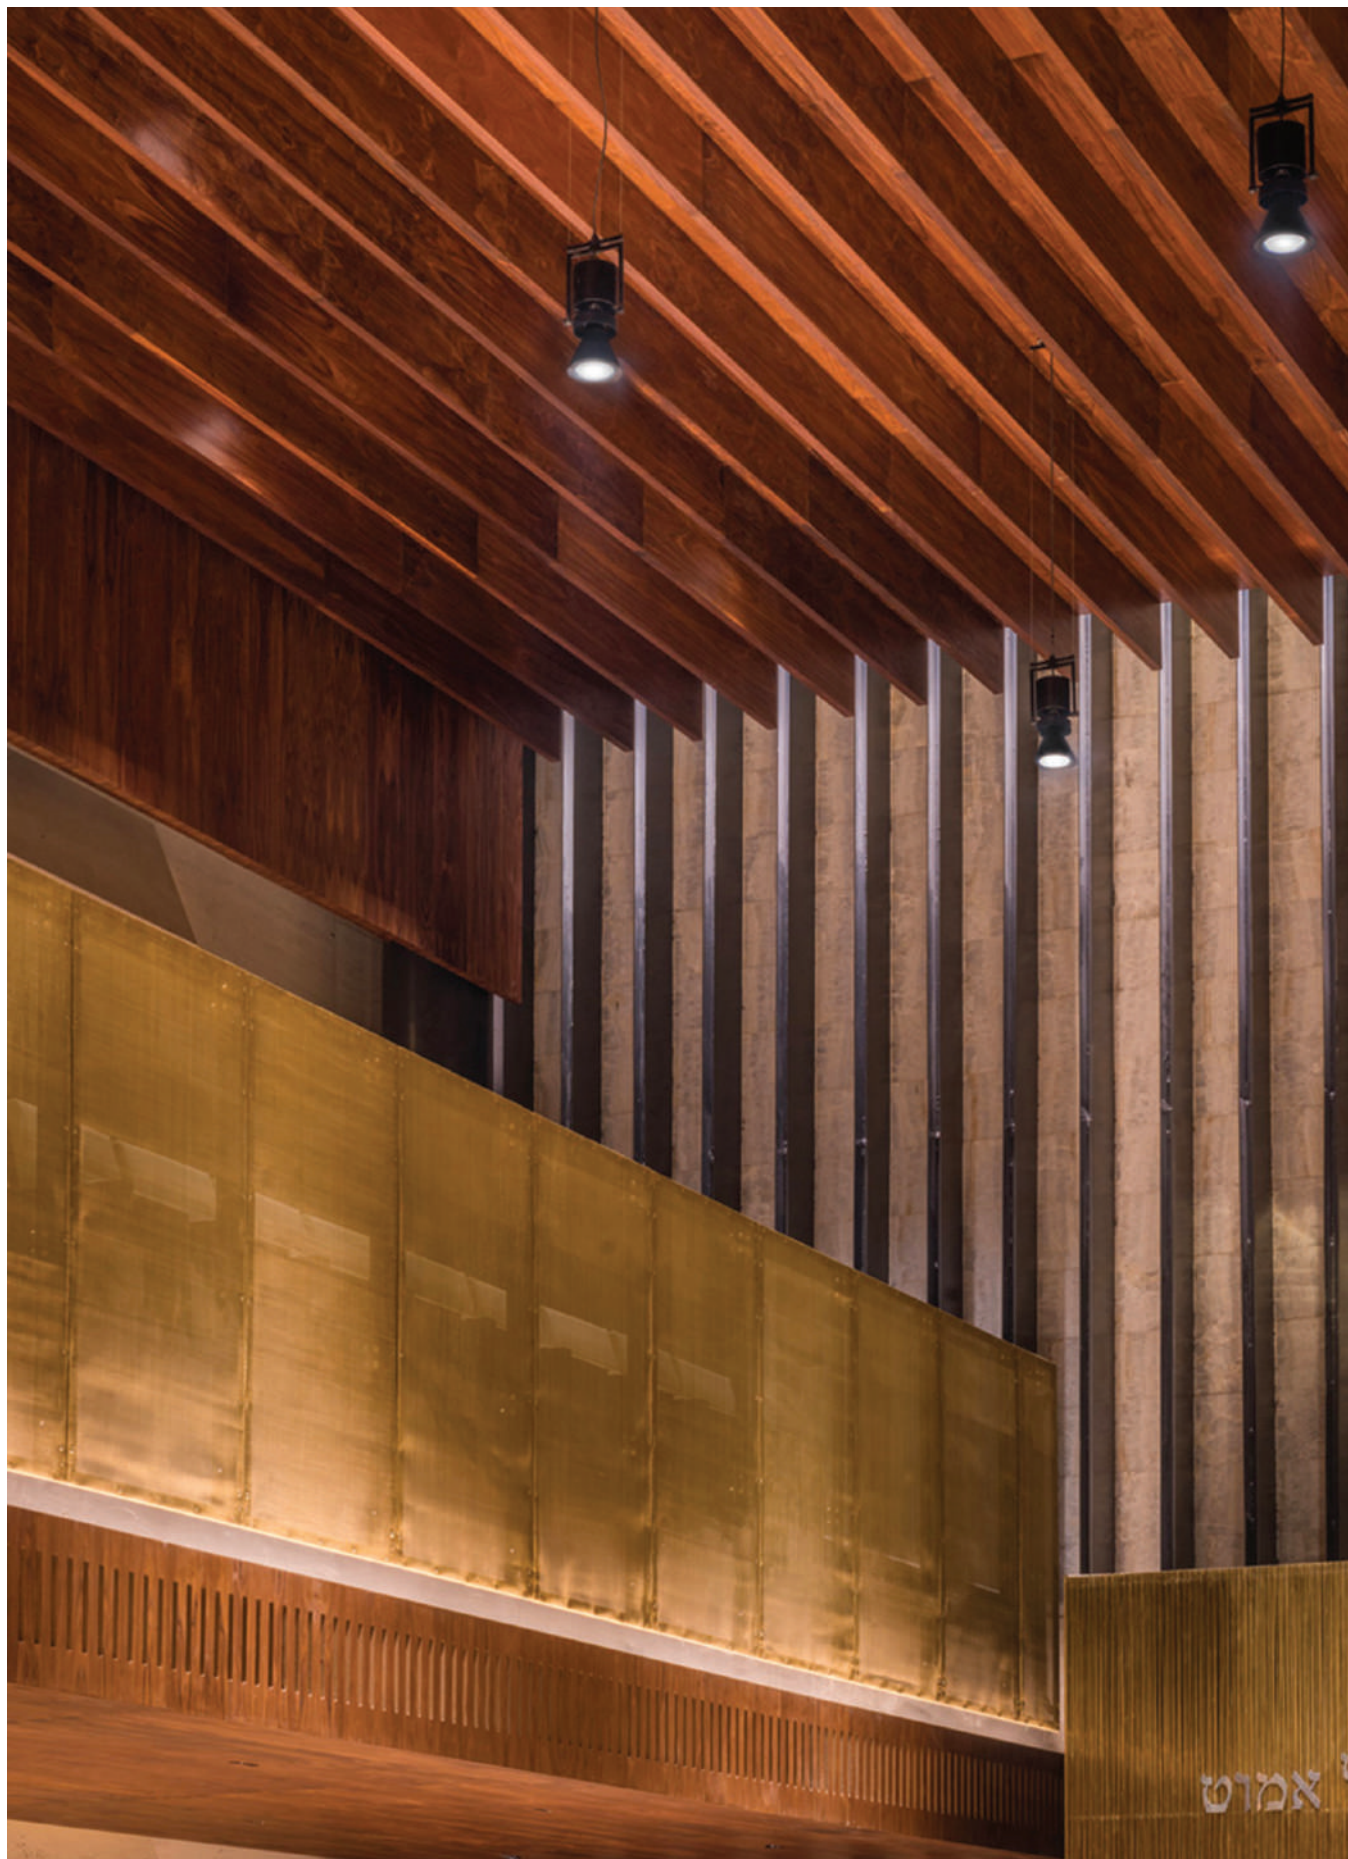

Marina Temple - Mexico City, Mexico — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Jaime Navarro

Other versions available

Fixtures for low voltage track p. 98



Le Perroquet for Filorail track



Le Perroquet pendant for Filorail

Wall luminaires p. 208



Le Perroquet wall/ceiling

Pendants p. 150



Le Perroquet pendant

Ceiling luminaires p. 242



Le Perroquet wall/ceiling



Le Perroquet recessed



Le Perroquet surface



Le Perroquet surface pendant

ACCESSORIES

- 1 Refractor for elliptical distribution
- 2 Cylindrical screen
- 3 Directional fins



1



2



3

3000K
 CRI90
 IP20 | IP40
 3 sizes
 OptiBeam Reflector
 Class I
 DALI-2
 Spot: Rotation 360° | Tilting 90°
 Pendant: Rotation 328° | Tilting 100°

Finishes



01 White



74 Grey/Black



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)
 Casambi Sensor
 Casambi - DALI interface



Visit our website for more information

TACK

design iGuzzini



Ø60 mm

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF



Ø60 mm PENDANT

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm PENDANT

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm PENDANT

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF


Other versions available

Downlights and recessed luminaires
p.30



Tack recessed

Pendants p. 155



Tack pendant

Ceiling luminaires p. 246



Tack ceiling

ACCESSORIES OPTI BEAM REFRACTOR

- 1 Honeycomb light flap
- 2 Transparen protective screen
- 3 Refractor for elliptical distribution
- 4 Soft lens filter
- 5 Accessory stop



3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 360° | Tilting 180°

Lens | Reflector

Class I

DALI-2

ON/OFF

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification


Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes



Visit our website
for more information



Seville Nautical Club - Seville, Spain — Product: Tecnica Evo - Ø92 mm | White
Ph: Courtesy of Jacinto Pérez Elliot Arquitectura



Ø92 mm

3000K | 4000K

up to 3487lm

up to 132lm/W

M | F | WF



Ø117 mm

3000K | 4000K

up to 5263lm

up to 143lm/W

M | F | WF | VWF




Ø117 mm FOOD

2700K | 3000K | 6500K

up to 3867lm

up to 127lm/W

F

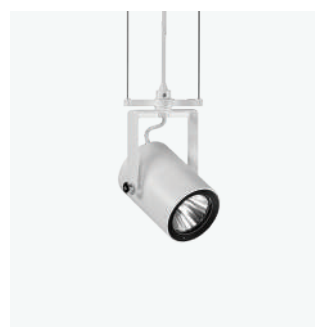

Ø92 mm PENDANT

3000K | 4000K

up to 3506lm

up to 126lm/W

M | F | WF



Ø117 mm PENDANT

3000K | 4000K

up to 5263lm

up to 137lm/W

M | F | WF | VWF



Ø117 mm FOOD PENDANT

2700K | 3000K | 6500K


up to 3849lm

up to 101lm/W

F

Other versions available

Downlights and recessed luminaires
p. 32



Tecnica Evo
recessed

Pendants p. 154



Tecnica Evo
pendant

ACCESSORIES

- 1 Interchangeable reflector
- 2 Safety glass
- 3 Refractor for elliptical distribution
- 4 Soft Lens Filter
- 5 Honeycomb louvre



1



2



3



4



5

2700K | 3000K | 4000K | 6500K

CRI80 | CRI90

IP20

2 sizes

Spot: Rotation 360° | Tilting 90°
Pendant: Rotation 360° | Tilting 90°

Reflector

Food version

Class I

DALI-2

ON/OFF

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification


Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes



01
White

04
Black



Visit our website
for more information



Product: Betwo - Pendant | UGR<19 | White champagne/White transparent
Ph: Paolo Carlini



GENERAL LIGHTING

Ø172 | Ø234 mm

up to 4354lm

up to 122lm/W

DALI-2



UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W

DALI-2



PURE GENERAL LIGHTING

Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W

DALI-2




Other versions available

Pendants p. 152



BeTwo pendant

Ceiling luminaires p. 228



BeTwo ceiling

3000K | 3500K | 4000K

CRI90

IP40

2 sizes

Opti Diamond

Class I

DALI-2

Adapter for installation on track to be order separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Optical finish

D8 White

Body finishes

G0 White/White

G2 Black/Black

I1 White/Champagne

I3 Black/Champagne

R4 White/Transparent

R5 Black/Transparent

R6 Champagne/Transparent

Optical finish

D8 Black

Body finishes

G1 White/White

I2 Black/Black

I4 White/Champagne

M6 Black/Champagne

R7 White/Transparent

R8 Black/Transparent


R9 Champagne/Transparent



Visit our website for more information



Tenoha - Milan, Italy — Product: Spacepad - UGR<19 | 415×140 mm | Matte black/ White transparent
Ph: Paolo Carlini

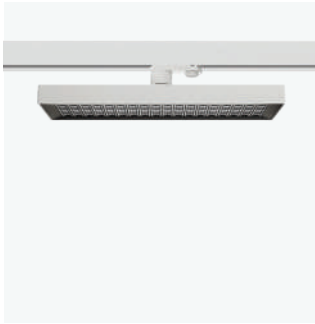

GENERAL LIGHTING

415x140 mm
 up to 4350lm
 up to 164lm/W
 Opti Diamond



UGR<19

415x140 mm
 up to 2480lm
 up to 166lm/W
 Opti Diamond



GENERAL LIGHTING 880x140 mm

880x140 mm
 up to 8734lm
 up to 170lm/W
 Opti Diamond



UGR<19 880x140 mm

880x140 mm
 up to 5611lm
 up to 176lm/W
 Opti Diamond

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20

2 sizes

Adjustable

Rotation 360°

Opti Diamond

Class I

Organic Response (control + sensor)

Casambi

DALI-2

DALI-2 sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Body finishes



O1
White



V0
Matte black

Optical finishes



D8
White transparent



83
Black transparent



Visit our website
for more information

LIGHT SHED 14

design iGuzzini



Park Associati Studio - Milan, Italy — Product: Light shed 14 - Pendant | 1200 mm | White/ White transparent
Ph: Paolo Carlini



TRACK

1200 | 1600 | 2400 | 3000 mm

up to 6500lm

up to 147lm/W

UGR<19

Opti Diamond

Class I

DALI-2

Other versions available

Pendants p. 130



Light Shed 14
pendant

Ceiling luminaries p. 247



Light Shed 14
ceiling

3000K | 4000K

CRI80 | CRI90

IP20

4 lengths

Opti Diamond - UGR<19

Emergency

Class I

Organic Response (control + sensor)

Casambi

DALI-2

DALI-2 sensor

Adapter for installation on rail to be
ordered separately

Body finishes



01
White



04
Black

Optical finishes



D8
White transparent



83
Black transparent

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface



Visit our website
for more information



Santini Spa headquarters - Bergamo, Italy — Product: iN60 Evo - System MPO | UGR<19 | Black
Ph: Paolo Carlini



SYSTEM SPACE

White transparent | Black transparent
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K |
Tunable White
up to 6059lm/m
up to 169lm/W
GL | UGR<19
Up & Down adjustable emission



SYSTEM MMO

Metalized Modular Optic
1200 | 2400 mm
LED Module
3000K | 3500K | 4000K |
Tunable White
up to 5696lm/m
up to 154lm/W
UGR<19



SYSTEM MPO

Micro Prismatic Optic
600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 1596lm/m
up to 141lm/W
UGR<19
Angular luminous module



SYSTEM OPAL

600 | 900 | 1200 | 3600 mm
LED Module - Roll Screen
3000K | 3500K | 4000K
up to 4898lm/m
up to 147lm/W
GL
Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1642lm/m

up to 104lm/W


WW

Other versions available


Downlights and recessed luminaires p. 76 / Linear system p. 180




iN60 Evo System Space



iN60 Evo System MMO



iN60 Evo System MPO



iN60 Evo System Opal



iN60 Evo System Wall Washer

Pendants p. 137



iN60 Evo Stand-alone Space



iN60 Evo Stand-alone MMO



iN60 Evo Stand-alone MPO



iN60 Evo Stand-alone Opal



iN60 Evo System Space



iN60 Evo System MMO



iN60 Evo System MPO



iN60 Evo System Opal



iN60 Evo System Wall Washer

Smart accessories for iN60 Evo




Organic Response lux and motion sensor



Casambi lux and motion sensor



DALI-2 lux and motion sensor



Casambi-DALI control interface



Li-Fi transceiver module

3000K | 3500K | 4000K | Tunable White (2700K ÷ 6500K)

CRI80 | CRI90

IP20

GL | UGR<19 | WW

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

For track installation, the dedicated accessory PF99 is required

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification


Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes



Visit our website for more information

MAINS VOLTAGE TRACK

design iGuzzini



Royal Museum for Fine Arts (KMKSA) - Antwerp, Belgium — Product: Mains voltage track - Ceiling/Pendant | White
Ph: Kris Dekeijser



RECESSED

1000 | 2000 | 3000 | 4000 mm



CEILING/PENDANT

1000 | 2000 | 3000 | 4000 mm

Smart accessories for mains voltage track



Casambi
lux/motion
multi-sensor

IP20 | IP40

4 lengths




Smart Accessories for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Finishes

-  12 Aluminium
-  01 White
-  04 Black




Visit our website
for more information



FIXTURES FOR LOW VOLTAGE TRACK




82 | SIPARIO LV




86 | PALCO




92 | ROBIN



94 | NEWFO



98 | LE PERROQUET



100 | LASER



102 | LASER BLADE XS



106 | LIBERA



108 | FILORAIL




114 | SUPERRAIL



120 | LOW VOLTAGE TRACK





FOR FILORAIL Ø22

up to 161lm

up to 47lm/W

S | M

Opti Beam Lens



FOR FILORAIL Ø40

up to 650lm

up to 60lm/W

M | F | WF

Opti Beam Lens



FOR FILORAIL Ø56

up to 1180lm

up to 85lm/W

S | M | F | WF | VWF | WW

Opti Beam Lens |



FOR FILORAIL Ø73

up to 2160lm

up to 108lm/W

S | M | F | WF | VWF | WW

Opti Beam Reflector
| Opti Beam Lens




FOR FILORAIL Ø86

up to 2370lm

up to 117lm/W

S | M | F | WF | VWF | WW

Opti Beam Reflector |
Opti Beam Lens



BEAMER FOR FILORAIL Ø22

up to 27lm


beamer



BEAMER FOR FILORAIL Ø40

up to 27lm

beamer



FRAMER FOR FILORAIL Ø22

up to 38lm

framer



FRAMER FOR FILORAIL Ø40

up to 5lm

beamer



FOR LOW VOLTAGE Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE Ø40 mm

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



FOR LOW VOLTAGE Ø56 mm

up to 1180lm

up to 85lm/W

S | M | F | WF | VWF

Opti Beam Lens



FOR LOW VOLTAGE Ø73 mm

up to 2160lm

up to 108lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens



FOR LOW VOLTAGE Ø86 mm

up to 2370lm

up to 117lm/W

S | M | F | WF | VWF

Opti Beam Reflector | Opti Beam Lens



FOR LOW VOLTAGE WALL WASHER

up to 1115lm

up to 73lm/W

WW

Opti Beam Lens



FOR LOW VOLTAGE WALL WASHER Ø73 mm

up to 1200lm

up to 75lm/W

WW

Opti Beam Lens



LOW VOLTAGE WALL WASHER Ø86 mm

up to 1500lm

up to 88lm/W

WW

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø40 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE BEAMER Ø86 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø22 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø40 mm

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE FRAMER Ø40 mm FOR SUPERRAIL

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



FOR LOW VOLTAGE Ø22 mm WITH ROD

up to 160lm

up to 47lm/W

S | M

Opti Beam Lens



Other versions available

Fixtures for mains voltage track p. 48

Wall and ceiling luminaires p. 202



Sipario



Sipario Framed



Sipario surface



Sipario recessed

**FOR LOW VOLTAGE
Ø40 mm WITH ROD**

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens

ACCESSORIES OPTI BEAM REFRACTOR

- 1 Optibeam refractors
- 2 Honeycomb light flap
- 3 Cylindrical screen
- 4 Shutter blade
- 5 Directional flaps



2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

5 sizes

Adjustable - Rotation 360° |
Tilting 90°

Opti Beam Reflector | Opti Beam Lens |
Opti Beam Refractor

Casambi

DALI Broadcast | DALI Powerline

Class III

**Smart Accessory
for Superrail and Filorail**

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White




V0
Matte black



Visit our website
for more information
Sipario LV: beamer,
framer, rod available from
April 2026



Roman Forum Museum - Cartagena, Spain — Product: Palco - Ø37 mm | Black
Ph: Courtesy of Amann-Cánovas-Maruri



**LOW VOLTAGE
Ø19 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 154lm

up to 45lm/W

S | M

DALI Broadcast



**LOW VOLTAGE
Ø37 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 578lm

up to 60lm/W

S | M | WF

DALI Broadcast



**LOW VOLTAGE
Ø51 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 1198lm

up to 75lm/W

S | F | WF

DALI Powerline | Casambi



**LOW VOLTAGE
Ø62 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 1856lm

up to 94lm/W

S | F | WF

DALI Powerline | Casambi



**LOW VOLTAGE
Ø86 mm FOR FILORAIL**


2700K | 3000K | 3500 | 4000K

up to 2613lm

up to 102lm/W

S | M | F | WF

DALI Powerline | Casambi



**LOW VOLTAGE BEAMER
Ø19 mm FOR FILORAIL**


2700K | 3000K | 3500 | 4000K

up to 28lm

Beamer

10° - 65°

DALI Broadcast



**LOW VOLTAGE FRAMER
Ø19 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 30lm

Framer

DALI Broadcast



**LOW VOLTAGE FRAMER
Ø37 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 38lm

Framer

12°

DALI Broadcast



**LOW VOLTAGE WALL WASHER
Ø51 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 296lm

up to 94lm/W

WW

DALI Powerline | Casambi



**LOW VOLTAGE WALL WASHER
Ø86 mm FOR FILORAIL**

2700K | 3000K | 3500 | 4000K

up to 1373lm


up to 61lm/W

WW

DALI Powerline | Casambi



The Courtauld Gallery - London, United Kingdom — Product: Palco - Ø51 mm | White
Ph: David Levene, courtesy of Courtauld Gallery

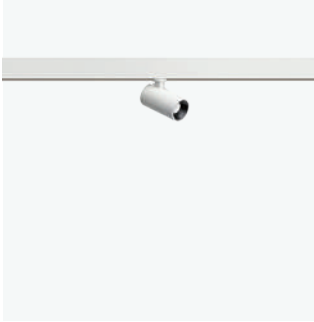

LOW VOLTAGE Ø19 mm

2700K | 3000K | 3500K | 4000K

up to 308lm

up to 60lm/W

S | M

DALI Powerline | Casambi



LOW VOLTAGE Ø37 mm


2700K | 3000K | 3500K | 4000K

up to 578lm

up to 60lm/W

S | M | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø51 mm

2700K | 3000K | 3500K | 4000K

up to 1198lm

up to 74lm/W

S | F | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø62 mm

2700K | 3000K | 3500K | 4000K

up to 1856lm

up to 94lm/W

S | F | WF

DALI Powerline | Casambi



LOW VOLTAGE Ø86 mm

2700K | 3000K | 3500K | 4000K

up to 2613lm

up to 102lm/W

S | M | F | WF

DALI Powerline | Casambi



**LOW VOLTAGE Ø51 mm
WALL WASHER**

2700K | 3000K | 3500K | 4000K

up to 297lm

up to 19lm/W

WW

DALI Powerline | Casambi



**LOW VOLTAGE Ø86 mm
WALL WASHER**


2700K | 3000K | 3500K | 4000K

up to 1373lm

up to 61lm/W

WW

DALI Powerline | Casambi



LOW VOLTAGE Ø19 mm FRAMER

2700K | 3000K | 3500K | 4000K

up to 30lm

Framer

DALI Powerline | Casambi




LOW VOLTAGE Ø37 mm FRAMER

2700K | 3000K | 3500K | 4000K

up to 180lm

Framer

DALI Powerline | Casambi



LOW VOLTAGE Ø19 mm BEAMER

2700K | 3000K | 3500K | 4000K

up to 109lm

Beamer

DALI Powerline | Casambi



LOW VOLTAGE Ø19 mm WITH ROD

2700K | 3000K | 4000K

up to 154lm

up to 45lm/W

M

DALI Powerline | Casambi



LOW VOLTAGE Ø37 mm WITH ROD

2700K | 3000K | 4000K

up to 578lm

up to 60 lm/W

M | WF


DALI Powerline | Casambi



Fiandre's historic headquarters - Castellarano, Italy — Product: Palco - Ø37 mm | Black
Ph: Fabio Mantovani, courtesy of Fiandre

Other versions available

Fixtures for mains voltage track p. 52

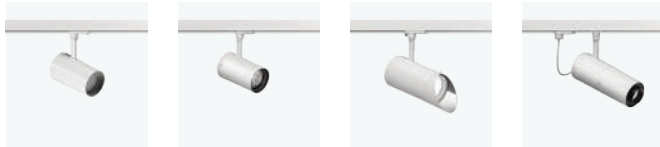

Palco Pro Palco Palco Wall Washer Palco Frammer

Wall and ceiling luminaires p. 204




Palco surface Palco Frammer surface Palco recessed Palco Frammer recessed

ACCESSORIES


OPTI BEAM REFRACTOR WITH ACCESSORIES

- 1 Interchangeable reflector (only Ø86 mm)
- 2 Refractor for medium elliptical distribution
- 3 Refractor for broad elliptical distribution
- 4 Soft Lens Filter
- 5 Honeycomb louvre
- 6 Cylindrical screen
- 7 Directional fins.

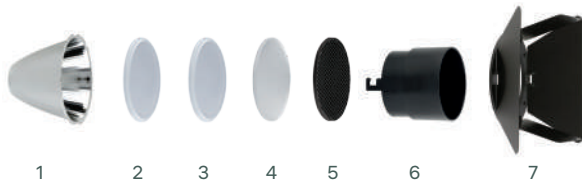

OPTI BEAM LENS WITH ACCESSORIES

- 8 Spill ring
- 9 Opti Beam Refractor Medium (only Ø86 mm)
- 10 Opti Beam Refractor Flood (only Ø86 mm)
- 11 Opti Beam Refractor Wide Flood (only Ø86 mm)
- 12 Refractor for medium elliptical distribution
- 13 Refractor for broad elliptical distribution
- 14 Honeycomb louvre
- 15 Cylindrical screen

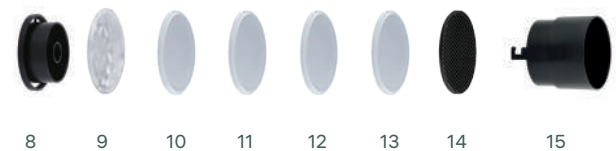

2700K | 3000K | 3500K | 4000K
 CRI80 | CRI90 | CRI97
 IP20 | IP40
 Class III
 Opti Beam Reflector | Opti Beam Lens
 Casambi
 DALI Broadcast | DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions


Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification

Finishes




Other awards
 Premio dei premi per l'innovazione 2018
 CODEGA 2018
 German Design Award 2018
 Delta award 2018
 Progress Report Selection 2020



Visit our website for more information



University Of Texas Dallas - Arts and Performance Center (UTD APC) Dallas, Texas, USA — Product: Robin - Ø51 mm for Low Voltage track | Black
Ph: Mauricio Rojas

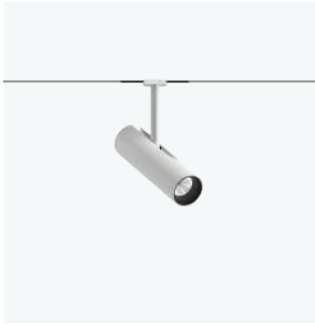

Ø37 mm FOR FILORAIL

up to 652lm

up to 59lm/W

S | M | WF



Ø51 mm FOR FILORAIL

up to 1344lm

up to 74lm/W

S | F | WF



Ø62 mm FOR FILORAIL

up to 2415lm

up to 98lm/W

S | F | WF



Ø51 mm WALL WASHER FOR FILORAIL

up to 328lm

up to 18lm/W

WW



Ø37 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 652lm

up to 59lm/W

S | M | WF



Ø51 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 1344lm

up to 74lm/W

S | F | WF



Ø62 mm FOR LOW VOLTAGE TRACK / SUPERRAIL

up to 2415lm

up to 98lm/W

S | F | WF



Ø51 mm WALL WASHER FOR LOW VOLTAGE TRACK / SUPERRAIL


up to 328lm

up to 18lm/W

WW

ACCESSORIES

- 1 Refractor for elliptical distribution
- 2 Honeycomb louvre
- 3 Spill ring
- 4 Cylindrical screen
- 5 Decorative cylindrical screen

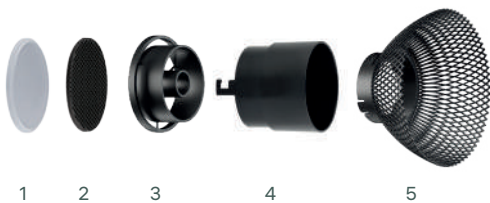

2700K | 3000K | 3500 | 4000K

CRI90

IP20

Class III

Opti Beam Lens

Casambi

DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



Visit our website for more information



Product: Newfo - Ø88 mm for Filorail | Matte black



LOW VOLTAGE Ø62 mm FOR FILORAIL


up to 896lm

up to 87lm/W

S | M | F | WF

Class III

DALI Broadcast

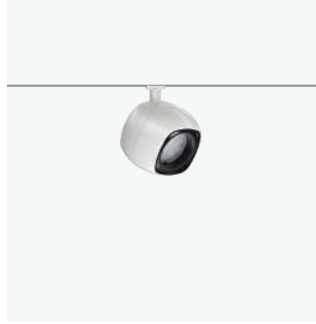

LOW VOLTAGE Ø88 mm FOR FILORAIL


up to 1818lm

up to 108lm/W

M | F | WF

Class III

DALI Powerline | Casambi

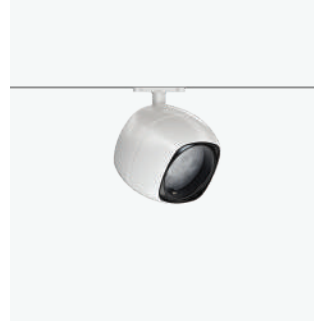

LOW VOLTAGE Ø116 mm FOR FILORAIL


up to 2519lm

up to 114lm/W

M | F | WF

Class III

DALI Powerline | Casambi

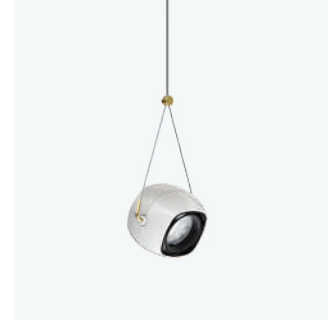

LOW VOLTAGE PENDANT Ø88 mm FOR LOW VOLTAGE TRACK AND FILORAIL

up to 1818lm

up to 108lm/W

F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE PENDANT Ø116 mm FOR LOW VOLTAGE TRACK, FILO-RAIL AND SUPERRAIL

up to 2519lm

up to 114lm/W

F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE Ø62 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 1145lm

up to 87lm/W

S | M | F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE Ø88 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 1818lm

up to 108lm/W

S | M | F | WF

Class III

DALI Powerline | Casambi



LOW VOLTAGE Ø116 mm FOR LOW VOLTAGE TRACK AND SUPERRAIL

up to 2519lm

up to 114lm/W

S | M | F | WF

Class III

DALI Powerline | Casambi



Other versions available

Fixtures for mains voltage track p. 60



Newfo



Newfo pendant




Newfo surface




Newfo recessed



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

Wall luminaires p. 210

Ceiling luminaires

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

3 sizes

Rotation 360° | Tilting 90°

Optibeam Reflector | Optibeam Lens

Class III

Casambi

DALI Broadcast | DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



O1
White



O4
Black



N8
Titanium

Optical finishes



O4
Black



N8
Titanium



U7
Brass



V6
Matte copper



Visit our website
for more information

LE PERROQUET

design Piano Design





Ø55 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



Ø80 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 1436lm

up to 97lm/W

M | F | WF



PENDANT Ø55 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



PENDANT Ø80 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 1436lm

up to 97lm/W

Other versions available

Fixtures for mains voltage track p. 62

Pendants p. 150

Wall luminaires p. 208 / Ceiling luminaires p. 242



Le Perroquet



Le Perroquet
pendant



Le Perroquet
pendant



Le Perroquet



Le Perroquet
pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20

3 sizes

OptiBeam Lens | OptiBeam Reflector

Class III

Casambi

DALI Powerline

Rotation 360° | Tilting 90°

Smart Accessory for Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI







Master Pro Evo

Smart services:

Space management |

Push notification

Finishes

-  01 White
-  06 Yellow
-  02 Orange
-  04 Black
-  05 Red
-  09 Sky blue



Visit our website
for more information



DENA offices. EUREF-Campus - Berlin, Germany — Product: Laser - Pendant Ø59 mm | Black
Ph: Felix Löchner



PENDANT FOR FILORAIL

Ø59 | Ø75
 2700K | 3000K | 3500K | 4000K
 CRI90
 up to 1615lm
 up to 107lm/W
 M | F



PENDANT FOR LOW VOLTAGE TRACK

Ø59 | Ø75
 2700K | 3000K | 4000K
 CRI90
 up to 1615lm
 up to 107lm/W
 M | F

Other versions available

Downlights and recessed luminaires p. 28



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Washer round



Laser Wall Washer square

Pendants p. 156

Ceiling luminaires p. 230



Laser pendant



Laser Surface

2700K | 3000K | 3500K | 4000K

CRI90

IP20

2 sizes

Class III

Casambi

DALI Powerline

Smart Accessory for Superrail and Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01 White



04 Black

Optical finishes



01 White



14 Gold



E8 Gold-satin



E7 Chrome



E6 Burnished chrome



04 Black




Other awards
 FX International Interior Design Award 2016



Visit our website for more information

LASER BLADE XS

design iGuzzini

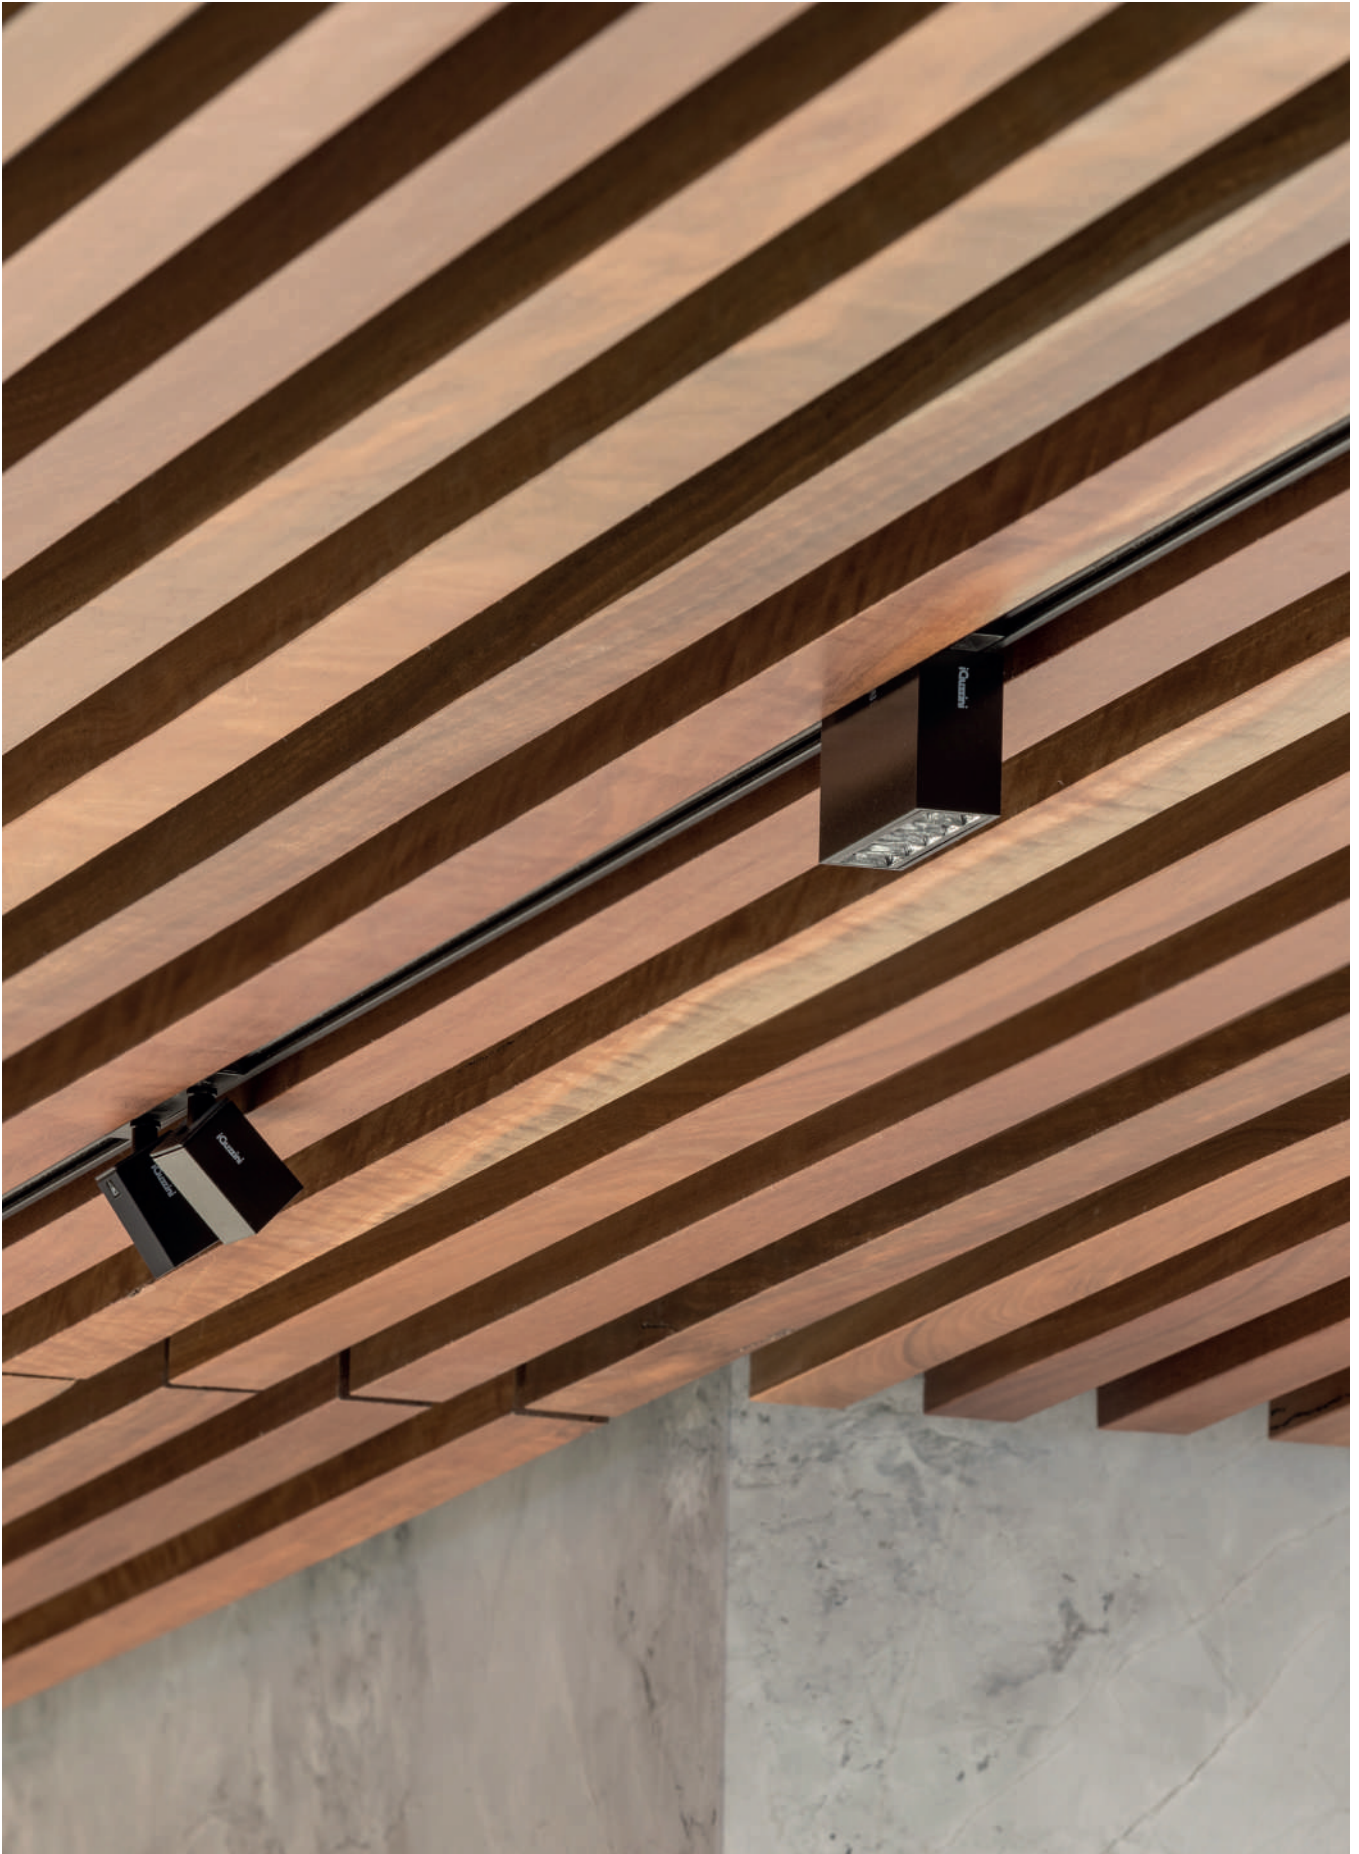

Product: Laser Blade XS - High Contrast | 5 cells | Black/black




HIGH CONTRAST PENDANT FOR FILORAIL

1 | 2x2 | 3x3 cells
2700K | 3000K | 3500K | 4000K
up to 1700lm
up to 98lm/W
F | WF




HIGH CONTRAST FOR FILORAIL

1 | 5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1839lm
up to 100lm/W
F



WALL WASHER LGC FOR FILORAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 648lm
up to 35lm/W
WW-LGC



GENERAL LIGHTING PRO FOR FILORAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1664lm
up to 90lm/W
GL-PRO



HIGH CONTRAST FOR LOW VOLTAGE TRACK

1 | 5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 2033lm
up to 93lm/W
F



WALL WASHER FOR LOW VOLTAGE TRACK

10 cells
2700K | 3000K | 4000K
up to 836lm
up to 45lm/W
WW



GENERAL LIGHTING PRO FOR LOW VOLTAGE TRACK

5 | 10 cells
2700K | 3000K | 4000K
up to 1690lm
up to 77lm/W
GL-PRO



HIGH CONTRAST PENDANT FOR LOW VOLTAGE TRACK

1 | 2x2 | 3x3 cells
2700K | 3000K | 3500K | 4000K
up to 1535lm
up to 90lm/W
F | WF



HIGH CONTRAST FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 1867lm
up to 85lm/W
F



GENERAL LIGHTING PRO FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 4000K
up to 1552lm
up to 70lm/W
GL-PRO



WALL WASHER LGC FOR SUPERRAIL

5 | 10 cells
2700K | 3000K | 3500K | 4000K
up to 640lm
up to 35lm/W
WW-LGC

LASER BLADE XS

design iGuzzini



Villa Waterfall - Porto Cervo, Italy — Product: Laser Blade XS - High Contrast | 5 cells | Black/black
Ph: Stefano Ferrando, Studio Vetroblu

Other versions available

Downlights and recessed luminaires p. 28



Laser Blade XS
High Contrast



Laser Blade XS
Wall Washer
LGC



Laser Blade XS
Wall Washer



Laser Blade XS
General lighting
Pro



Laser Blade XS
High Contrast -
adjustable

Pendants p. 158

Ceiling luminaires p. 226



Laser Blade XS
High Contrast -
pendant



Laser Blade XS
High Contrast -
ceiling



Laser Blade XS
Wall Washer -
ceiling



Laser Blade XS
General lighting
Pro - ceiling

2700K | 3000K | 3500K | 4000K |
Tunable White (2700K - 5700K)

CRI80 | CRI90

IP20 | IP43

8 sizes

Fixed | Adjustable

Frame | Minimal

Class II, III

DALI-2 | DALI Broadcast

Power supply to be ordered
separately (Class III)

**Smart Accessory
for Superrail and Filorail**

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI







Master Pro Evo

Smart services:





Space management |

Push notification

Body finishes

-  01 White
-  C1 Traffic white
-  B1 Signal white
-  15 Grey
-  04 Black
-  V0 Matte black

Optical finishes

-  01 White
-  04 Black
-  14 Gold
-  E6 Burnished chrome



Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019



Visit our website
for more information



Fiandre's historic headquarters - Castellarano, Italy — Product: Libera - 1400 mm | UGR<19 | Black/White transparent
Ph: Fabio Mantovani, courtesy of Fiandre



STAND-ALONE PENDANT FOR FILORAIL

1200 | 1400 | 1800 mm
 2700K | 3000K | 3500K | 4000K
 up to 3527lm
 up to 126lm/W
 GL | UGR<19

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2

Other versions available

Pendants p. 128



Libera System - pendant



Libera stand-alone pendant



Libera System - wall



Libera stand-alone wall mounted

Wall luminaires p. 198

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone floor



Libera stand-alone ceiling to floor

Linear system p. 182



Libera System - pendant



Libera System - Space lighting modules



Libera System - General Lighting modules



Libera System - general lighting modules without screen



Libera System - Led strip for Up light



Libera System - mounting and power supply accessories

2700K | 3000K | 3500K | 4000K

CRI90

6 lengths

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic response (control + sensor)

Casambi | Casambi Sensor

DALI Broadcast | DALI Powerline | DALI-2 Sensor

IP20 | IP40

Class III

Smart Accessory for Filorail

Casambi Sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01 White



04 Black



N8 Titanium



N9 Sapphire

Optical finishes



R4 White transparent



83 Black Transparent



Other awards

BrightStar Award 2024


Grand Prix du Design (Gold and Platinum) 2024

Production Innovation Award 2024

Good Design 2024



Visit our website for more information



FILORAIL CEILING/PENDANT

DALI Broadcast | DALI Powerline |
Casambi



FILORAIL RECESSED MINIMAL

DALI Broadcast | DALI Powerline |
Casambi



FILORAIL RECESSED FRAME


DALI Broadcast | DALI Powerline |
Casambi

TOOLS

DALI Broadcast



PALCO LOW VOLTAGE
Ø19 / 37 mm
FOR FILORAIL DALI BROADCAST
 up to 578lm
 up to 60lm/W
 S | M | WF

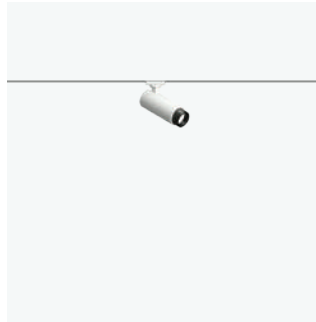

PALCO LOW VOLTAGE BEAMER
Ø19 mm
FOR FILORAIL DALI BROADCAST
 up to 28lm
 Beamer
 10°-65°



PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm
FOR FILORAIL DALI BROADCAST
 up to 38lm
 Framer
 12°



SIPARIO LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST
 up to 650lm
 up to 60lm/W
 M | F | WF
 Opti Beam Lens



SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST
 up to 27lm
 beamer



SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR FILORAIL DALI BROADCAST
 up to 5lm
 beamer



NEWFO Ø62 mm
FOR FILORAIL DALI BROADCAST
 up to 896lm
 up to 87lm/W
 S | M | F | WF



LASER BLADE XS HIGH CONTRAST
1 CELL FOR FILORAIL DALI
BROADCAST
 up to 201lm
 up to 60lm/W
 F



LASER BLADE XS HIGH CONTRAST
PENDANT 1 CEL
FOR FILORAIL DALI BROADCAST
 up to 201lm
 up to 61lm/W
 F



LIBERA STAND-ALONE PENDANT
FOR FILORAIL DALI BROADCAST
 up to 3527lm
 up to 126lm/W
 GL | UGR<19

DALI Powerline



**PALCO LOW VOLTAGE
Ø51 / 62 / 86 mm
FOR FILORAIL DALI POWERLINE**
up to 2613lm
up to 102lm/W
S | M | F | WF



**PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR FILORAIL DALI POWERLINE**
up to 1373lm
up to 61lm/W
WW



**SIPARIO LOW VOLTAGE
Ø56 / 73 / 86 mm
FOR FILORAIL DALI BROADCAST**
up to 650lm
up to 60lm/W
M | F | WF
Opti Beam Lens



**ROBIN Ø37 / 51 / 62 mm
FOR FILORAIL DALI POWERLINE**
up to 2415lm
up to 98lm/W
S | M | F | WF



**ROBIN WALL WASHER Ø51 mm
FOR FILORAIL DALI POWERLINE**
up to 328lm
up to 18lm/W
WW



**NEWFO Ø88 / 116 mm
FOR FILORAIL DALI POWERLINE**
up to 2519lm
up to 114lm/W
M | F | WF



**NEWFO PENDANT Ø88 / 116 mm
FOR FILORAIL DALI POWERLINE**
up to 2519lm
up to 114lm/W
F | WF



**LE PERROQUET Ø55 / 80 mm
FOR FILORAIL DALI POWERLINE**
up to 1436lm
up to 97lm/W
S | M | F | WF



**LE PERROQUET Ø55 / 80 mm
FOR FILORAIL DALI POWERLINE**
up to 1436lm
up to 97lm/W
S | M | F | WF



**LIBERA STAND-ALONE PENDANT
FOR FILORAIL DALI POWERLINE**
up to 4017lm
up to 150lm/W
M | F




**LASER BLADE XS HIGH CONTRAST
5 - 10 CELLS FOR FILORAIL DALI
POWERLINE**
up to 1839lm
up to 100lm/W
F



**LASER BLADE XS GENERAL
LIGHTING PRO 5 - 10 CELLS
FOR FILORAIL DALI POWERLINE**
up to 1664lm
up to 90lm/W
GL-PRO



DALI Powerline



LASER BLADE XS WALL WASHER
LGC 5 - 10 CELLS FOR FILORAIL
DALI POWERLINE

up to 648lm

up to 35lm/W

WW-LGC




LASER BLADE XS HIGH CONTRAST
PENDANT 1 - 4 - 9 CELLS
FOR FILORAIL DALI POWERLINE

up to 1700lm

up to 98lm/W

M | F

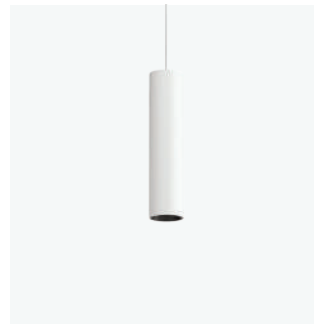

LASER PENDANT Ø59 / 75 mm
FOR FILORAIL DALI POWERLINE

up to 1615lm

up to 107lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm
FOR FILORAIL DALI POWERLINE

up to 1680lm

up to 110lm/W

M | F

Casambi



**PALCO LOW VOLTAGE
Ø51 / 62 / 86 mm
FOR FILORAIL CASAMBI**

up to 2613lm
up to 102lm/W
S | M | F | WF



**PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR FILORAIL CASAMBI**

up to 1373lm
up to 61lm/W
WW



**SIPARIO LOW VOLTAGE
Ø56 / 73 / 86 mm
FOR FILORAIL CASAMBI**

up to 650lm
up to 60lm/W
M | F | WF

Opti Beam Lens



**ROBIN Ø37 / 51 / 62 mm
FOR FILORAIL CASAMBI**

up to 2415lm
up to 98lm/W
S | M | F | WF



**ROBIN WALL WASHER Ø51 mm
FOR FILORAIL CASAMBI**

up to 328lm
up to 18lm/W
WW



**NEWFO Ø88 / 116 mm
FOR FILORAIL CASAMBI**

up to 2519lm
up to 114lm/W
M | F | WF



**NEWFO PENDANT Ø88 / 116 mm
FOR FILORAIL CASAMBI**

up to 2519lm
up to 114lm/W
F | WF



**LE PERROQUET Ø55 / 80 mm
FOR FILORAIL CASAMBI**

up to 1436lm
up to 97lm/W
S | M | F | WF



**LE PERROQUET Ø55 / 80 mm
FOR FILORAIL CASAMBI**

up to 1436lm
up to 97lm/W
S | M | F | WF



**LIBERA STAND-ALONE PENDANT
FOR FILORAIL CASAMBI**

up to 4017lm
up to 150lm/W
M | F



**LASER BLADE XS HIGH CONTRAST
5 - 10 CELLS
FOR FILORAIL CASAMBI**


up to 1839lm
up to 100lm/W
F



**LASER BLADE XS GENERAL
LIGHTING PRO 5 - 10 CELLS
FOR FILORAIL CASAMBI**

up to 1664lm
up to 90lm/W
GL-PRO

Casambi



**LASER BLADE XS WALL WASHER
LGC 5 - 10 CELLS FOR FILORAIL
CASAMBI**

up to 648lm

up to 35lm/W

WW-LGC



**LASER BLADE XS HIGH CONTRAST
PENDANT 1 - 4 - 9 CELLS
FOR FILORAIL CASAMBI**

up to 1700lm

up to 98lm/W

M | F



**LASER PENDANT Ø59 / 75 mm
FOR FILORAIL CASAMBI**

up to 1615lm

up to 107lm/W

M | F



**LASER EVO PENDANT Ø59 / 75 mm
FOR FILORAIL CASAMBI**

up to 1680lm

up to 110lm/W

M | F

Smart accessories for Filorail



Casambi
lux/motion multi-sensor

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast

Finishes



01
White



04
Black



reddot winner 2025
best of the best



Other awards
Light Middle East Award: Indoor Lighting
Product of the Year 2025
Grand Prix du Design 2025



Visit our website
for more information
Sipario for Filorail
available from
April 2026



Venice Venice Hotel - Venice, Italy — Product: Superrail - Pendant | Palco low Voltage | Black
Ph: Alessandra Chemollo



CEILING/PENDANT

DALI Powerline | Casambi



PENDANT UP/DOWN

DALI Powerline | Casambi



RECESSED FRAME

DALI Powerline | Casambi



RECESSED MINIMAL

DALI Powerline | Casambi

DALI Powerline



PALCO LOW VOLTAGE
 Ø19 / 37 / 51 / 62 / 86 mm
FOR SUPERRAIL DALI POWERLINE
 up to 2496lm
 up to 94lm/W
 S | M | F | WF



PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR SUPERRAIL DALI POWERLINE
 up to 1373lm
 up to 51lm/W
 WW



PALCO LOW VOLTAGE FRAMER
 Ø19 / 37 mm
FOR SUPERRAIL DALI POWERLINE
 up to 38lm
 Framer
 12°



PALCO LOW VOLTAGE BEAMER
 Ø19 mm
FOR SUPERRAIL DALI POWERLINE
 up to 28lm
 Beamer
 10°-65°



SIPARIO LOW VOLTAGE
 Ø22 / 40 / 56 / 73 / 86 mm
FOR SUPERRAIL DALI POWERLINE
 up to 2376lm
 up to 117lm/W
 M | F | WF
 Opti Beam Lens



SIPARIO FRAMER LOW VOLTAGE
 Ø22 / 40 mm
FOR SUPERRAIL DALI POWERLINE
 up to 40lm
 beamer



SIPARIO BEAMER LOW VOLTAGE
 Ø22 / 40 / 86 mm
FOR SUPERRAIL DALI POWERLINE
 up to 1456lm
 up to 80lm/W
 beamer



ROBIN Ø37 / 51 / 62 mm
FOR SUPERRAIL DALI POWERLINE
 up to 2407lm
 up to 94lm/W
 S | M | F | WF



ROBIN WALL WASHER Ø51 mm
FOR SUPERRAIL DALI POWERLINE
 up to 322lm
 up to 18lm/W
 WW



ROBIN UP-LIGHT
 Ø37 / 51 / 62 mm
FOR SUPERRAIL DALI POWERLINE
 up to 2407lm
 up to 94lm/W
 S | M | F | WF



ROBIN WALL WASHER UP-LIGHT
 Ø51 mm
FOR SUPERRAIL DALI POWERLINE
 up to 322lm
 up to 18lm/W
 WW



NEWFO Ø62 / Ø88 / 116 mm
FOR SUPERRAIL DALI POWERLINE
 up to 2520lm
 up to 113lm/W
 S | M | F | WF
 Class III

TOOLS

DALI Powerline



NEWFO PENDANT Ø88 / 116 mm FOR SUPERRAIL DALI POWERLINE

up to 2520lm

up to 113lm/W

F | WF

Class III

DALI Powerline | Casambi



LASER BLADE XS HIGH CONTRAST 1 - 2 CELLS FOR SUPERRAIL DALI POWERLINE

up to 160lm

up to 64lm/W

F



LASER BLADE XS HIGH CONTRAST 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 1887lm

up to 95lm/W

F



LASER BLADE XS GENERAL LIGHTING PRO 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 1552lm

up to 70lm/W

GL-PRO



LASER BLADE XS WALL WASHER 5 - 10 CELLS FOR SUPERRAIL DALI POWERLINE

up to 640lm

up to 34lm/W

WW



LASER BLADE HIGH XS CONTRAST PENDANT 1 - 4 - 9 CELLS FOR FOR SUPERRAIL DALI POWERLINE

up to 1150lm

up to 67lm/W

F | WF




SUPERRAIL SPACE FOR SUPERRAIL DALI POWERLINE

up to 3646lm

up to 144lm/W

GL | UGR<19



LED STICK FOR SUPERRAIL DALI POWERLINE

up to 1848lm

up to 74lm/W

GL



UP-LIGHT LED STRIP FOR SUPERRAIL DALI POWERLINE

up to 1978lm

up to 136lm/W

GL



LASER PENDANT Ø59 / 75 mm FOR SUPERRAIL DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F



LASER EVO PENDANT Ø59 / 75 mm FOR SUPERRAIL DALI POWERLINE

up to 1615lm

up to 106lm/W

M | F

TOOLS

Casambi



**PALCO LOW VOLTAGE
Ø19 / 37 / 51 / 62 / 86 mm
FOR SUPERRAIL CASAMBI**

up to 2496lm
up to 94lm/W
S | M | F | WF



**PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR SUPERRAIL CASAMBI**

up to 1373lm
up to 51lm/W
WW



**PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm
FOR SUPERRAIL CASAMBI**

up to 38lm
Framer
12°



**PALCO LOW VOLTAGE BEAMER
Ø19 mm
FOR SUPERRAIL CASAMBI**

up to 28lm
Beamer
10°-65°



**SIPARIO LOW VOLTAGE
Ø22 / 40 / 56 / 73 / 86 mm
FOR SUPERRAIL CASAMBI**

up to 2376lm
up to 117lm/W
M | F | WF
Opti Beam Lens



**SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR SUPERRAIL CASAMBI**

up to 40lm
beamer



**SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 / 86 mm
FOR SUPERRAIL CASAMBI**

up to 1456lm
up to 80lm/W
beamer



**ROBIN Ø37 / 51 / 62 mm
FOR SUPERRAIL CASAMBI**

up to 2407lm
up to 94lm/W
S | M | F | WF



**ROBIN WALL WASHER Ø51 mm
FOR SUPERRAIL CASAMBI**

up to 322lm
up to 18lm/W
WW



**ROBIN UP-LIGHT
Ø37 / 51 / 62 mm
FOR SUPERRAIL CASAMBI**

up to 2407lm
up to 94lm/W
S | M | F | WF



**ROBIN WALL WASHER UP-LIGHT
Ø51 mm
FOR SUPERRAIL CASAMBI**

up to 322lm
up to 18lm/W
WW



**NEWFO Ø62 / Ø88 / 116 mm
FOR SUPERRAIL CASAMBI**

up to 2520lm
up to 113lm/W
S | M | F | WF
Class III

TOOLS

Casambi



**NEWFO PENDANT Ø88 / 116 mm
FOR SUPERRAIL CASAMBI**

up to 2520lm

up to 113lm/W

F | WF

Class III



**LASER BLADE XS HIGH CONTRAST
1 - 2 CELLS
FOR SUPERRAIL CASAMBI**

up to 160lm

up to 64lm/W

F




**LASER BLADE XS HIGH CONTRAST
5 - 10 CELLS
FOR SUPERRAIL CASAMBI**

up to 1887lm

up to 95lm/W

F



**LASER BLADE XS GENERAL
LIGHTING PRO 5 - 10 CELLS
FOR SUPERRAIL CASAMBI**

up to 1552lm

up to 70lm/W

GL-PRO



**LASER BLADE XS WALL WASHER
5 - 10 CELLS
FOR SUPERRAIL CASAMBI**

up to 640lm

up to 34lm/W

WW



**LASER BLADE HIGH XS CONTRAST
PENDANT 1 - 4 - 9 CELLS FOR
FOR SUPERRAIL CASAMBI**

up to 1150lm

up to 67lm/W

F | WF




**SUPERRAIL SPACE
FOR SUPERRAIL CASAMBI**

up to 3646lm

up to 144lm/W

GL | UGR<19



**LED STICK
FOR SUPERRAIL CASAMBI**

up to 1848lm

up to 74lm/W

GL



**UP-LIGHT LED STRIP
FOR SUPERRAIL CASAMBI**

up to 1978lm

up to 136lm/W

GL



**LASER PENDANT Ø59 / 75 mm
FOR SUPERRAIL CASAMBI**

up to 1615lm

up to 106lm/W

M | F



**LASER EVO PENDANT Ø59 / 75 mm
FOR SUPERRAIL CASAMBI**

up to 1615lm

up to 106lm/W

M | F

Smart accessories for Superrail



Casambi
lux/motion
multi-sensor



Luminaire
adapter



Pink Villa Design Studio - Stockholm, Sweden — Product: Superrail - Palco Low Voltage | Ø37 mm | Black
Ph: Max Rommel, courtesy of Nichetto Studio

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast

Finishes



01
White



04
Black



Visit our website
for more information

LOW VOLTAGE TRACK

design iGuzzini




Wilmoth & Associates Architects offices - Milan, Italy — Product: Low voltage track - Palco Low Voltage | Ø37 mm | Black
Ph: Stefano Anzini



**LOW VOLTAGE TRACK
CEILING/PENDANT**

DALI Powerline | Casambi

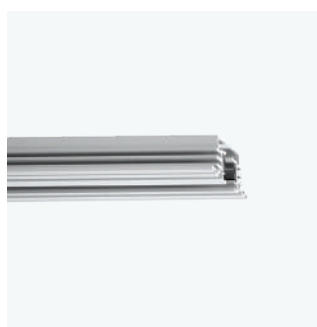

LOW VOLTAGE TRACK RECESSED

DALI Powerline | Casambi

TOOLS

Dali Powerline



**PALCO LOW VOLTAGE
Ø19 / 37 / 51 / 62 / 86 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 2496lm

up to 94lm/W

S | M | F | WF




**PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 1373lm

up to 51lm/W

WW

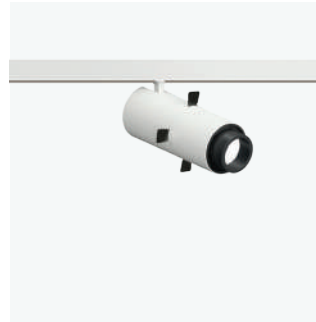


**PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm FOR LOW VOLTAGE
TRACK DALI POWERLINE**

up to 38lm

Framer

12°

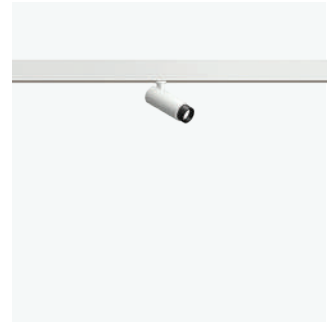

**PALCO LOW VOLTAGE BEAMER
Ø19 mm FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 28lm

Beamer

10°-65°



**PALCO LOW VOLTAGE Ø19 / 37 mm
WITH ROD FOR LOW VOLTAGE
TRACK DALI POWERLINE**

up to 578lm

up to 60lm/W

M | WF




**SIPARIO LOW VOLTAGE
Ø22 / 40/ 56 / 73 / 86 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 2376lm

up to 117lm/W

M | F | WF

Opti Beam Lens

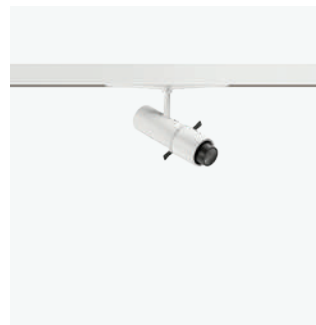

**SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 40lm

beamer



**SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 / 86 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 1456lm

up to 80lm/W

beamer



**SIPARIO LOW VOLTAGE
Ø22 / 40 mm WITH ROD
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



**ROBIN Ø37 / 51 / 62 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 2407lm

up to 94lm/W

S | M | F | WF



**ROBIN WALL WASHER Ø51 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 322lm

up to 18lm/W

WW



**NEWFO Ø62 / Ø88 / 116 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 2520lm

up to 113lm/W

S | M | F | WF

Class III

TOOLS

Dali Powerline



**NEWFO PENDANT Ø88 / 116 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 2520lm

up to 113lm/W

F | WF

Class III



**LASER BLADE HIGH CONTRAST
1 - 2 CELLS FOR LOW VOLTAGE
TRACK DALI POWERLINE**

up to 160lm

up to 64lm/W

F



**LASER BLADE HIGH CONTRAST
5 - 10 CELLS FOR LOW VOLTAGE
TRACK DALI POWERLINE**

up to 2033lm

up to 93lm/W

F



**GENERAL LIGHTING PRO 5X/10X
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 1690lm

up to 77lm/W

GL-PRO



**LASER BLADE WALL WASHER 10
CELL FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 836lm

up to 45lm/W

WW



**LASER BLADE HIGH CONTRAST
PENDANT 1 - 4 - 9 CELLS FOR LOW
VOLTAGE TRACK DALI POWERLINE**

up to 1150lm

up to 67lm/W

F | WF



**LASER PENDANT Ø59 / 75 mm
FOR LOW VOLTAGE TRACK DALI
POWERLINE**

up to 1615lm

up to 106lm/W

M | F



**LASER EVO PENDANT Ø59 / 75 mm
FOR LOW VOLTAGE TRACK
DALI POWERLINE**

up to 1615lm

up to 106lm/W

M | F

Smart accessories for low voltage track



Casambi
lux/motion
multi-sensor

TOOLS

Casambi



**PALCO LOW VOLTAGE
Ø19 / 37 / 51 / 62 / 86 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 2496lm

up to 94lm/W

S | M | F | WF




**PALCO LOW VOLTAGE
WALL WASHER Ø51 / 86 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 1373lm

up to 51lm/W

WW

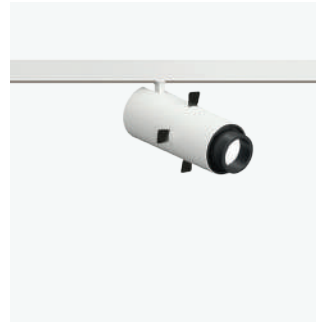


**PALCO LOW VOLTAGE FRAMER
Ø19 / 37 mm FOR LOW VOLTAGE
TRACK CASAMBI**

up to 38lm

Framer

12°

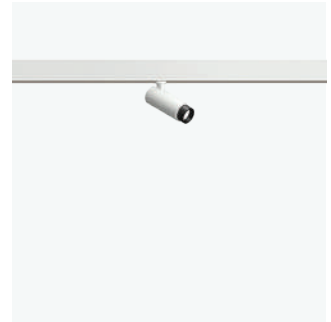

**PALCO LOW VOLTAGE BEAMER
Ø19 mm FOR LOW VOLTAGE TRACK
CASAMBI**

up to 28lm

Beamer

10°-65°



**PALCO LOW VOLTAGE Ø19 / 37 mm
WITH ROD FOR LOW VOLTAGE
TRACK CASAMBI**

up to 578lm

up to 60lm/W

M | WF




**SIPARIO LOW VOLTAGE
Ø22 / 40 / 56 / 73 / 86 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 2376lm

up to 117lm/W

M | F | WF

Opti Beam Lens

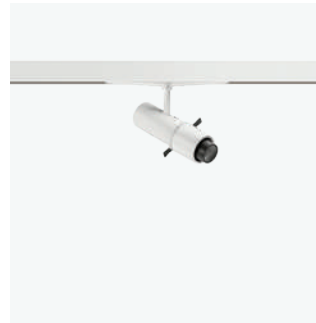

**SIPARIO FRAMER LOW VOLTAGE
Ø22 / 40 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 40lm

beamer



**SIPARIO BEAMER LOW VOLTAGE
Ø22 / 40 / 86 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 1456lm

up to 80lm/W

beamer



**SIPARIO LOW VOLTAGE
Ø22 / 40 mm WITH ROD
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 650lm

up to 60lm/W

S | M | WF | O

Opti Beam Lens



**ROBIN Ø37 / 51 / 62 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 2407lm

up to 94lm/W

S | M | F | WF



**ROBIN WALL WASHER Ø51 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 322lm

up to 18lm/W

WW



**NEWFO Ø62 / 88 / 116 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 2520lm

up to 113lm/W

S | M | F | WF

Class III

LOW VOLTAGE TRACK

TOOLS

Casambi



**NEWFO PENDANT Ø88 / 116 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 2520lm

up to 113lm/W

F | WF

Class III



**LASER BLADE HIGH CONTRAST
1 - 2 CELLS FOR LOW VOLTAGE
TRACK CASAMBI**

up to 160lm

up to 64lm/W

F



**LASER BLADE HIGH CONTRAST
5 - 10 CELLS FOR LOW VOLTAGE
TRACK CASAMBI**

up to 2033lm

up to 93lm/W

F



**GENERAL LIGHTING PRO 5X/10X
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 1690lm

up to 77lm/W

GL-PRO



**LASER BLADE WALL WASHER 10
CELL FOR LOW VOLTAGE TRACK
CASAMBI**

up to 836lm

up to 45lm/W

WW



**LASER BLADE HIGH CONTRAST
PENDANT 1 - 4 - 9 CELLS FOR LOW
VOLTAGE TRACK CASAMBI**

up to 1150lm

up to 67lm/W

F | WF



**LASER PENDANT Ø59 / 75 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 1615lm

up to 106lm/W

M | F



**LASER EVO PENDANT Ø59 / 75 mm
FOR LOW VOLTAGE TRACK
CASAMBI**

up to 1615lm


up to 106lm/W

M | F

Smart accessories for low voltage track



Casambi
lux/motion
multi-sensor

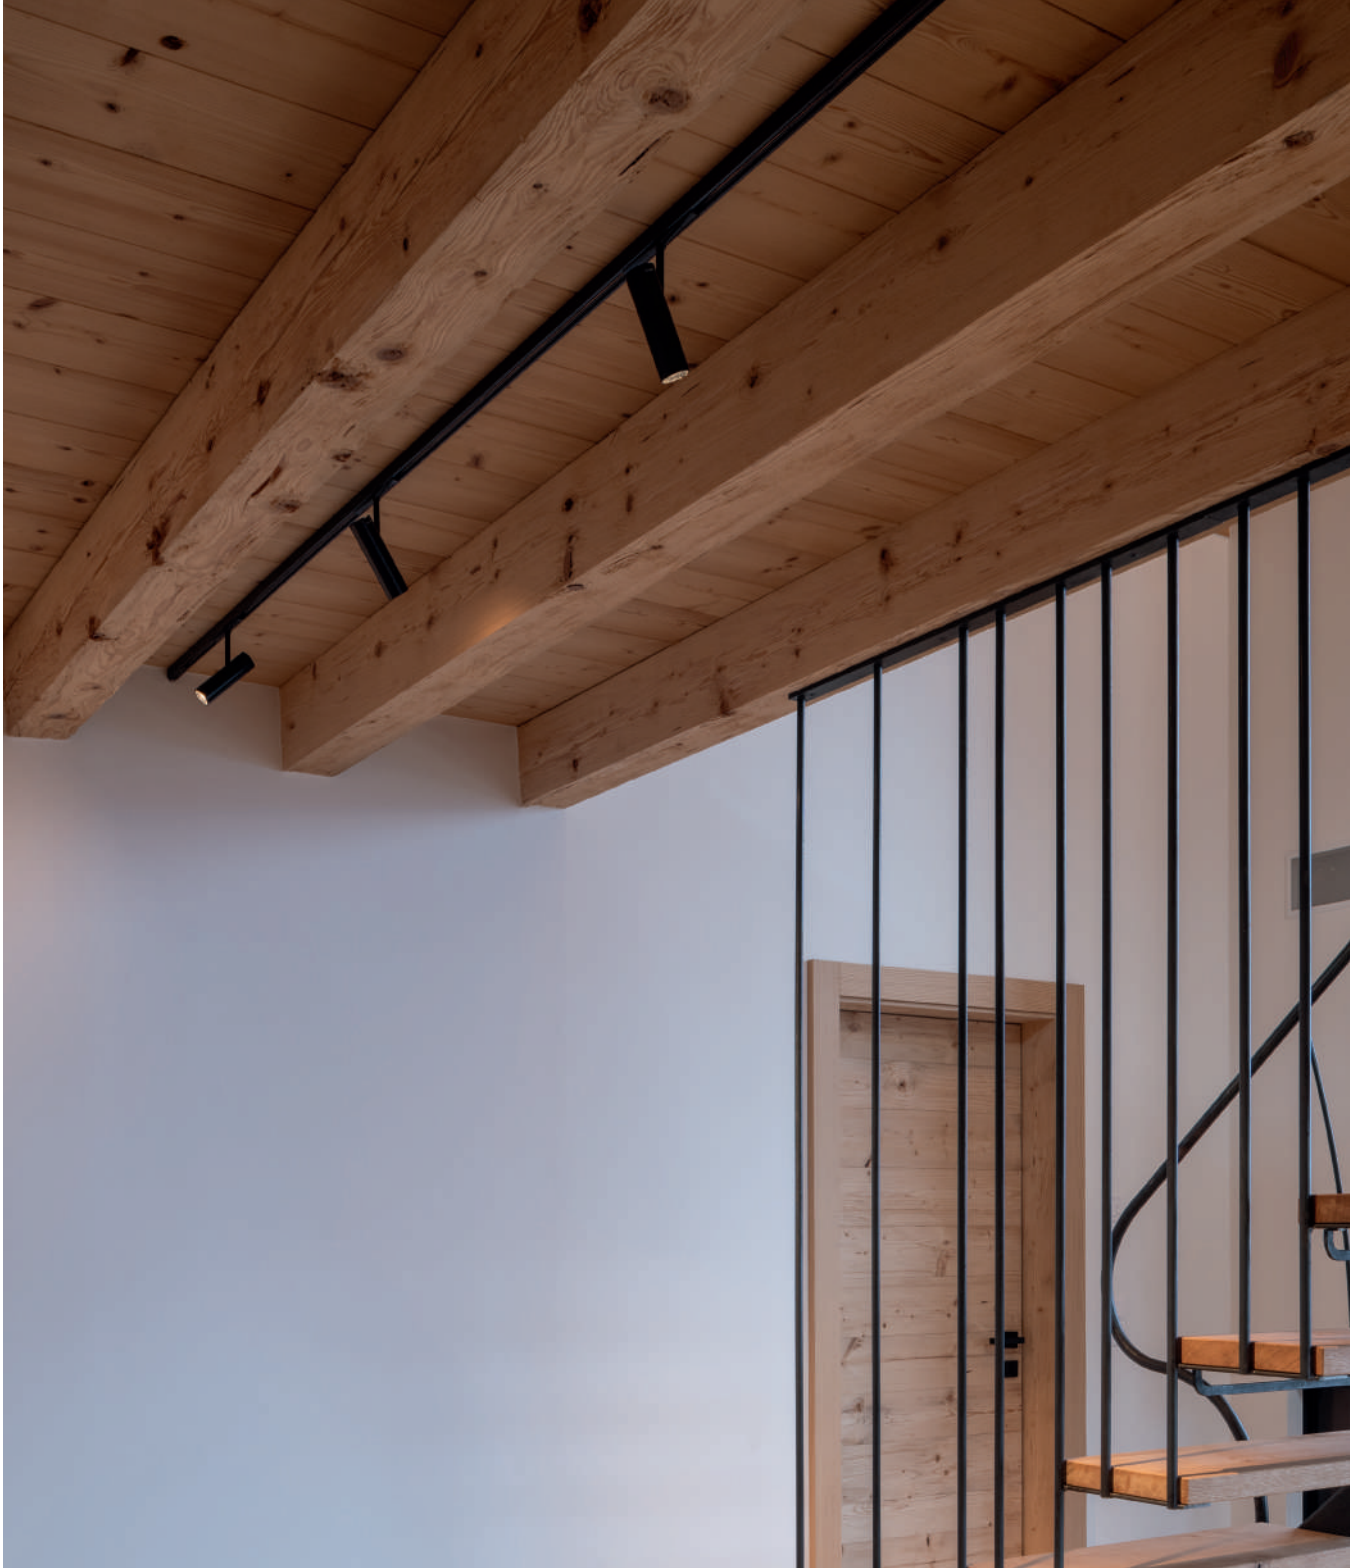

Chalet Clivia – Ollon, Switzerland — Product: Low voltage track | Robin Ø37 | Black
Ph: Paolo Carlini

2700K | 3000K | 3500K | 4000K

Casambi

DALI Powerline | DALI Broadcast



Finishes

01
White

04
Black



Visit our website
for more information



PENDANTS



128 | LIBERA



130 | LIGHT SHED 14



132 | LIGHT SHED 60



134 | IN30 EVO



135 | IN45



137 | IN60 EVO




140 | IN30



142 | ISIGN




144 | LINEALUCE 27




146 | BETWO




148 | EASY




150 | LE PERROQUET




152 | NEWFO



154 | TECNICA EVO



155 | TACK




156 | LASER



158 | LASER BLADE XS



160 | ISOLA



162 | IPLAN



164 | IPLAN ACCESS




165 | IPLAN NEXT



166 | DROP BY DROP



168 | CLAN



169 | ZURIGO



Private office - Bologna, Italy — Product: Libera - 2700 mm | UGR<19 | Black/WhiteTransparent
Ph: Michele Nastasi



SYSTEM - PENDANT

600 | 900 | 1200 | 1800
| 2300 | 2700 mm

up to 5287lm

up to 128lm/W

GL | UGR<19



STAND-ALONE PENDANT

1400 | 1800 mm

with sensor 1900 mm

up to 5222lm

up to 135lm/W

GL | UGR<19



STAND-ALONE PENDANT FOR FILORAIL

1200 | 1400 | 1800 mm

up to 4017lm

up to 145lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 198



Libera System
- wall



Libera
stand-alone wall
mounted



Libera System
- ceiling to floor



Libera
stand-alone floor



Libera
stand-alone
ceiling to floor



Libera
stand-alone
pendant for
Filorail

Table and floor lamps p. 266

Fixtures for low voltage track p. 106

Linear systems p. 182




Libera System
- pendant



Libera System
- Space lighting
modules



Libera System
- General Li-
ghting modules



Libera System
- General Li-
ghting modules
without screen



Libera System
- Led strip for Up
light



Libera System
- mounting and
power supply
accessories

Smart accessories for Libera



Organic
Response



Quick BLE
(Casambi)



DALI-2

2700K | 3000K | 3500K | 4000K

CRI90

6 lengths

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)

Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor

IP20

Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01
White



04
Black



N8
Titanium



N9
Sapphire

Optical finishes



R4
White Transparent



83
Black Transparent



B9
Smoked



P2
Microtextured



reddot winner 2024
best of the best



Other awards

BrightStar Award 2024

Grand Prix du Design (Gold and Platinum) 2024

Production Innovation Award 2024

Good Design 2024



Visit our website
for more information

LIGHT SHED 14

design iGuzzini



Park Associati Studio - Milan, Italy — Product: Light shed 14 - 1195×140×48 mm | UGR<19 | White/Transparent white
Ph: Paolo Carlini



PENDANT

1200 | 1600 | 2400 | 3200 mm

up to 14760lm

up to 161lm/W


UGR<19

Opti Diamond

Other versions available

Fixtures for main voltage track p. 74

Ceiling luminaires p. 247



Light Shed 14
Fixture for mains
voltage track



Light Shed 14
ceiling mounted

Smart accessories for Light Shed 14



Organic
Response



Quick BLE
(Casambi)



DALI-2

3000K | 4000K

CRI80 | CRI90

IP20

4 lengths

Opti Diamond - UGR<19

Emergency

Class I

Up & Down | Down emission

Organic Response (control + sensor)

Casambi

DALI-2 | DALI-2 sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01
White



04
Black

Optical finishes



R4
White Transparent



83
Black Transparent



Visit our website
for more information

LIGHT SHED 60

design iGuzzini



Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy — Product: Light Shed 60
Ph: Studio Buschi





60 PENDANT

600×600 mm
 3000K | 4000K | Tunable White
 up to 3976lm
 up to 139lm/W
 UGR<19



dB PENDANT

600×600 mm
 3000K | 4000K | Tunable White
 up to 3274lm
 up to 115lm/W
 UGR<19



60 LINEN PENDANT

600×600 mm
 3000K | 4000K | Tunable White
 up to 3496lm
 up to 123lm/W
 UGR<19


Other versions available

Downlights and recessed luminaires
 p. 34



Light Shed 60
 recessed

Smart accessories for Light Shed 60



Cover with
 bracket for
 external / semi-
 recessed camera



Cover with
 bracket for
 recessed camera



Cover with
 multi-sensor lux
 and movement

3000K | 4000K | Tunable White
 (2700K ÷ 6500K)

CRI80 | CRI90

IP20 | IP43

1 size

MPO (Micro Prismatic Optic)

Class II

Casambi

DALI-2 | DALI-2 Sensor

ON/OFF Emergency

Adapter for camera

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)







Quick DALI

Master Pro Evo

Smart services:

Space management |
 Push notification

Finishes

-  01 White
-  15 Grey
-  07 Green
-  E8 Gold-satin
-  S0 Ecru
-  16 Blue



Other awards:
 Gold Certificate a "Les Grands Prix du Design" 2022
 IES Progress Report 2023




Visit our website
 for more information




SYSTEM OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90



SYSTEM HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90




SYSTEM WALL WASHER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1250lm/m
 up to 85lm/W
 WW
 Frame | Minimal
 CRI80 | CRI90



STAND-ALONE OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90




STAND-ALONE HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90

Other versions available

Ceiling luminaires p. 250 / Linear systems p. 177



Evo System Opal



Evo System High Contrast



Evo System Wall Washer

2700K | 3000K | 3500K | 4000K
 CRI80 | CRI90
 IP20
 Frame | Minimal
 GL | UGR <10 | WW
 Class I
 Down | Up & Down emission
 DALI-2 | CASAMBI | EMERGENCY (Integral)


Intelligent Light Solutions

Smart controls:
 Organic Response | Quick BLE
 (Casambi) | Quick DALI | Master Pro
 Evo

Smart services:

Space management | Push notification

Finishes



Visit our website for more information
 IN30 EVO available from September 2026



SYSTEM OPAL SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2300 lm/m (UGR <24)
 Up to 1400 lm/m (UGR <22)
 Up to 140 lm/W
 GL
 Frame
 CRI90



SYSTEM OFFICE SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 1050 lm/m
 Up to 120 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM SYSTEM RASTER

600 | 1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 Up to 3300 lm/m
 Up to 150 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM WALL WASHER

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2000 lm/m
 Up to 110 lm/W
 WW
 Frame
 CRI90



SYSTEM MAINS VOLTAGE TRACK

1200 | 2400 mm
 MV track inside the product



STAND-ALONE OPAL SCREEN

1200 | 2400 mm
 3000K | 4000K
 Up to 2300 lm/m (UGR <24)
 Up to 1400 lm/m (UGR <22)
 Up to 140 lm/W
 GL
 CRI90



STAND-ALONE OFFICE SCREEN

1200 | 2400 mm
 3000K | 4000K
 Up to 1050 lm/m
 Up to 120 lm/W
 UGR <19
 CRI90



STAND-ALONE RASTER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 Up to 3300 lm/m
 Up to 150 lm/W
 UGR <19
 CRI90

Other versions available

Ceiling luminaires p. 248



System Opal Screen



System Raster



System Office Screen



System Wall Washer



System Mains Voltage Track

Pendants p. 135



System
Opal Screen



System
Raster



System
Office Screen



System
Wall Washer



System
Mains Voltage
Track



Stand-Alone
Opal Screen



Stand-Alone
Raster



Stand-Alone
Wall Washer

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



O1
White



V0
Matte black



Visit our website
for more information
IN45 available from
October 2026

IN60 EVO

design iGuzzini




Bros Manifatture headquarters - Montegiorgio, Italy — Product: iN60 Evo - 2400 mm | MMO | UGR<19 | White/Aluminium
Ph: Studio Buschi



SYSTEM SPACE

White Transparent | Black Transparent
 1200 | 2400 mm
 LED Module
 3000K | 3500K | 4000K |
 Tunable White
 up to 6059lm/m
 up to 169lm/W
 GL | UGR<19
 Up & Down adjustable emission



SYSTEM MMO

Metalized Modular Optic
 1200 | 2400 mm
 LED Module
 3000K | 3500K | 4000K |
 Tunable White
 up to 5696lm/m
 up to 154lm/W
 UGR<19



SYSTEM MPO

Micro Prismatic Optic
 600 | 900 | 1200 | 3600 mm
 LED Module - Roll Screen
 3000K | 3500K | 4000K
 up to 1596lm/m
 up to 141lm/W
 UGR<19
 Angular luminous module



SYSTEM OPAL

600 | 900 | 1200 | 3600 mm
 LED Module - Roll Screen
 3000K | 3500K | 4000K
 up to 4898lm/m
 up to 147lm/W
 GL
 Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm
 LED Module
 3000K | 3500K | 4000K
 up to 1970lm
 up to 104lm/W
 WW



STAND-ALONE SPACE

1200 | 2400 mm
 with sensor - 1300 | 2500 | 2600 mm
 3000K | 3500K | 4000K
 up to 14546lm
 up to 168lm/W
 GL | UGR<19



STAND-ALONE MMO

1200 | 2400 mm
 with sensor - 1300 | 2500 | 2600 mm
 3000K | 3500K | 4000K
 up to 13763lm
 up to 154lm/W
 UGR<19



STAND-ALONE MPO

1200 | 2400 mm
 3000K | 3500K | 4000K
 up to 3830lm
 up to 141lm/W
 UGR<19



STAND-ALONE OPAL

1200 | 2400 mm
 3000K | 3500K | 4000K
 up to 11752lm
 up to 147lm/W
 GL

Other versions available

Fixtures for mains voltage track p. 76



iN60 Evo System
Space



iN60 Evo System
MMO



iN60 Evo System
MPO



iN60 Evo System
Opal

Linear system p. 180



iN60 Evo System
Opal



iN60 Evo System
MPO



iN60 Evo System
MMO



iN60 Evo System
Space




iN60 Evo System
Wall Washer

Smart accessories for iN60 Evo



Organic
Response



Quick BLE
(Casambi)



DALI-2



Li-Fi

3000K | 3500K | 4000K |
Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19

Up & Down | Down emission |
Up & Down independent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor |
Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White



04
Black



12
Aluminium



Visit our website
for more information



Innolving offices - Ancona, Italy — Product: iN30 - High contrast | UGR<10 | module 2×10 cells | 1462×32×75 mm | White
Ph: Studio Buschi



PENDANT LOW CONTRAST

1200 | 2400 | 600x600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL



PENDANT HIGH CONTRAST

1200 mm (2x5 cells) | 1400 mm (2x10 cells)

3000K | 4000K

up to 4131lm

up to 90lm/W

WF

Other versions available

Ceiling luminaires p. 252



iN30 ceiling low contrast



iN30 ceiling high contrast



iN30 recessed low contrast



iN30 recessed high contrast

Downlights and recessed luminaires p. 38

Linear system p. 174



iN30 ceiling low contrast



iN30 ceiling high contrast



iN30 pendant low contrast



iN30 pendant high contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Fixed

Frame

Class I

DALI-2

Finishes



01 White



04 Black



12 Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website for more information



Xeito offices - Madrid, Spain — Product: iSign - Ø80 mm | Clear transparent
Ph: Javier de Paz García



PENDANT

Ø80 mm


3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Wall luminaires p. 214



iSign

3000K | 4000K

CRI80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2 | Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Finish

24
Clear transparent



Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



Product: Linealuce 27 - Pendant Full Remote | Flood | Rust brown



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CR180

Other versions available

Ceiling luminaires p. 254



Linealuce 27
surface Full
remote

Floor recessed luminaires



Linealuce 27
recessed Full
Remote

Linear systems p. 186



Linealuce 27
recessed Full
Remote



Linealuce 27
surface Full
remote

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push notification

Finishes



01
White

04
Black

15
Grey

F5
Rust brown



reddot winner 2023
best of the best

Other awards:
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information



Product: Betwo - Down light | general lighting | Ø114 mm | White-champagne/White-transparent
Ph: Paolo Carlini



PENDANT GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

up to 8352lm

up to 123lm/W

GL

Up & Down | Down emission



PENDANT UGR<19


Ø172 | Ø234 mm

up to 5188lm

up to 125lm/W

UGR<19

Up & Down | Down emission

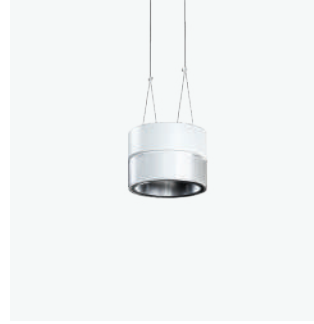

PURE PENDANT GENERAL LI-GHTING

Ø114 | Ø172 | Ø234 mm

up to 8352lm

up to 123lm/W

GL

Up & Down | Down emission



PURE PENDANT UGR<19

Ø172 | Ø234 mm

up to 5188lm

up to 125lm/W

UGR<19

Up & Down | Down emission

Other versions available

Fixtures for mains voltage track p. 70

Ceiling luminaires p. 228



BeTwo



Be Two Pure



BeTwo Ceiling



BeTwo Pure Ceiling

3000K | 3500K | 4000K

CRI90

IP40

3 sizes

Up & Down | Down emission

Opti Diamond

Class I

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Optical finish

D8
White



Body finishes

G0
White/White



G2
Black/Black



I1
White/Champagne



I3
Black/Champagne



R4
White/Transparent



R5
Black/Transparent



R6
Champagne/Transparent



Optical finish

D8
Black



Body finishes

G1
White/White



I2
Black/Black



I4
White/Champagne



M6
Black/Champagne



R7
White/Transparent



R8
Black/Transparent



R9
Champagne/Transparent



Visit our website
for more information



“Rosalía de Castro” library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Easy - Pendant | UGR<19 | Ø172×180 mm | White/Aluminium
Ph: Luis Díaz Díaz



PENDANT GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

3000K | 3500K | 4000K

up to 4725lm

up to 131lm/W

GL

Frame

Fixed

PENDANT UGR<19

Ø172 | Ø234 mm

3000K | 3500K | 4000K

up to 4410lm

up to 136lm/W

UGR<19

Frame

Fixed

Other versions available

Downlights and recessed luminaires
p. 20



Easy

Ceiling luminaires p. 232



Easy ceiling

3000K | 4000K

CRI80 | CRI90

IP20 | IP40 | IP54

3 sizes

Class I

DALI-2

ON/OFF Emergency

Body finishes



01
White



04
Black

Optical finishes



01
White



12
Aluminium



39
White/Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information

LE PERROQUET

design Piano Design



Monterosa 91 - Milan, Italy — Product: Le Perroquet - Ø156 mm | Grey
Ph: Michele Nastasi



PENDANT Ø89 mm

3000K

up to 1768lm

up to 79lm/W

M | F | WF



PENDANT Ø156 mm

3000K

up to 3665lm

up to 97lm/W

S | F | WF



PENDANT Ø162 mm

3000K

up to 4305lm

up to 99lm/W

M | F | WF



PENDANT Ø55 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF



PENDANT Ø80 mm FOR FILORAIL

2700K | 3000K | 3500K | 4000K

up to 1434lm

up to 99lm/W

S | M | WF

Other versions available

Fixtures for low voltage track p. 98

Ceiling luminaires p. 242

Wall luminaires p. 208



Le Perroquet for Filorail



Le Perroquet pendant for Filorail



Le Perroquet wall/ceiling



Le Perroquet surface pendant



Le Perroquet surface



Le Perroquet recessed pendant



Le Perroquet wall/ceiling

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP40

5 sizes

OptiBeam Reflector | OptiBeam Lens

Class I, III

Casambi

DALI-2 | DALI Powerline

Rotation 360° | Tilting 90°

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01 White



74 Gray/Black



Visit our website for more information



**Ø88 mm
FOR MAINS VOLTAGE TRACK**

up to 1818lm

up to 101lm/W

S | M | F | WF

Class II

DALI-2 | Casambi



**Ø116 mm
FOR MAINS VOLTAGE TRACK**


up to 2519lm

up to 105lm/W

M | F | WF

Class II

DALI-2 | Casambi

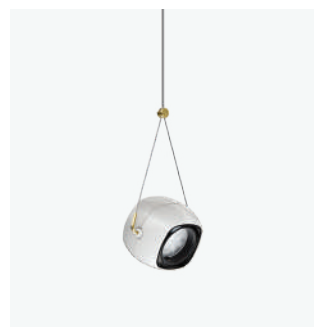

**PENDING Ø88 mm
FOR MAINS VOLTAGE TRACK**

up to 1818lm

up to 101lm/W

M | F | WF

Class II

DALI-2 | Casambi



**PENDING Ø116 mm
FOR MAINS VOLTAGE TRACK**

up to 2519lm

up to 105lm/W

F | WF

Class II

DALI-2 | Casambi




**LOW VOLTAGE PENDANT
Ø88 mm FOR LOW VOLTAGE TRACK**

up to 1818lm
up to 108lm/W
F | WF
Class III
DALI Powerline | Casambi



**LOW VOLTAGE PENDANT
Ø116 mm FOR LOW VOLTAGE TRACK**

up to 1818lm
up to 108lm/W
F | WF
Class III
DALI Powerline | Casambi

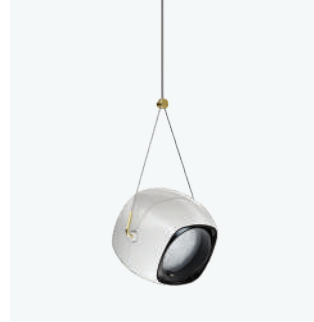

**LOW VOLTAGE PENDANT
Ø88 mm FOR SUPERRAIL**

up to 2519lm
up to 114lm/W
F | WF
Class III
DALI Powerline | Casambi

Other versions available


Fixtures for mains voltage track p. 60

Other versions available

Fixtures for low voltage track p. 94



Newfo



Newfo pendant



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage



Newfo Low Voltage pendant



Newfo Low Voltage for Superrail




Newfo Low Voltage pendant for Superrail

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

2 sizes

Rotation 360° | Tilting 90°

Optibeam Reflector | Optibeam Lens | Optibeam Refractor

Class II, III

Casambi

DALI-2 | DALI Powerline

ON/OFF

Smart Accessory for MV Track

Organic Response (control + sensor)

Casambi Sensor

Casambi - DALI interface

Master Pro Evo

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



Optical finishes



Visit our website for more information



TECNICA Ø92 mm PENDANT

3000K | 4000K

up to 3506lm

up to 126lm/W

M | F | WF



TECNICA Ø117 mm PENDANT

3000K | 4000K

up to 5263lm

up to 137lm/W

M | F | WF | VWF



TECNICA Ø117 mm FOOD PENDANT

2700K | 3000K | 6500K


up to 3849lm

up to 101lm/W

F

Other versions available

Downlights and recessed luminaires
p. 32



Tecnica Evo
recessed

Fixtures for mains voltage track p. 68



Tecnica Evo



Tecnica Evo
pendant

2700K | 3000K | 4000K | 6500K

CRI80 | CRI90

IP20

2 sizes

Rotation 360° | Tilting 90°

Reflector

Food version

Class II

DALI-2 | ON/OFF

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo


Smart services:

Space management |

Push notification



Visit our website
for more information

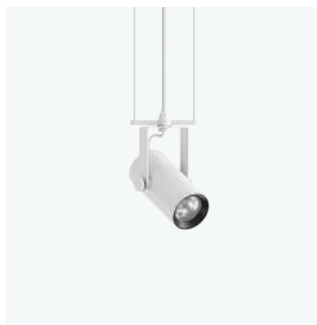

Ø60 mm PENDANT

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm PENDANT

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm PENDANT

3000K | 3500K | 4000K

up to 4352lm

up to 177lm/W

SS | S | M | F | WF

Other versions available

Downlights and recessed luminaires
p. 66




Tack recessed

Fixtures for mains voltage track p. 30



Tack



Tack pendant

Ceiling luminaires p. 246



Tack ceiling

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Rotation 358° | Tilting 80°

Lens | Reflector

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



O1
White



V0
Matte black



Visit our website
for more information
Tack: recessed available
from May 2026



Seville Nautical Club - Seville, Spain — Product: Laser - Pendant | Ø 75 mm | White
Ph: courtesy of Jacinto Pérez Elliot Arquitectura



PENDANT

Ø59 | Ø75 mm
2700K | 3000K | 4000K
CRI90
up to 1615lm
up to 104lm/W
M | F | WF



PENDANT FOR FILORAIL

Ø59 | Ø75 mm
2700K | 3000K | 3500K | 4000K
CRI90
up to 1615lm
up to 106lm/W
M | F | WF



PENDANT FOR LOW VOLTAGE TRACK

Ø59 | Ø75 mm
2700K | 3000K | 4000K
CRI90
up to 1615lm
up to 107lm/W
M | F | WF

Other versions available

Downlights and recessed luminaires p. 28

Fixtures for low voltage track p. 100

Ceiling luminaires p. 100



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Washer round



Laser Wall Washer square



Laser pendant for low voltage track



Laser pendant for Filorail



Laser ceiling

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP44 | IP65

6 sizes

Fixed | Adjustable

Frame | Minimal

Class I

Phase-cut

Casambi

DALI-2 | DALI Powerline

UGR<10

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01 White



04 Black

Optical finishes



01 White



14 Gold



E8 Gold-satin



E7 Chrome



E6 Burnished chrome



04 Black



Other awards

FX International Interior Design Award 2016



Visit our website for more information

LASER BLADE XS

design iGuzzini



Xeito offices - Madrid, Spain — Product: Laser Blade XS - Pendant | 26×26×600 mm | White
Ph: Javier de Paz García



HIGH CONTRAST - PENDANT

1 | 2X2 | 3X3 cells

2700K | 3000K | 4000K

up to 1930lm

up to 118lm/W

MF | WF



HIGH CONTRAST PENDANT FOR FILORAIL

3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K

up to 1700lm

up to 102lm/W

F | WF



HIGH CONTRAST - LOW VOLTAGE TRACK PENDANT

3 | 5 | 10 | 15 cells

2700K | 3000K | 3500K | 4000K

up to 1535lm

up to 104lm/W

F | WF

Other versions available

Downlights and recessed luminaires p. 6



Laser Blade XS High Contrast



Laser Blade XS Wall Washer LGC



Laser Blade Wall Washer



Laser Blade XS General lighting Pro




Laser Blade XS High Contrast - adjustable



Laser Blade XS High Contrast - ceiling



Laser Blade XS Wall Washer - ceiling



Laser Blade XS General lighting Pro - ceiling

Ceiling luminaires p. 226

Fixtures for low voltage track p. 102



Laser Blade XS High Contrast for Filorail



Laser Blade XS Wall Washer LGC for Filorail



Laser Blade XS General lighting Pro for Filorail



Laser Blade XS High Contrast - Low Voltage track



Laser Blade XS General Lighting Pro - Low Voltage track



Laser Blade XS Wall Washer - Low Voltage track



Laser Blade XS General Lighting Pro - Low Voltage track



Laser Blade XS High Contrast for Superrail



Laser Blade XS General Lighting Pro for Superrail



Laser Blade XS Wall Washer LGC for Superrail

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP43

4 sizes

Class II, III

ON/OFF

Casambi

DALI | DALI Broadcast | DALI Powerline |

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body finishes



O1 White



C1 Traffic white



B1 Signal white



V0 Matte black



O4 Black

Optical finishes



O1 White



14 Gold



E6 Burnished chrome



O4 Black



Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019



Visit our website for more information



“Rosalía de Castro” library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Isola - Pendant | Ø600 mm | GL | UGR<19 | White
Ph: Luis Díaz Díaz



PENDANT

Ø600 | Ø900 | Ø1200 mm

3000K | 4000K | Tunable White

up to 25000lm

up to 156lm/W

GL | UGR<19

Other versions available

Downlights and recessed luminaires
p. 42



Isola recessed

Wall luminaires
p. 212



Isola wall

Ceiling luminaires
p. 234



Isola ceiling

3000K | 4000K | Tunable White
(2700K±6500K)

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

DALI-2

Up & Down | Down emission

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |


Push notification




Visit our website
for more information



AAC Academy - Hamburg, Germany — Product: iPlan - UGR<19 | Up & Down light | 1200×300 mm | Aluminium
Ph: Heiner Leiska

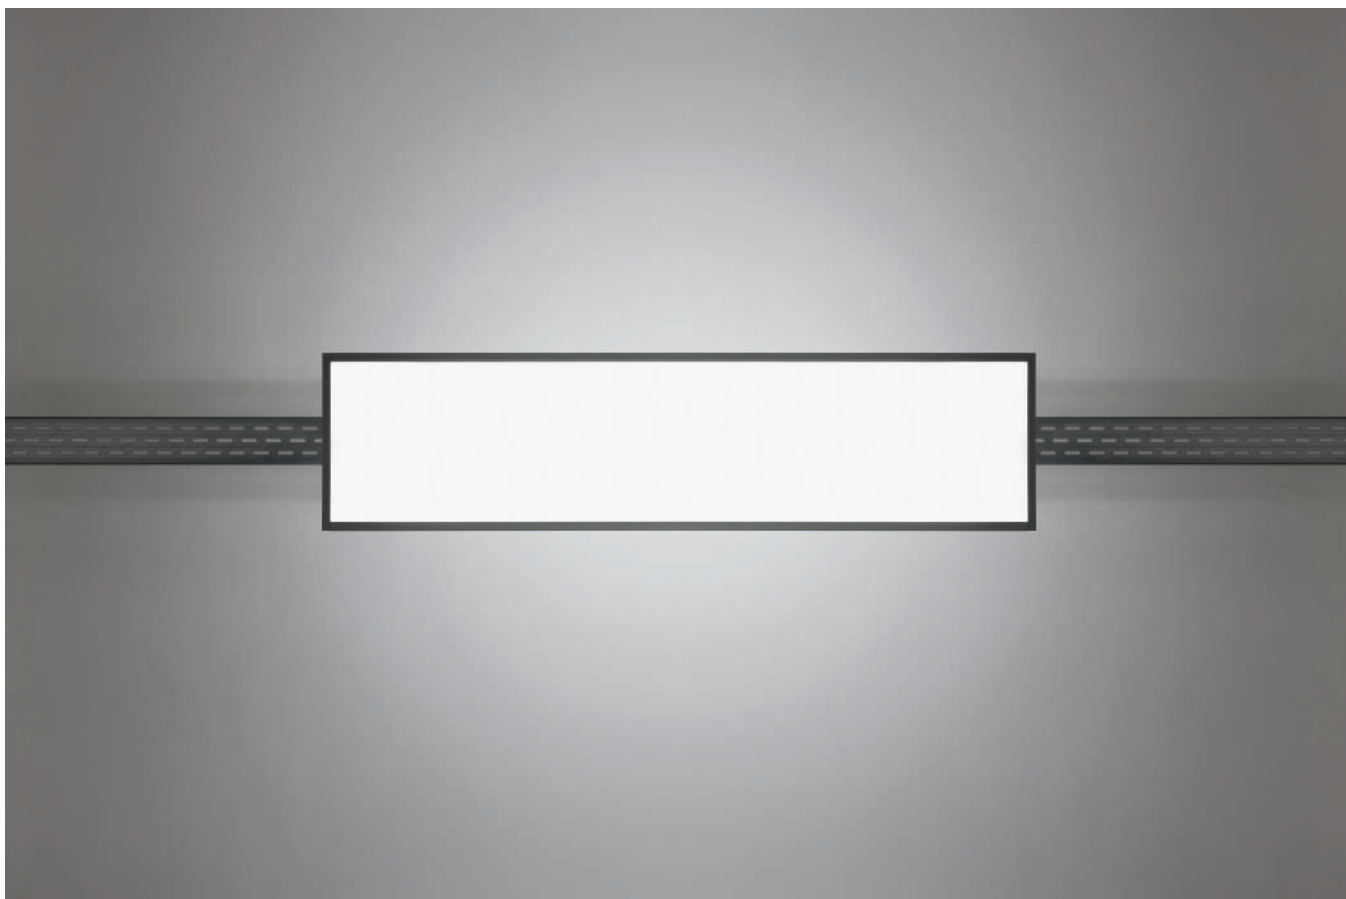

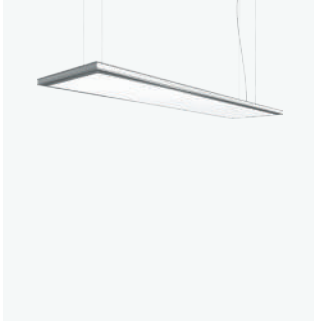

PENDANT RECTANGULAR

1200×300 mm

3000K | 4000K

up to 4781lm

up to 115lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 213



iPlan wall

Table and floor lamps p. 268



iPlan floor lamp

3000K | 4000K

CRI80

IP20

1 size

Class I

DALI-2

Up & Down | Down emission

Finish



12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



SQUARE PENDANT

600×600 mm | 625×625 mm

3000K | 3500K | 4000K

up to 3700lm

up to 117lm/W

GL | UGR<19

RECTANGULAR PENDANT

1200×300 mm

3000K | 3500K | 4000K

up to 3600lm


up to 110lm/W

GL | UGR<19

Other versions available

Ceiling luminaires p. 256

Pendants p. 164



iPlan Access square ceiling mounted

iPlan Access rectangular ceiling mounted

iPlan Access square recessed

iPlan Access rectangular recessed

3000K | 4000K

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

DALI-2 | Lux and motion sensor

Down emission

GL | UGR <19

Finishes



12 Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website for more information

IPLAN NEXT

design iGuzzini



SQUARE PENDANT

600×600 | 625×625 mm

up to 4700lm

up to 160lm/W

UGR<19

RECTANGULAR PENDANT

1200×3000 mm

up to 4700lm

up to 160lm/W

UGR<19

Other versions available

Ceiling luminaires p. 257



iPlan Next square ceiling mounted



iPlan Next rectangular ceiling mounted

Downlights and recessed luminaires p. 44



iPlan Next square recessed



iPlan Next rectangular recessed

3000K | 4000K

CRI90

IP20 | IP40

3 sizes

Class II

UGR<19

Down emission

ON/OFF

Organic Response (control + sensor)

Casambi | Casambi sensor

DALI-2 | DALI-2 sensor



Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website for more information

iPlan Next: ON/OFF, Casambi available from May 2026

DROP BY DROP

design Alfonso Femia/AF*design



Villa Borromeo d'Adda - Arcore, Italy — Product: Drop by drop - Accent lighting | Ø300 mm
Ph: Stefano Anzini



ACCENT LIGHTING

Ø300 mm

3000K

up to 2730lm

up to 72lm/W

Down emission



GENERAL LIGHTING

Ø300 mm

3000K

up to 2420lm

up to 76lm/W

Down emission

3000K

CRI80

IP20

1 size

WF | GL

Class I

DALI-2

Finishes



65
Nitric



07
Chromo

German Design Award 2020

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



Product: Clan - Ø520 | White
Ph: Paolo Carlini



PENDANT

Ø400 | Ø520 mm

2700K

up to 2452 lm

up to 163 lm/W

Down emission

Other versions available

Table and floor lamps p. 270



Clan table/floor



Clan floor

iGuzziniEchoes

3000K lamp not included

CRI80

IP20

2 sizes

GL

Class II

ON/OFF

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01
White



06
Yellow




16
Matte green



Visit our website
for more information



Product: Zurigo - 400 mm | Matte light blue
Ph: Alessandro Saletta - DSL Studio

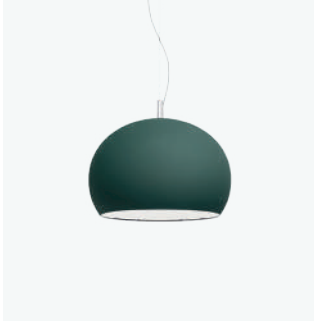


PENDANTS

400 mm

3000K

up to 1320lm

up to 73lm/W

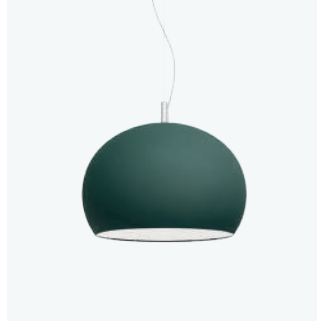

PENDANTS

520 mm

3000K

up to 1300lm

up to 72lm/W



PENDANTS

840 mm

3000K

up to 1411lm

up to 78lm/W

iGuzziniEchoes

3000K lamp not included

CR180

IP20 | IP43

3 sizes

Fixed

LED

Class II

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01 White



04 Black



14 Gold



24 Clear transparent



16 Matte green



17 Matte light blue



18 Matte blue




V2 Black cherry red



Visit our website for more information



LINEAR SYSTEMS




174 | IN30 EVO



175 | IN45



177 | IN60 EVO



180 | IN30



182 | LIBERA




184 | LIGHT SHED 14



186 | LINEALUCE 27



188 | LINEALUCE 47



190 | UNDERSCORE



192 | UNDERSCORE INOUT




194 | UNDERSCORE
LEDSTRIP




SYSTEM OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90



SYSTEM HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90



SYSTEM WALL WASHER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1250lm/m
 up to 85lm/W
 WW
 Frame | Minimal
 CRI80 | CRI90



STAND-ALONE OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90




STAND-ALONE HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90

Other versions available

Ceiling luminaires p. 250 / Linear system p. 174



Evo System Opal



Evo System High Contrast



Evo System Wall Washer

Pendants p. 134



Evo System Opal



Evo System High Contrast



Evo System Wall Washer



Evo Stand-alone Opal



Evo Stand-alone High Contrast

2700K | 3000K | 3500K | 4000K
 CRI80 | CRI90
 IP20
 Frame | Minimal
 GL | UGR <10 | WW
 Class I
 Down | Up & Down emission
 DALI-2 | CASAMBI | EMERGENCY (Integral)

Intelligent Light Solutions


Smart controls:

Organic Response | Quick BLE
 (Casambi) | Quick DALI | Master Pro
 Evo

Smart services:

Space management | Push notification

Finishes



Visit our website for more information
 IN30 EVO available from September 2026



SYSTEM OPAL SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2300 lm/m (UGR <24)
 Up to 1400 lm/m (UGR <22)
 Up to 140 lm/W
 GL
 Frame
 CRI90



SYSTEM OFFICE SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 1050 lm/m
 Up to 120 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM SYSTEM RASTER

600 | 1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 Up to 3300 lm/m
 Up to 150 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM WALL WASHER

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2000 lm/m
 Up to 110 lm/W
 WW
 Frame
 CRI90



SYSTEM MAINS VOLTAGE TRACK

1200 | 2400 mm
 MV track inside the product



STAND-ALONE OPAL SCREEN

1200 | 2400 mm
 3000K | 4000K
 Up to 2300 lm/m (UGR <24)
 Up to 1400 lm/m (UGR <22)
 Up to 140 lm/W
 GL
 CRI90



STAND-ALONE OFFICE SCREEN

1200 | 2400 mm
 3000K | 4000K
 Up to 1050 lm/m
 Up to 120 lm/W
 UGR <19
 CRI90



STAND-ALONE RASTER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 Up to 3300 lm/m
 Up to 150 lm/W
 UGR <19
 CRI90

Other versions available

Ceiling luminaires p. 248



System Opal Screen



System Raster



System Office Screen



System Wall Washer



System Mains Voltage Track

Pendants p. 135



System
Opal Screen



System
Raster



System
Office Screen



System
Wall Washer



System
Mains Voltage
Track



Stand-Alone
Opal Screen



Stand-Alone
Raster



Stand-Alone
Office Screen

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



O1
White



V0
Matte black



Visit our website
for more information
IN45 available from
October 2026



Club Virgin Active Milano Bocconi - Milan, Italy — Product: iN60 Evo - System Opal | White
Ph: Paolo Carlini



SYSTEM SPACE

White transparent | Black transparent

1200 | 2400 mm

LED Module

3000K | 3500K | 4000K |
Tunable White

up to 6059lm/m

up to 169lm/W

GL | UGR<19

Up & Down adjustable emission



SYSTEM MMO

Metalized Modular Optic

1200 | 2400 mm

LED Module

3000K | 3500K | 4000K |
Tunable White

up to 5696lm/m

up to 154lm/W

UGR<19



SYSTEM MPO

Micro Prismatic Optic

600 | 900 | 1200 | 3600 mm

LED Module - Roll Screen

3000K | 3500K | 4000K

up to 1596lm/m

up to 141lm/W

UGR<19

Angular luminous module



SYSTEM OPAL

600 | 900 | 1200 | 3600 mm

LED Module - Roll Screen

3000K | 3500K | 4000K

up to 4898lm/m

up to 147lm/W

GL

Angular luminous module



SYSTEM WALL WASHER

600 | 1200 mm

LED Module

3000K | 3500K | 4000K

up to 1970lm

up to 104lm/W

WW

Other versions available

Downlights and recessed luminaires p. 36




iN60 Evo System Space



iN60 Evo System MMO



iN60 Evo System MPO



iN60 Evo System Opal



iN60 Evo System Wall Washer

Fixtures for main voltage track p. 76



iN60 Evo System Space



iN60 Evo System MMO



iN60 Evo System MPO



iN60 Evo System Opal

Pendants p. 137



iN60 Evo Stand-alone Opal



iN60 Evo Stand-alone MPO



iN60 Evo Stand-alone MMO



iN60 Evo Stand-alone Space



iN60 Evo System Opal



iN60 Evo System MPO



iN60 Evo System MMO




iN60 Evo System Space

Smart accessories for iN60 Evo



Organic Response



Quick BLE (Casambi)



DALI-2



Li-Fi

3000K | 3500K | 4000K | Tunable White (2700K - 6500K)

CRI80 | CRI90

IP20

GL | UGR<19

Up & Down | Down emission | Up & Down independent control

Class I

Organic Response (control + sensor)

Casambi | Casambi sensor | Casambi HF sensor

DALI-2 | DALI-2 sensor

Li-Fi

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes



01 White

04 Black

12 Aluminium



Visit our website for more information



Politecnico di Milano's Architecture Campus - Milan, Italy — Product: iN60 Evo - System Opal | White
Ph: Michele Nastasi



Innolving offices - Ancona, Italy — Product: iN30 - High contrast | UGR<19 | White
Ph: Studio Buschi



RECESSED LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL

Frame

CRI80



RECESSED HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm
(2×10 cells)

3000K | 4000K

up to 4131lm

up to 90lm/W

WF

Frame

CRI90 | CRI95



PENDANT LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL



PENDANT HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm
(2×10 cells)

3000K | 4000K

up to 4131lm

up to 90lm/W

WF



CEILING LOW CONTRAST

1200 | 2400 | 600x600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL



CEILING HIGH CONTRAST

1200 mm (2x5 cells) | 1400 mm (2x10 cells)

3000K | 4000K


up to 4131lm

up to 90lm/W

WF

Other versions available

Downlights and recessed luminaires p. 38



iN30 recessed
Low Contrast



iN30 recessed
high contrast

Pendants p. 140



iN30 pendant
Low Contrast



iN30 pendant
Higt Contrast

Ceiling luminaires p. 252



iN30 ceiling Low
Contrast



iN30 ceiling Higt
Contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Class I

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01
White



04
Black



12
Aluminium



Visit our website
for more information



Tenoha - Milan, Italy — Product: Libera - General lighting modules+Space lighting modules | Black/Transparent light
Ph: Paolo Carlini



SYSTEM - PENDANT

600 | 900 | 1200 | 1800
| 2300 | 2700 mm

up to 5287lm

up to 128lm/W

GL | UGR<19



STAND-ALONE PENDANT

1400 | 1800 mm

with sensor 1900 mm

up to 5222lm

up to 135lm/W

GL | UGR<19



STAND-ALONE PENDANT FOR FILORAIL

1200 | 1400 | 1800 mm

up to 4017lm

up to 145lm/W

GL | UGR<19

Other versions available

Wall luminaires p. 198



Libera System
- wall



Libera
stand-alone wall
mounted

Table and floor lamps p. 266



Libera System
- ceiling to floor



Libera
stand-alone floor



Libera
stand-alone
ceiling to floor

Fixtures for low voltage track p. 106



Libera
stand-alone
pendant for
Filorail

Linear systems p. 182




Libera System
- pendant



Libera System
- Space lighting
modules



Libera System
- General Li-
ghting modules



Libera System
- General Li-
ghting modules
without screen



Libera System
- Led strip for Up
light



Libera System
- mounting and
power supply
accessories

Smart accessories for Libera



Organic
Response



Quick BLE
(Casambi)



DALI-2

2700K | 3000K | 3500K | 4000K

CRI90

6 lengths

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)

Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor

IP20

Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)



Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

- Body finishes**
-  01 White
 -  04 Black
 -  N8 Titanium
 -  N9 Sapphire
- Optical finishes**
-  R4 White transparent
 -  83 Black Transparent
 -  B9 Smoked
 -  P2 Microtextured



Other awards

BrightStar Award 2024
Grand Prix du Design (Gold and Platinum) 2024
Production Innovation Award 2024
Good Design 2024



Visit our website
for more information

LIGHT SHED 14

design iGuzzini



HSBC Bank branch_Montevideo, Uruguay — Product: Light shed 14 - 2383×140×48 mm | Up & Down emission | UGR<19 | Black/ transparent white
Ph: Santiago Chaer



CEILING MOUNTED

1200 | 1600 | 2400 | 3200 mm

up to 14760lm

up to 161lm/W

UGR<19

Opti Diamond



PENDANT

1200 | 1600 | 2400 | 3200 mm

up to 14760lm

up to 161lm/W

UGR<19

Opti Diamond

Other versions available

Fixtures for main voltage track p. 74

Ceiling luminaires p. 247

Pendants p. 130



Light Shed 14 track



Light Shed 14 ceiling mounted



Light Shed 14 pendant

Smart accessories for Light Shed 14



Organic Response



Quick BLE (Casambi)



DALI-2

3000K | 4000K

CRI80 | CRI90

IP20

4 lengths

Opti Diamond - UGR<19

Emergency

Class I

Up & Down | Down emission

Organic Response (control + sensor)

Casambi

DALI-2 | DALI-2 sensor

Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Body finishes

01 White



04 Black



Optical finishes

R4 White transparent




83 Black Transparent



Visit our website for more information



Mercato Centrale - Milan, Italy — Product: Linealuce 27 - Wall Grazing
Ph: Alessandra Chemollo



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CR180

Other versions available

Ceiling luminaires p. 258



Linealuce 27
surface Full
remote

Floor recessed luminaires p. 408



Linealuce 27
recessed Full
Remote

Linear systems p. 368



Linealuce 27
recessed Full
Remote



Linealuce 27
surface Full
remote

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown



Other awards:
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information



Zooprofylaxis Institute Ancona, Italy — Product: Linealuce 47 - Recessed Integral | Rust brown
Ph: iGuzzini archive



SURFACE REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 96lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 88lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

102×52 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5146lm

up to 86lm/W

WGS | WGM | WGWF

CRI80



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 89lm/W

WGS | WGM | WGWF | WF

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 84lm/W

WGS | WGM | WGWf | WF

CRI80

Other versions available

Ceiling luminaires p. 260



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box

Downlights and recessed Luminaires p. 425



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

Linear systems p. 370



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

Recessed wall luminaires p. 419



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGB-W 3000K | RGB-W 4000K | Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey




F5 Rust brown



Visit our website for more information



Playfair Library at Edinburgh University Edinburgh, Scotland — Product: Underscore
Ph: Paul Zanre Photography




15 RECESSED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Frame recessed low linear profile
- Frame recessed high linear profile
- Minimal recessed high linear profile
- Opal diffuser screen
- Traslucid diffuser screen



15 SURFACE-MOUNTED

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Surface low linear profile
- Surface high linear profile
- Opal diffuser screen



15 CORNER

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Angular profile
- Opal diffuser screen
- Traslucid diffuser screen



15 PERIMETRAL

- Ledstrip High Performance
- Ledstrip High Performance Tube
- Perimetral Profile
- Opal diffuser screen
- Traslucid diffuser screen




18 PERIMETRAL

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Minimal recessed high linear profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



18 SURFACE

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Surface high linear profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



18 PERIMETRAL

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Perimetral profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen

Other versions available

Led strips / Lighting Effect luminaires p. 294



Underscore15
Recessed



Underscore15
Surface-
mounted



Underscore15
Corner



Underscore15
Perimetral



Underscore18
Recessed
Minimal



Underscore18
Surface



Underscore18
Perimetral

Aluminium profiles compatible with
Underscore Ledstrip



Visit our website
for more information



Piazza della Libertà - Macerata, Italy — Product: Underscore InOut - Side Bend 16 mm
Ph: iGuzzini archive



SIDE BEND 10 mm

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Lighting Effect luminaires p. 296



Underscore
InOut Side Bend
10 mm



Underscore
InOut Side Bend
16 mm



Underscore
InOut Top Bend
16 mm



Underscore
InOut Top Bend
16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification



Finishes

01
White

ArchiExpo i-NOVO Awards 2016




Visit our website for more information

UNDERScore LEDSTRIP

design iGuzzini



Avalokiteśvara altar - Zhoushan Islands, Zhejiang, China — Product: Underscore ledstrip
Ph: Meng Wang



HIGH PERFORMANCE

5 mt
2700K | 3000K | 3500K | 4000K
up to 14075lm
up to 152lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm




TUBE HIGH PERFORMANCE

5 mt
2700K | 3000K | 3500K | 4000K
up to 12975lm
up to 141lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm



COB

5 mt
2700K | 3000K | 4000K | RGBW |
Tunable White
up to XXlm
up to XXlm
24V
XXW/m | XXW/m | XXW/m | XXW/m
Free-cut 50 mm

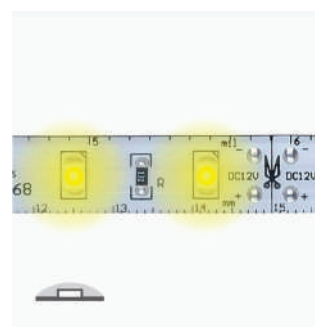


12/24V

5 mt
3000K | 4000K | RGBW
up to 10500lm
up to 140lm/W
24V
15W/m | 20W/m
Free-cut 100 mm




TUBE NO-DOT 24V

5 mt
 2700K | 3000K | 3500K | 4000K
 up to 10475lm
 up to 100lm/W
 24V
 5W/m | 10W/m | 15W/m | 20W/m
 Free-cut 26 mm

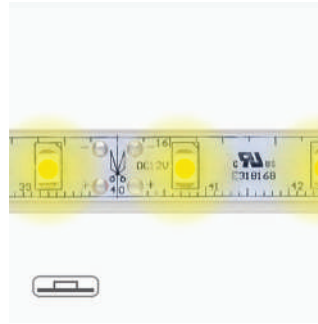

TUBE 12/24V

5 mt
 2700K | 3000K | 4000K | RGB
 up to 10000lm
 up to 104lm/W
 12V | 24V
 14W/m | 19W/m
 Free-cut 125 mm

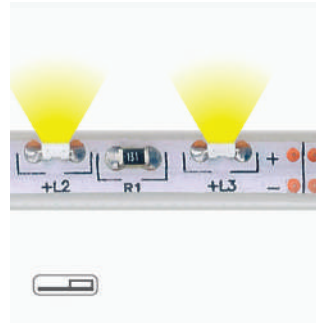

TUBE SIDE 12V

5 mt
 2700K | 3000K | 4000K | RGB
 up to 2650lm
 up to 110lm/W
 12V
 5W/m
 Free-cut 50 mm

Other versions available

Led strips / Lightning effect luminaires p. 292



Underscore Ledstrip High Performance



Underscore Ledstrip Tube High Performance



Underscore Ledstrip CoB



Underscore Ledstrip 12/24V



Underscore Ledstrip tube no-dot 24V



Underscore Ledstrip tube 12/24V



Underscore Ledstrip tube side 12V

2200 | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White

CRI90

IP20

1 length

General Lighting

Class III

Power supply to be ordered separately

12V | 24V

Casambi

DALI - 2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification



Finish

01 White



Visit our website for more information
 Underscore CoB available from May 2026



GIACINTO MOTTA
1843

PROF. DI LETTERE E SCIENZE
NELLE UNIVERSITÀ DI TORINO
E DI PADOVA

MEMORIE
PUBBLICATE DALLA SOCIETÀ
DI SCIENZE LETTERE E
ARTI DI TORINO

GIACINTO MOTTA
1843

PROF. DI LETTERE E SCIENZE
NELLE UNIVERSITÀ DI TORINO
E DI PADOVA

MEMORIE
PUBBLICATE DALLA SOCIETÀ
DI SCIENZE LETTERE E
ARTI DI TORINO

WALL LUMINARIES



198 | LIBERA



200 | VIEW



202 | SIPARIO



204 | PALCO



208 | LE PERROQUET




210 | NEWFO



212 | ISOLA



213 | IPLAN



214 | ISIGN



215 | MOTUS




216 | ALLURE



218 | LINGOTTO



220 | IPRO



222 | LIGHT UP ORBIT





SYSTEM - WALL

600 | 900 | 1200 | 1800 | 2300 | 2700 mm

2700K | 3000K | 3500K | 4000K

up to 5287lm

up to 128lm/W

GL | UGR<19



STAND-ALONE WALL MOUNTED

600 | 1200 mm

2700K | 3000K | 4000K

up to 1827lm

up to 110lm/W

GL

Smart accessories for Libera



Organic Response



Quick BLE (Casambi)



DALI-2



Libera stand-alone pendant for Filorail

Other versions available

Pendants p. 128



Libera System - pendant



Libera stand-alone pendant



Libera stand-alone pendant for Filorail

Table and floor lamps p. 266



Libera System - ceiling to floor



Libera stand-alone pendant



Libera stand-alone ceiling to floor

Linear systems p. 182




Libera System - pendant



Libera System - Space lighting modules



Libera System - General Lighting modules



Libera System - general lighting modules without screen



Libera System - mounting and power supply accessories

2700K | 3000K | 3500K | 4000K

CRI90

5 lengths

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)

Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor

Matter

PWM

ON/OFF

IP20

Class I

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Body finishes

01 White



04 Black



N8 Titanium



N9 Sapphire



Optical finishes

R4 White transparent



83 Black Transparent



B9 Smoked



P2 Microtextured



reddot winner 2024
best of the best



Other awards

BrightStar Award 2024

Grand Prix du Design (Gold and Platinum) 2024

Production Innovation Award 2024

Good Design 2024



Visit our website
for more information



Politecnico di Milano's Architecture Campus - Milan, Italy — Product: View - Wall mounted 210×144 mm | White
Ph: Michele Nastasi



WALL MOUNTED 170x124 mm

3000K | 4000K

up to 2880lm

up to 85lm/W

WW



WALL MOUNTED 210x144 mm

3000K | 4000K

up to 3520lm

up to 79lm/W

WW

Other versions available

Fixtures for mains voltage track p. 58



View Opti Linear

3000K | 4000K

CRI80

IP20

2 sizes

OptiBeam Lens

Class I

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01
White



47
White/Black




Other awards
German Design Award 2019



Visit our website
for more information



**SURFACE Ø22 mm**

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens

**SURFACE Ø40 mm**

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens


**SURFACE Ø56 mm**

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens | Optibeam Refractor

**RECESSED Ø22 mm**

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens

**RECESSED Ø40 mm**

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens

**RECESSED Ø56 mm**

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens | Optibeam Refractor

Other versions available


Fixtures for main voltage track p. 48

Fixtures for low voltage track p. 82

Ceiling luminaires p. 236




Sipario

Sipario Zoom
framer

Sipario beamer

Sipario Low
VoltageSipario Low
Voltage
With rod

Sipario surface



Sipario recessed

2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

3 sizes

Opti Beam Lens | Opti Beam Refractor

Class III (DALI-2 | Casambi | ON/OFF:
with external power supply to be
ordered separately)**Intelligent Light Solutions****Smart controls:**

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:Space management |
Push notification**Finishes**01
WhiteV0
Matte blackVisit our website
for more information



Puju Tea Space - Hangzhou, China — Product: Palco - Surface Ø19 mm | Black
Ph: Hanmo Vision, Song Ye




SURFACE Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens

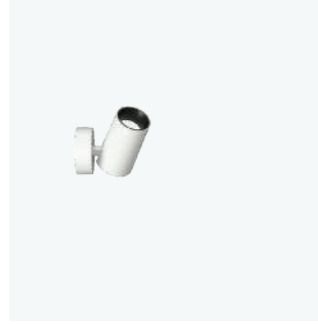


SURFACE Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens




SURFACE Ø51 mm

up to 1014lm

up to 67lm/W

S | WF

Opti Beam Lens




SURFACE Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

Class III



SURFACE Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

Class III




RECESSED Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens



RECESSED Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens




RECESSED Ø51 mm

up to 1014lm

up to 67lm/W

S | WF

Opti Beam Lens



RECESSED Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

Class III



RECESSED Ø37 mm FRAMER

up to 173lm


Framer

Gobo 5° - 10°

Class III

ACCESSORIES OPTI BEAM REFRACTOR

- 1 Interchangeable reflector
- 2 Refractor for medium elliptical distribution
- 3 Refractor for broad elliptical distribution
- 4 Soft Lens Filter
- 5 Honeycomb louvre
- 6 Cylindrical screen
- 7 Directional fins.

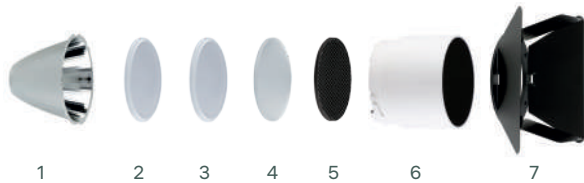

ACCESSORIES OPTI BEAM LENS

- 8 Opti Beam Refractor Medium
- 9 Opti Beam Refractor Flood
- 10 Opti Beam Refractor Wide Flood
- 11 Refractor for medium elliptical distribution
- 12 Refractor for broad elliptical distribution
- 13 Honeycomb louvre



Other versions available

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framer for Filorail



Palco Low Voltage Wall Washer for Filorail




Palco Low Voltage



Palco Low Voltage Wall Washer

Ceiling luminaires p. 238




Palco surface



Palco framer surface



Palco recessed



Palco framer recessed

2700K | 3000K | 4000K

CRI90

IP20

Class III (DALI-2 | Casambi | ON/OFF: with external power supply to be ordered separately)

Opti Beam Lens | Framer

Finishes



01 White



04 Black



Other awards

Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |


Push notification



Visit our website for more information



Headquarters of the council of Europe - Bruxelles, Belgium — Product: Le Perroquet - Ø156 mm | White
Ph: Marc Detiffe



SURFACE Ø55 mm

2700K | 3000K | 3500K | 4000K

up to 496lm

up to 74lm/W

S | M | WF




Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



Ø156 mm

up to 3665lm

up to 97lm/W

S | F | WF



Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF

Other versions available

Fixtures for mains voltage track p. 62

Fixtures for low voltage track p. 98

Pendants p. 150

Ceiling luminaires p. 242



Le Perroquet



Le Perroquet pendant



Le Perroquet for Filorail




Le Perroquet pendant for Filorail



Le Perroquet pendant



Le Perroquet surface



Le Perroquet recessed

ACCESSORIES

- 1 Refractor for elliptical distribution
- 2 Cylindrical screen
- 3 Directional fins



3000K

CR190

IP20 | IP40

3 sizes

OptiBeam Reflector

Class III (DALI-2 | Casambi | ON/OFF: with external power supply to be ordered separately | DALI-2

Rotation 360° | Tilting 90°

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Finishes


- 01 White
- 06 Yellow
- 02 Orange
- 04 Black
- 05 Red
- 09 Sky blue
- 15 Grey



Visit our website for more information

NEWFO

design iGuzzini

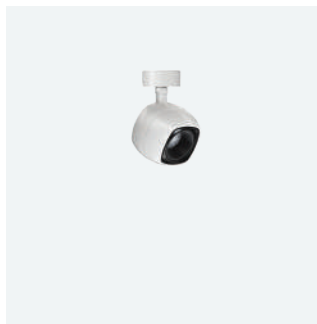


SURFACE Ø62 mm

up to 896lm

up to 87lm/W

S | M | F | WF

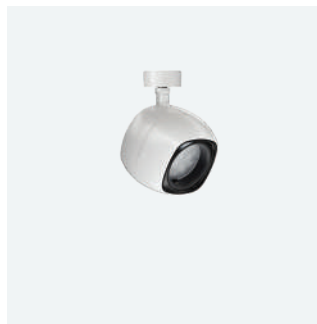

SURFACE Ø88 mm

up to 1818lm

up to 108lm/W

M | F | WF

Other versions available

Fixtures for low voltage track p. 94

Fixtures for mains voltage track p. 60



Newfo Low Voltage for Filorail



Newfo Low Voltage pendant for Filorail



Newfo Low Voltage for Low Voltage track



Newfo Low Voltage pendant for Low Voltage track



Newfo for Mains Voltage track



Newfo pendant for Mains Voltage track

Ceiling luminaires



Newfo surface



Newfo surface pendant



Newfo recessed



Newfo recessed pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP43

2 sizes

360° | 355° | 90°

Optibeam Reflector | Optibeam Lens | Optibeam Refractor

Class II

Casambi

DALI-2

Class III (DALI-2 | Casambi | ON/OFF : with external power supply)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body Finishes



O1 White



O4 Black



N8 Titanium



O0 Titanium/White



O0 Titanium/Black

Optical Finishes



O4 Black



N8 Titanium



U7 Brass



V6 Matte copper



Visit our website for more information

ISOLA

design iGuzzini



WALL

Ø600 | Ø900 mm

3000K | 4000K

up to 13162lm

up to 151lm/W

GL

Up & Down emission

Other versions available

Downlights and recessed luminaires
p. 42



Pendants p. 160



Ceiling luminaires
p. 234



3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

Up & Down | Down emission

DALI-2

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



WALL-MOUNTED

640×200×50 mm

3000K | 4000K

up to 3359lm

up to 113lm/W

UGR<19

Other versions available

Pendants p. 162



Table and floor lamps p. 268



3000K | 4000K

CRI80

IP20

Class I

Up & Down emission

DALI-2

Finish



12
Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



WALL/CEILING

Ø80 mm

3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Pendants p. 142



3000K | 4000K

CRi80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2

Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finish

24
Clear transparent



Visit our website
for more information



PICTOGRAM

Ceiling/Wall/Flag-mounted

Visibility 26 m

Operating modes SA e SE

Emergency autonomy 3h

Self-test



ESCAPE

Spacing 21 m

Recessed circular version

Surface-mounted square version

Autonomy 3h

Recharge time 12h

Self-test

Operating modes SA e SE

DALI monitoring (recessed versions)



ANTIPANIC

Recessed circular version

Surface-mounted square version

Autonomy 3h

Recharge time 12h

Self-test

Operating modes SA e SE

DALI monitoring (recessed versions)



SUP/INCAS

Opal diffuser

Surface-mounted / Semi-recessed

Autonomy 1-1,5-2-3h

Recharge time 12h

Self-test

DALI monitoring

Operating modes SA e SE

Other versions available

Wall luminaires



Emergency luminaires

Batteries LiFePO4

Automatic self-test

Versions with adjustable durations and light outputs

Recessed, wall, and ceiling installation

Versions with DALI monitoring

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Other awards:
Innovation Technology Design 2004



Visit our website
for more information



Boutique Kryz - Montauban, France — Product: Allure - 120×150 mm | White
Ph: Didier Boy De La Tour



120×150 mm

2700K | 3000K | 3500K | 4000K

up to 1570lm

up to 120lm/W

AF | AS-DOWN | AF-UP | AS-UP | AF/
AF | AF/AS | AS/AS

1 PG

CRI80



120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-
UP | AF/AF | AF/AS | AS/AS

2 PG through wiring

CRI80



GRAPHIC 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 42lm/W

L up | L down | ADJ Beam Up | ADJ
Beam Down | L/ADJ Beam | ADJ
Beam / L | L/L | ADJ Beam / ADJ Beam

1 PG

CRI80



SMART 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 1570lm

up to 113lm/W

AF | AS-DOWN | AF-UP | AS-UP | AF/
AF | AF/AS | AS/AS

1 PG

CRI80



SMART 120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS

2 PG through wiring

CRI80

Other versions available

Lighting effect luminaires p. 304



Allure Graphic
120×150 mm

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I, II

ON/OFF

Casambi

DALI-2

Smart versions: HF motion (Plug& Play) | HF motion Casambi

Lower raster to be purchased separately

Polycarbonate flush-mounted cover 150×79 mm

Carter with visible edge in polycarbonate 150×79 mm

Casing with visible edge in PMMA 150×79 mm

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo






Smart services:

Space management | Push notification

Body Finishes Allure Graphic and Allure Smart

	01 White		F5 Rust brown		M4 Shiny lead
	04 Black		F7 Shiny copper		M5 Polished urban bronze
	07 Green		H3 Shiny black		I9 Satin transparent
	15 Grey		M3 Shiny sand		

Body Finishes

	01 White		15 Grey
	04 Black		F5 Rust brown
	07 Green		



Other awards
Grand Prix du Design 2024
Good Design 2024



Visit our website
for more information



Monterosa 91 - Milan, Italy — Product: Lingotto without base | Grey/Yellow
Ph: Michele Nastasi



WITHOUT BASE

2200K | 3000K | 4000K

270×240 mm

up to 5380lm

up to 128lm/W

A60 | ST1.0 | ST1.5 | STCy0.5

Outgoing cable

CRI70 | CRI80



WITH BASE

2200K | 3000K | 3500K | 4000K

270×240 mm

up to 5380lm

up to 128lm/W

A60 | GL | ST1.0 | ST1.5 | STCy0.5

2PG

CRI65 | CRI70 | CRI80



WITH EXTERNAL BOX

2200K | 3000K | 3500K | 4000K |

Tunable warm

270×240 mm

up to 6087lm

up to 116lm/W

S | F | WF | WW | A

CRI65 | CRI80

A | F | S | WF | WW

Other versions available

Pole mounted multiple flood p. 356



Pole minimal and connected



2200K | 3000K | 3500K | 4000K |
Tunable warm

CRI65 | CRI70 | CRI80

IP66, IP20 | IK07, IK06

Class I, II

DALI-2 | Midnight preset/ZHAGA

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



Visit our website
for more information



Aiello Building Center - Rende, Italy — Product: iPro - Ø51 - Wall-mounted - Up & Down light | White
Ph: Giuseppe Saluzzi



51 mm WALL MOUNTED

3000K | 4000K
51×51×56 | 51×51×161 mm
up to 221lm
up to 49lm/W
VWF | L | L/VWF | VWF/VWF | L/L
1G
CRI80



81 mm WALL MOUNTED

3000K | 4000K
up to 494lm
up to 64lm/W
F | VWF | L
2 PG
CRI80



132 mm WALL MOUNTED

3000K | 4000K
up to 1522lm
up to 109lm/W
F | VWF | WF | S | M
2 PG
CRI80



155 mm WALL MOUNTED

3000K | 4000K | Tunable white
up to 2457lm
up to 97lm/W
VWF | WF
2 PG
CRI80



192 mm WALL MOUNTED

3000K | 4000K | RGB | Tunable white
 up to 6609lm
 up to 111lm/W
 F | M | S | VWF | WF
 2 PG
 CRI80

Other versions available

Floodlights p. 392



iPro

Pole mounted multiple flood p. 354



MultiPro on pole



MultiPro with minimal and connected pole



MultiPro wall mounted

Ceiling mounted p. 262



iPro ceiling mounted

Pole minimal and connected



MultiPro wall mounted

3000K | 4000K | RGB | Tunable white
 CRI80
 IP66 | IK07
 Class I, II, III
 ON/OFF | DALI-2 | DMX-RDM
 Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Space management |
 Push notification

Finishes




Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Villa Waterfall - Porto Cervo, Italy — Product: Light Up Orbit - body in stainless steel
Ph: Stefano Ferrando, Studio Vetrolu



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



**BODY IN STAINLESS STEEL
FLUSH MOUNTED**

2700K | 3000K | 4000K


Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



**BODY IN STAINLESS STEEL /
ALL GLASS FLUSH MOUNTED**

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting Effect luminaires p. 302 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414




Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush
mounted




Light Up Orbit
Body in stainless
steel / all glass
flush mounted




Light Up Orbit
Body in stainless
steel




Light Up Orbit
Body in stainless
steel flush
mounted




Light Up Orbit
Body in stainless
steel / all glass
flush mounted



Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush
mounted



Light Up Orbit
Body in stainless
steel / all glass
flush mounted

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III (DALI-2 | Casambi | ON/OFF :
with external power supply)

Resistance to static load (2000kg)

Power supply to be
ordered separately

Mounting accessories to be
ordered separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



04
Black

12
Steel




Visit our website
for more information



CEILING LUMINARIES



226 | LASER BLADE XS



228 | BETWO



230 | LASER



232 | EASY



234 | ISOLA



236 | SIPARIO



238 | PALCO



242 | LE PERROQUET



246 | TACK



247 | LIGHT SHED 14




248 | IN45



250 | IN30 EVO



252 | IN30



254 | ISIGN



256 | IPLAN ACCESS



257 | IPLAN NEXT



258 | LINEALUCE 27



260 | LINEALUCE 47



262 | IPRO

LASER BLADE XS

design iGuzzini



Ruess Group offices - Stuttgart, Germany — Product: Laser Blade XS - High contrast + Wall washer | Black/black
Ph: Zooey Braun



HIGH CONTRAST - CEILING

1 | 5 | 10 | 15 cells
 2700K | 3000K | 3500K | 4000K
 up to 3150lm
 up to 117lm/W
 M | F | WF
 CL I, III



WALL WASHER - CEILING

10 cells
 2700K | 3000K | 3500K | 4000K
 up to 820lm
 up to 60lm/W
 WW-LGC
 CL I, III



GENERAL LIGHTING PRO - CEILING

5 | 10 | 15 cells
 2700K | 3000K | 3500K | 4000K
 up to 2830lm
 up to 106lm/W
 GL-PRO
 CL I, III

Other versions available

Downlights and recessed luminaries p. 6

Pendants p. 158



Laser Blade XS High Contrast



Laser Blade XS Wall Washer LGC



Laser Blade XS Wall Washer



Laser Blade XS General Lighting Pro



Laser Blade XS Adjustable



Laser Blade XS High Contrast - pendant

Fixtures for low voltage track p. 102



Laser Blade XS High Contrast for Filorail



Laser Blade XS Wall Washer LGC for Filorail



Laser Blade XS General lighting Pro for Filorail



Laser Blade XS High Contrast pendant for Filorail



Laser Blade XS High Contrast - Low Voltage track



Laser Blade XS Wall Washer - Low Voltage Track



Laser Blade XS General Lighting Pro - Low Voltage track



Laser Blade XS High Contrast - Low Voltage track pendant



Laser Blade XS High Contrast for Superrail



Laser Blade XS General Lighting Pro for Superrail



Laser Blade XS Wall Washer LGC for Superrail

2700K | 3000K | 3500K | 4000K | Tunable White (2700K - 5700K)

CRI80 | CRI90

IP20

4 sizes

Fixed | Adjustable

Frame | Minimal

Class I

DALI-2 | ON/OFF

Class III (DALI-2 | ON/OFF : with external power supply o be ordered separately)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Smart services:


Space management |

Push notification

Body Finishes

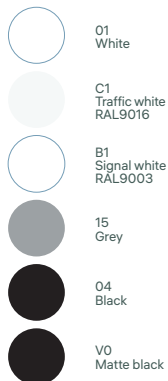

Optical Finishes



Other awards
Lighting Design Award 2017
Design L+B 2018
German Design Award 2019



Visit our website for more information





CEILING GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W




CEILING UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W



PURE CEILING GENERAL LIGHTING

Ø114 | Ø172 | Ø234 mm

up to 4324lm

up to 122lm/W



PURE CEILING UGR<19

Ø172 | Ø234 mm

up to 2447lm

up to 122lm/W

Other versions available

Fixtures for mains voltage track p. 60

Pendants p. 152



Betwo



Betwo Pure



Betwo pendant



Betwo Pure pendant

3000K | 3500K | 4000K

CRI90

IP40

3 sizes

Down emission

Opti Diamond

Class I

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body Finishes BeTwo



O1
White



Q6
White champagne



Q4
Black



Q5
Black champagne

Body Finishes BeTwo Pure



D8
White transparent



83
Black transparent



Optical Finishes

D8
White transparent



83
Black transparent



Visit our website
for more information



Format n10 - Milan, Italy — Product: Laser ceiling | Gold-satin
Ph: Riccardo Banfi



CEILING

Ø59 | Ø75

up to 1615lm

up to 103lm/W

M | F | WF

Other versions available

Downlights and recessed luminaries p. 28



Laser fixed round



Laser fixed square



Laser adjustable round



Laser Wall Washer round



Laser Wall Washer square

Fixtures for low voltage track p. 100



Laser pendant for Filorail



Laser pendant for low voltage track

Pendants p. 156



Laser pendant

2700K | 3000K | 4000K

CRI90

IP20

2 sizes

Class I

DALI-2 | Phase-cut

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body Finishes



01 White



04 Black

Optical Finishes



01 White



14 Gold



E8 Gold-satin



E7 Chrome



E6 Burnished chrome



04 Black



Other awards
FX International Interior Design Award 2016



Visit our website for more information



“Rosalía de Castro” library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain — Product: Easy ceiling UGR<19 | White
Ph: Luis Díaz Díaz



CEILING GENERAL LIGHTING

Ø172 | Ø234 mm
 3000K | 3500K | 4000K
 up to 4725lm
 up to 130lm/W



CEILING UGR<19

Ø114 | Ø172 | Ø234 mm
 3000K | 3500K | 4000K
 up to 4410lm
 up to 135lm/W

Other versions available

Downlights and recessed luminaires p. 20

Pendants p. 148



Easy



Easy UGR<19



Easy GL



Easy



Easy UGR<19



Easy GL

3000K | 4000K

CRI80 | CRI90

IP20 | IP40 | IP54

2 sizes

Fixed

Frame

Class I

DALI-2

ON/OFF Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body Finishes



01
White



04
Black

Optical Finishes



01
White



12
Aluminium



39
White/Aluminium



Visit our website
for more information



“Rosalía de Castro” library in Vilagarcía de Arousa Vilagarcía De Arousa, Spain - Product: Isola — Aura/down light | UGR<19 | White
Ph: Luis Díaz Díaz



CEILING LIGHT

Ø600 | Ø900 mm

3000K | 4000K

up to 13162lm

up to 156lm/W

GL | UGR <19

Up & Down | Down emission

Other versions available

Downlights and recessed luminaires
p. 42



Isola recessed

Pendants p. 160



Isola pendant

Wall luminaires p. 212



Isola wall

3000K | 4000K | Tunable White

CRI80 | CRI90

IP20 | IP40

3 sizes

Class II

GL | UGR<19

Up & Down | Down emission

DALI-2

Finishes



01
White



04
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification




Visit our website
for more information

SIPARIO MONOPOINT

design iGuzzini





SURFACE Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



SURFACE Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



SURFACE Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens




RECESSED Ø22 mm

up to 160lm

up to 76lm/W

S | M

Opti Beam Lens



RECESSED Ø40 mm

up to 648lm

up to 67lm/W

M | F | WF

Opti Beam Lens



RECESSED Ø56 mm

up to 1186lm

up to 91lm/W

M | F | WF | VWF | WW

Opti Beam Lens

Other versions available

Fixtures for mains voltage track p. 48

Fixtures for low voltage track p. 82


Wall luminaires p. 202



Sipario



Sipario



Sipario Zoom
Framer



Sipario Beamer



Sipario Low
Voltage



Sipario Low
Voltage with rod



Sipario surface



Sipario recessed

2700K | 3000K | 3500K | 4000K

CRI90 | CRI97

IP20

3 sizes

Opti Beam Lens

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF: with external power supply to be ordered separately)

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01
White




V0
Matte black



Visit our website
for more information



Smriti Van Earthquake Museum & Memorial - Bhuj, Kutch, India — Product: Palco framer Ø99 mm
Ph: Bharat Aggarwal

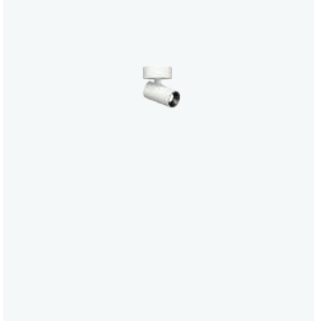


SURFACE Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens

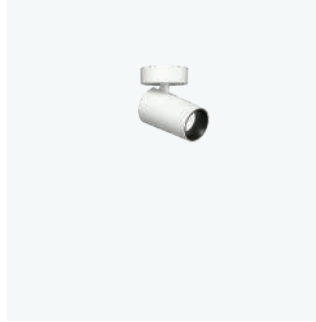

SURFACE Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens




SURFACE Ø51 mm

up to 1200lm

up to 80lm/W

S | WF

Opti Beam Lens




SURFACE Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

CL III




SURFACE Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

CL III




RECESSED Ø19 mm

up to 154lm

up to 77lm/W

M

Opti Beam Lens




RECESSED Ø37 mm

up to 504lm

up to 62lm/W

S | WF

Opti Beam Lens

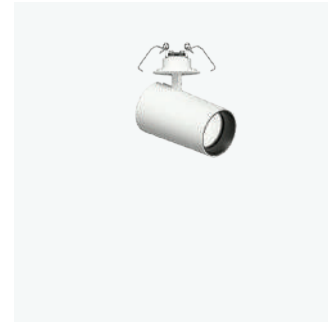


RECESSED Ø51 mm

up to 1200lm

up to 80lm/W

S | WF

Opti Beam Lens




RECESSED Ø19 mm FRAMER

up to 21lm

Framer

Gobo 5°

CL III



RECESSED Ø37 mm FRAMER

up to 173lm

Framer

Gobo 5° - 10°

CL III



Pink Villa Design Studio - Stockholm, Sweden — Product: Palco Recessed / Surface, Palco surface Ø37mm
Ph: Max Rommel, courtesy of Nichetto Studio

Other versions available

Fixtures for mains voltage track p. 52



Palco Pro



Palco



Palco Wall Washer



Palco Framed

Wall luminaries p. 204



Palco Surface



Palco Framed Surface



Palco recessed



Palco Framed recessed

Fixtures for low voltage track p. 86



Palco Low Voltage for Filorail



Palco Low Voltage Framed for Filorail




Palco Low Voltage Wall Washer for Filorail



Palco Low Voltage



Palco Low Voltage Wall Washer



Palco Low Voltage Framed



Palco Low Voltage with rod

2700K | 3000K | 4000K

CRI90

IP20

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF: with external power supply to be ordered separately)

Opti Beam Lens | Framed

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01 White

04 Black



Other awards
Premio dei premi per l'innovazione 2018
CODEGA 2018
German Design Award 2018
Delta award 2018
Progress Report Selection 2020



Visit our website for more information



Cultural Centre of the Stavros Niarchos Foundation Athens, Greece — Product: Le Perroquet - Ø156 mm | Grey
Ph: Michel Denancé



RECESSED Ø55 mm

up to 496lm

up to 74lm/W

S | M | WF



RECESSED Ø80 mm

up to 1436lm

up to 97lm/W

M | F | WF



SURFACE Ø55 mm

up to 496lm

up to 74lm/W

S | M | WF



SURFACE Ø80 mm

up to 1436lm

up to 97lm/W

M | F | WF



RECESSED Ø55 mm PENDANT

up to 496lm

up to 74lm/W

S | M | WF



RECESSED Ø80 mm PENDANT

up to 1436lm

up to 97lm/W

M | F | WF



SURFACE Ø55 mm PENDANT

up to 496lm

up to 74lm/W

S | M | WF



SURFACE Ø80 mm PENDANT

up to 1436lm

up to 97lm/W

M | F | WF



WALL/CEILING Ø89 mm

up to 1768lm

up to 79lm/W

M | F | WF



WALL/CEILING Ø156 mm

up to 3665lm

up to 98lm/W

S | F | WF



WALL/CEILING Ø162 mm

up to 4305lm

up to 99lm/W

M | F | WF



Private office - Chicago, USA — Product: Le Perroquet - Pendant | Ø156 mm | Grey/Black
Ph: Nic Lehoux

Other versions available

Fixtures for mains voltage track p. 62



Le Perroquet



Le Perroquet pendant

Fixtures for low voltage track p. 98



Le Perroquet for Filorail track



Le Perroquet for Filorail

Wall luminaries p. 208



Le Perroquet wall

Pendants p. 150



Le Perroquet pendant

2700K | 3000K | 3500K | 4000K

CRI90

IP20 | IP40

5 sizes

OptiBeam Reflector | Optibeam Lens

Class I (DALI-2)

Class III (DALI-2 | Casambi | 0-10 V | ON/OFF : with external power supply to be ordered separately)

DALI-2

360° Rotation | 90° Tilting

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI








Master Pro Evo

Smart services:

Space management |

Push notification

Finishes

-  01 White
-  06 Yellow
-  02 Orange
-  04 Black
-  05 Red
-  09 Sky blue
-  15 Grey



Visit our website for more information

TACK

design iGuzzini



Ø60 mm CEILING

3000K | 3500K | 4000K

up to 1766lm

up to 153lm/W

S | M | F | WF



Ø80 mm CEILING

3000K | 3500K | 4000K

up to 3088lm

up to 171lm/W

SS | S | M | F | WF



Ø90 mm CEILING

3000K | 3500K | 4000K


up to 4352lm

up to 177lm/W

SS | S | M | F | WF


Other versions available

Downlights and recessed luminaires
p. 30



Tack recessed

Pendants p. 155



Tack pendant

Fixtures for mains voltage track p. 66



Tack

3000K | 3500K | 4000K

CRI90

IP20 | IP40

3 sizes

Lens | Reflector

Class I

DALI-2

Finishes



01
White



V0
Black

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information
Tack: ceiling
available from
May 2026

LIGHT SHED 14

design iGuzzini



CEILING MOUNTED

1200 | 1600 | 2400 | 3000 mm

up to 6500lm

up to 147lm/W

UGR<19

Opti Diamond

Other versions available

Fixture for main voltage track p. 74



Light Shed 14 track

Linear system p. 184



Light Shed 14 track



Light Shed 14 ceiling mounted




Light Shed 14 pendant

Smart accessories for Light Shed 14



Organic Response



Quick BLE (Casambi)



DALI-2

3000K | 4000K

CRI80 | CRI90

IP20

4 lengths

Opti Diamond - UGR<19

Emergency

Up & Down | Down emission

Class I

Organic Response (control + sensor)

Casambi

DALI-2 | DALI-2 sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body Finishes



O1
White



O4
Black



Optical Finishes

R4
White transparent



83
Black Transparent



Visit our website
for more information




SYSTEM OPAL SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2300 lm/m (UGR <24)
 Up to 1400 lm/m (UGR <22)
 Up to 140 lm/W
 GL
 Frame
 CRI90




SYSTEM OFFICE SCREEN

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 1050 lm/m
 Up to 120 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM SYSTEM RASTER

600 | 1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 Up to 3300 lm/m
 Up to 150 lm/W
 UGR <19
 Frame
 CRI90



SYSTEM WALL WASHER

600 | 1200 | 2400 mm
 3000K | 4000K
 Up to 2000 lm/m
 Up to 110 lm/W
 WW
 Frame
 CRI90



SYSTEM MAINS VOLTAGE TRACK

1200 | 2400 mm
 MV track inside the product

Other versions available

Pendant p. 135 / Linear systems p. 175



System
Opal Screen



System
Raster



System
Office Screen



System
Wall Washer



System
Mains Voltage
Track



Stand-Alone
Opal Screen

3000K | 4000K

CRI90

IP20

GL | UGR <19 | WW

Down | Up & Down emission

Class I

Organic Response (Control + sensor | DALI-2 | DALI-2 sensor | DALI-2 Emergency DALI monitoring 3 h (Self-contained) | Casambi | Casambi sensor

Intelligent Light Solutions

Smart controls:

Organic Response

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



O1
White



V0
Matte black




Visit our website
for more information

iN45 available from
October 2026



METAL 57 - Boulogne-Billancourt, France — Product: iN30 Evo - Ceiling high contrast | Black
Ph: Didier Boy de la Tour



SYSTEM OPAL

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1700lm/m
 up to 102lm/W
 GL
 Frame | Minimal
 CRI80 | CRI90



SYSTEM HIGH CONTRAST

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 2500lm/m
 up to 95lm/W
 S | F | WF | VWF
 Frame | Minimal
 CRI90



SYSTEM WALL WASHER

1200 | 2400 mm
 2700K | 3000K | 3500K | 4000K
 up to 1250lm/m
 up to 85lm/W
 WW
 Frame | Minimal
 CRI80 | CRI90

Other versions available

Downlights and recessed luminaires p. 40

Pendant p. 134 / Linear systems p. 174



iN30 EVO recessed Opal



iN30 EVO recessed High contrast



iN30 EVO recessed Wall Washer



iN30 EVO pendant Opal




iN30 EVO pendant High Contrast



iN30 EVO pendant Wall washer

3000K | 4000K
 CRI80 | CRI90 | CRI95
 IP20
 2 versions
 Class I
 DALI-2



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:


Space management |
 Push notification



Visit our website
 for more information
 iN30 EVO available from
 September 2026



Innoliving Office_Ancona, Italy — Product: iN30 ceiling-mounted low contrast | White
Ph: Studio Buschi



CEILING LOW CONTRAST

1200 | 2400 | 600×600 mm

3000K | 4000K

up to 4081lm

up to 107lm/W

GL



CEILING HIGH CONTRAST

1200 mm (2×5 cells) | 1400 mm (2×10 cells)

3000K | 4000K

up to 3888lm

up to 83lm/W

WF

Other versions available

Downlights and recessed luminaires p. 38

Pendants p. 140



iN30 recessed low contrast



iN30 recessed high contrast



iN30 pendant low contrast



iN30 pendant high contrast

3000K | 4000K

CRI80 | CRI90 | CRI95

IP20

2 versions

Fixed

Frame

Class I

DALI-2

Finishes



01 White



04 Black



12 Aluminium

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |


Push notification



Visit our website for more information



Marsan media library - Marsan, France — Product: iSign - Ø80 mm | Clear transparent
Ph: Didier Boy de la Tour



WALL/CEILING

Ø80 mm

3000K | 4000K

up to 4415lm

up to 124lm/W

Other versions available

Pendants p. 142



3000K | 4000K

CRI80

IP67 | IK08

1630 | 1910 mm

LED

Class II

DALI-2 | ON/OFF Emergency

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finish



24
Clear transparent



Visit our website
for more information



SQUARE CEILING MOUNTED

600×600 | 625×625 mm

3000K | 3500K | 4000K

up to 3700lm

up to 117lm/W

GL | UGR<19

RECTANGULAR CEILING MOUNTED

1200×300 mm

3000K | 3500K | 4000K

up to 3600lm

up to 111lm/W

GL | UGR<19

Other versions available

Downlights and recessed luminaires p. 45



iPlan Next square ceiling mounted



iPlan Next rectangular ceiling mounted

Pendants p. 164



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K

CRI80 | CRI90

IP20 | IP40


3 sizes

Class II

DALI-2 | Motion and lux sensor

Down emission

Finishes



Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website for more information



SQUARE RECESSED

600×600 | 625×625 mm

up to 4700lm

up to 160lm/W

UGR<19



RECTANGULAR RECESSED

1200×300 mm

up to 4700lm

up to 160lm/W

UGR<19

Other versions available

Ceiling luminaires p. 257



iPlan Next square ceiling mounted



iPlan Next rectangular ceiling mounted

Pendants p. 165



iPlan Next square pendant



iPlan Next rectangular pendant

3000K | 4000K

CR190

IP20 | IP40

3 sizes

Class II

UGR<19

Organic Response (control + sensor)

Casambi | Casambi sensor

DALI-2 | DALI-2 sensor

ON/OFF



Finish

01
White

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor) | Quick BLE (Casambi) | Quick DALI | Master Pro Evo

Smart services:

Space management | Push notification



Visit our website for more information
iPlan Next: ON/OFF, Casambi available from May 2026

LINEALUCE 27

design Jean-Michel Wilmotte



Product: Linealuce 27 - Surface Full Remote | Grey



SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K |
Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K |
Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K |
Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot

CRI80

Other versions available

Linear Systems p. 186

Recessed in-ground luminaires p. 406


Pendants p. 144



Linealuce 27
surface Full
remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
surface Full
remote

2220K | 2700K | 3000K | 4000K |
Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK08, IK09

Walkable (1000kg)

Class III

PWM (DALI-2 | Casambi | DMX-RDM
| ON/OFF : with external components
to be ordered separately)

Mounting accessories to be
ordered separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White

15
Grey

04
Black

F5
Rust brown



Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Mercato Centrale - Milan, Italy — Product: Linealuce 47 - Surface Integral | Grey
Ph: Alessandra Chemollo



SURFACE REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 96lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 88lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

102×52 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5146lm

up to 86lm/W

WGS | WGM | WGWF

CRI80

Other versions available

Recessed in-ground luminaires p. 404



Linealuce 47
Recessed
Remote



Linealuce 47
Recessed
Integral

Recessed ceiling luminaires p. 423



Linealuce47
recessed
Remote



Linealuce 47
recessed Integral

Recessed wall luminaires p. 416



Linealuce47
recessed
Remote



Linealuce 47
recessed Integral

Linear systems p. 186



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce47
recessed
Remote



Linealuce 47
recessed Integral

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

CRI80

IP66, IP67 | IK05, IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories
to be purchased separately

Finishes



01
White



15
Grey



04
Black



F5
Rust brown

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |


Push notification



Visit our website
for more information



Arese Shopping Center - Arese, Italy — Product: iPro - 155×155×190 mm | Grey
Ph: Paolo Carlini



51 mm CEILING MOUNTED

3000K | 4000K

up to 348lm

up to 82lm/W

F

CRI80



81 mm CEILING MOUNTED

3000K | 4000K

up to 526lm

up to 68lm/W

F

CRI80



132 mm CEILING MOUNTED

3000K | 4000K

up to 1522lm

up to 109lm/W

WF | VWF

CRI80



155 mm CEILING MOUNTED

3000K | 4000K

up to 2040lm

up to 104lm/W

WF | VWF

CRI80



192 mm CEILING MOUNTED

3000K | 4000K

up to 3304lm

up to 124lm/W

F | WF

CRI80

Other versions available

Floodlights p. 394



iPro

Wall mounted
p. 220



iPro ceiling
mounted

Pole minimal and connected
p. 220



MultiPro with
minimal and
connected pole

Pole mounted multiple flood p. 354



MultiPro on pole



MultiPro with
minimal and
connected pole



MultiPro wall
mounted

3000K | 4000K

CRI80

IP66 | IK07

Class I, II, III

Class III (DALI-2 | Phase-cut |
Middle of the Night | ON/OFF:
with external power supply
to be ordered separately)

ON/OFF | DALI-2 | DMX-RDM

Mounting accessories
to be ordered separately

Finishes

-  01
White
-  15
Grey
-  04
Black
-  F5
Rust brown



reddot winner 2010
best of the best



Visit our website
for more information



TABLE AND FLOOR LAMPS




266 | LIBERA



268 | IPLAN



270 | CLAN



272 | SORELLA



273 | NITIA




274 | POLSINO




275 | CESPUGLIO



276 | PIZZAKOBRA



277 | MYA



278 | CLAN MINI



279 | WHISPER





SYSTEM - CEILING TO FLOOR

600 | 900 | 1200 | 1800 |
2300 | 2700 mm

up to 5287lm

up to 129lm/W

GL | UGR<19



STAND-ALONE FLOOR

600 | 900 | 1200 | 1800 |
2300 | 2700 mm

up to 3616lm

up to 116lm/W

GL



STAND-ALONE CEILING TO FLOOR

600 | 900 | 1200 | 1800 |
2300 | 2700 mm

2700K | 3000K | 3500K

up to 3586lm

up to 91lm/W

GL

Other versions available

Wall luminaires p. 198



Smart accessories for Libera



Organic
Response

Quick BLE
(Casambi)

DALI-2

2700K | 3000K | 3500K | 4000K

CRI90

5 lengths

General Lighting | UGR<19

Space | Microtextured | Smoked

Up & Down | Down emission

Organic Response (control + sensor)


Casambi | Casambi Sensor

DALI-2 | DALI-2 Sensor


IP20

Class I

Body Finishes



Optical finishes



Other awards

BrightStar Award 2024
Grand Prix du Design (Gold and Platinum) 2024
Production Innovation Award 2024
Good Design 2024

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Visit our website
for more information



Heinemann Offices in HafenCity - Hamburg, Germany — Product: iPlan - Floor lamp | GL | Grey
Ph: Paolo Carlini



FLOOR LAMP

682×350×50 mm

3000K | 4000K

up to 13564lm

up to 123lm/W

GL

Other versions available

Wall luminaires p. 213

Pendants p. 162



iPlan wall



iPlan pendant

4000K
CRI80
IP20
Class I
Push Dim
Up & Down emission | Sensor

Intelligent Light Solutions

SMART CONTROLS:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

SMART SERVICES:

Space management |

Push notification

Finish



12
Aluminium



Visit our website
for more information



Private residence - Arcevia, Italy — Product: Clan - Yellow
Ph: Fabio Di Carlo



TABLE/FLOOR

Ø400 | Ø520 mm

2700K

up to 2452 lm

up to 163 lm/W



FLOOR

Ø400 | Ø520 mm


2700K

up to 2452 lm

up to 163 lm/W

Other versions available

Pendants p. 168



Clan pendant

iGuzziniEchoes

2700K lamp not included

CRI80

IP20

2 sizes

GL

Class II

ON/OFF



Visit our website
for more information



Ph: Paolo Carlini



TABLE LAMP

224×239×322 mm

2700K

up to 410lm

up to 95lm/W

iCuziniEchoes

2700K lamp not included

CR180

IP20

1 size

GL

Class I

ON/OFF

Finishes



01
White



04
Black



Visit our website
for more information



Ph: Paolo Carlini



TABLE LAMP

Ø180×300 mm

2700K

up to 170lm

up to 40lm/W

iGuzziniEchoes

2700K lamp not included

CR180

IP20


1 size

GL

Class I

ON/OFF

Finishes



01
White

04
Black

05
Red



Visit our website
for more information



Ph: DSL Studio



SMALL

130×210×170 mm

2700K

up to 350lm

up to 80lm/W



LARGE

180×250×380 mm

2700K

up to 600lm

up to 102lm/W

iGuzziniEchoes

2700K lamp not included

CR180

IP20

1 size

GL

Class I

ON/OFF

Finishes



01
White



47
White/Black



H9
White/Orange



Visit our website
for more information



Ph: Fabio Di Carlo



TABLE LAMP

400×330 mm

2700K

up to 470 lm

up to 109 lm/W

iGuzziniEchoes

2700K lamp not included

CR180

IP20

1 size

GL

Class I

ON/OFF

Finishes



01
White



04
Black



05
Red



Visit our website
for more information
Cespuglio available from
April 2026



Ph: iGuzzini archive



TABLE LAMP

295×285×18 mm

6700K

up to 190lm

up to 21lm/W

6700K

CRI74

IP20

GL

Class I

ON/OFF

Finishes



10
Chrome



reddot winner 2008
best of the best



Visit our website
for more information



Ph: Studio Buschi



TABLE LAMP

205 x 169 x 580 mm

3000K

up to 400lm

dimmable

Down emission



CAPSULE TABLE LAMP

205 x 169 x 580 mm

3000K

up to 400lm

dimmable

Down emission

3000K

CRI90

IP65

Up & Down | Down emission

Class III

ON/OFF

Finishes



G4
Black



G5
Borealis orange



G5
Black / Inti Yellow



G6
Black / Mantis Green



G7
Black / Gea Green



G8
Black / Uranus Blue



Visit our website
for more information



Ph: Luca Rotondo



TABLE LAMP

Ø110×312 mm

2200K | 2700K | 3000K

up to 225lm

Dimmable

Down emission

2200K | 2700K | 3000K

CR180

IP65

1 size

Up & Down | Down emission

Class III

ON/OFF

Finishes

35 Champagne

16 Matte green

17 Matte light blue

18 Matte blue

V1 Matte sand

V2 Black cherry red



Visit our website
for more information



Ph: Fabio Di Carlo



TABLE LAMP

Ø96×340 mm
2200K | 2700K | 3000K
up to 230lm
Dimmable
Down emission

TABLE LAMP UP & DOWN

Ø96×340 mm
2200K | 2700K | 3000K
up to 185lm
Dimmable
Up & Down emission

2200K | 2700K | 3000K

CRI80

IP65

1 size

Up & Down | Down emission

Class III

ON/OFF

Finishes



Visit our website for more information



EMERGENCY LIGHTING



282 | MOTUS



383 | LIGHT SHED 14



284 | LIGHT SHED 60



286 | BLADE R



287 | EASY SPACE



288 | EASY



289 | ISIGN



PICTOGRAM

Ceiling/Wall/Flag-mounted
 Visibility 26 m
 Operating modes SA e SE
 Emergency autonomy 3h
 Self-test



ESCAPE

Spacing 21 m
 Recessed circular version
 Surface-mounted square version
 Autonomy 3h
 Recharge time 12h
 Self-test
 Operating modes SA e SE
 DALI monitoring (recessed versions)



ANTIPANIC

Recessed circular version
 Surface-mounted square version
 Autonomy 3h
 Recharge time 12h
 Self-test
 Operating modes SA e SE
 DALI monitoring (recessed versions)




SUP/INCAS

Opal diffuser
 Surface-mounted / Semi-recessed
 Autonomy 1-1,5-2-3h
 Recharge time 12h
 Self-test
 DALI monitoring
 Operating modes SA e SE

Other versions available

Wall luminaires

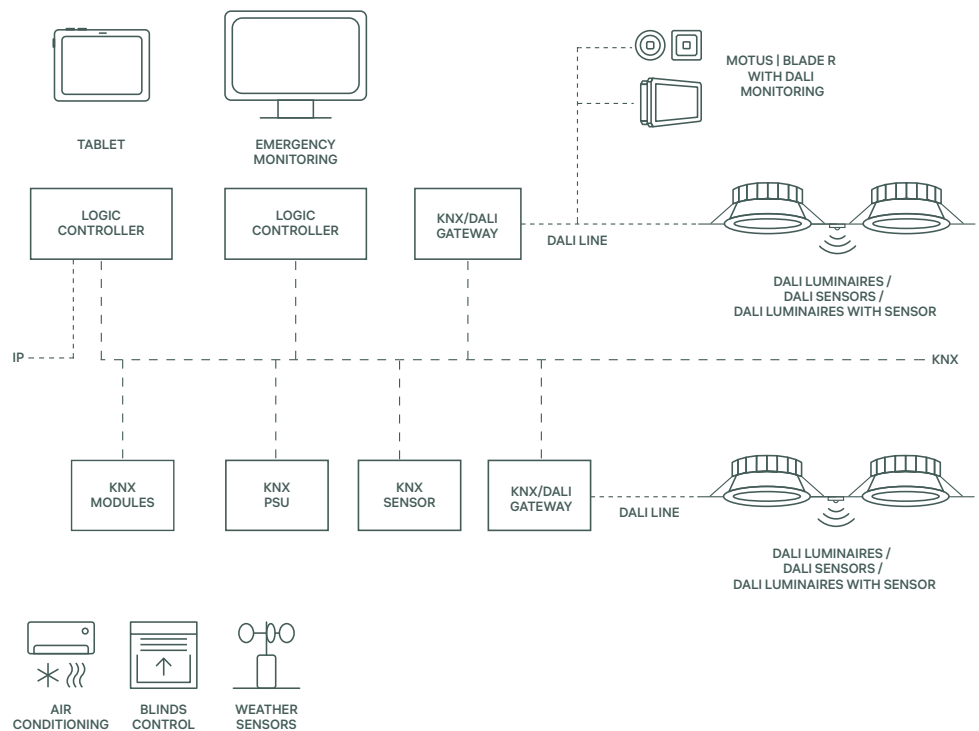

Emergency luminaires

Batteries LiFePO4

Automatic self-test

Versions with adjustable durations and light outputs

Recessed, wall, and ceiling installation

Versions with DALI monitoring

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification



Other awards:
 Innovation Technology Design 2004



Visit our website
 for more information

LIGHT SHED 14

design iGuzzini



PENDANT

5282lm | 139lm/W

1584 | 2772 mm

up to 5282lm

up to 139lm/W

UGR<19

Opti Diamond

Class I

DALI-2

Emergency ON/OFF 3 h autonomy

Other versions available

Pendants p.130



Light Shed 14
pendant

Ceiling luminaries p. 247



Light Shed 14
ceiling

3000K | 4000K

CRI80 | CRI90

IP20

2 lengths

Opti Diamond - UGR<19

Class I

DALI-2 | DALI-2 sensor

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Body finishes



01
White



04
Black

Optical finishes



D8
White transparent



83
Black transparent



Visit our website
for more information

LIGHT SHED 60

design iGuzzini



RECESSED

600×600 mm
3000K | 4000K
up to 3976lm
up to 117lm/W
UGR<19
Emergency 3h autonomy
Emergency ON/OFF 3 h autonomy

PENDANT

600×600 mm
3000K | 4000K
up to 3976lm
up to 117lm/W
UGR<19
Emergency 3h autonomy
Emergency ON/OFF 3 h autonomy

Other versions available

Downlights and recessed luminaires
p. 34



Light Shed 60
recessed

Pendants p.132




Light Shed 60
pendant

3000K | 4000K
CRI80
IP20 | IP43
1 size
Fixed
MPO (Micro Prismatic Optic)
Class II

Intelligent Light Solutions

Smart controls:
Quick DALI
Master Pro Evo

Smart services:
Space management |
Push notification



Other awards:
Gold Certificate a "Les Grands Prix du Design" 2022
IES Progress Report 2023



Visit our website
for more information



Park Associati Studio - Milan, Italy — Product: Light Shed 60 / Green
Ph: Paolo Carlini



EMERGENCY LIGHTING

- for Blade R Ø170 mm
- 5000K
- up to 220 lm
- Anti-Panic | Escape-Route
- Autonomia 3h
- Ricarica 12h
- Autotest
- Funzionamento SA e SE
- DALI monitoring

Other versions available

Downlights and recessed luminaires p. 16



Blade R



Blade R +
Adjustable light



Blade R +
Profiled light



Blade R +
Loudspeaker



Blade R + Framer



Blade R +
Variable light



Blade R +
DALI-2

2700K | 3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP42

1 size

Fixed

Frame | Minimal

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |

Push notification

Finishes



01
White



47
White/Black



reddot winner 2020
best of the best



Other awards:
Progress Report Selection 2020
Red Dot Design Award (Innovative Products) 2020
Lux Awards 2020
Lighting Design Awards 2020
German Design Award 2022



Visit our website
for more information



GENERAL LIGHTING

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4929lm
 up to 120lm/W
 Emergency ON/OFF 3 h autonomy

UGR<19

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4515lm
 up to 110lm/W
 Emergency ON/OFF 3 h autonomy

UGR<19 - MICROFILM

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 2581lm
 up to 107lm/W
 Emergency ON/OFF 3 h autonomy

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP54


2 sizes

Fixed


Frame

Class II

Body finishes



Optical finishes



Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Smart services:

Space management |
 Push notification



Visit our website
 for more information




GENERAL LIGHTING

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4664lm
 up to 114lm/W
 Emergency ON/OFF 3 h autonomy



UGR<19

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 4410lm
 up to 108lm/W
 Emergency ON/OFF 3 h autonomy

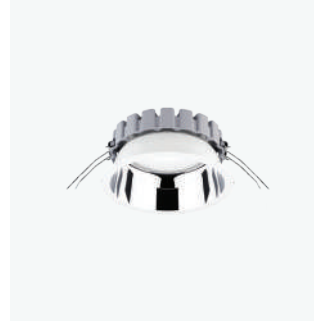

UGR<19 - MICROFILM

Ø153 | Ø212 mm
 3000K | 3500K | 4000K
 up to 2581 lm
 up to 107lm/W
 Emergency ON/OFF 3 h autonomy



CEILING GENERAL LIGHTING

Ø234 mm
 3000K | 4000K
 up to 3330lm
 up to 106lm/W
 Emergency ON/OFF 3 h autonomy




CEILING UGR<19

Ø234 mm
 3000K 4000K
 up to 3108lm
 up to 100lm/W
 Emergency ON/OFF 3 h autonomy



PENDANT GENERAL LIGHTING

Ø234 mm
 3000K | 4000K
 up to 3330lm
 up to 106lm/W
 Emergency ON/OFF 3 h autonomy

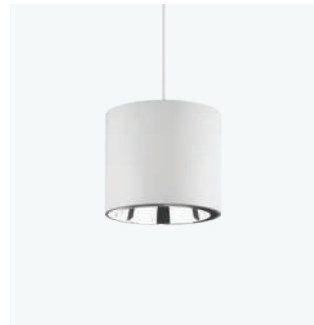

PENDANT UGR<19

Ø234 mm
 3000K | 4000K
 up to 3108lm
 up to 99lm/W
 Emergency ON/OFF 3 h autonomy

Other versions available


Downlights and recessed luminaires p. 20

Ceiling luminaires p. 232

Pendants p. 148



General Lighting



UGR<19




UGR<19
Microfilm



Wall Washer



Easy ceiling



Easy ceiling

3000K | 3500K | 4000K

CRI80 | CRI90

IP20 | IP40 | IP54

2 sizes

Fixed

Frame

Class I, II

Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Optical finishes



01
White



12
Aluminium



39
White/Aluminium

Body finishes



01
White



04
Black




Visit our website
for more information



Other versions available

Wall luminaires p. 214

Pendants p. 142



PENDANTS

Ø80 mm

3000K | 4000K

up to 4415lm

up to 121lm/W

Emergency ON/OFF 3h autonomy

WALL/CEILING

Ø80 mm

3000K | 4000K

up to 4415lm

up to 121lm/W

Emergency ON/OFF 3h autonomy

3000K | 4000K

CRI80

IP67 | IK08

1630 mm | 1910 mm

GL

LED

Class II

Finish



24
Clear transparent



Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Smart services:

Space management |


Push notification



Visit our website
for more information



LIGHTING EFFECT LUMINAIRES



292 | UNDERSCORE
LEDSTRIP



294 | UNDERSCORE




296 | UNDERSCORE
INOUT



298 | TRICK



300 | IPRO



302 | LIGHT UP ORBIT



304 | ALLURE

UNDERScore LEDSTRIP

design iGuzzini



Holy Deer San Lorenzo Lodge - Rome, Italy — Product: Underscore Ledstrip
Ph: Giovanni De Sandre



LEDSTRIP HIGH PERFORMANCE

5 mt
2700K | 3000K | 3500K | 4000K
up to 14075lm
up to 152lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm



LEDSTRIP TUBE HIGH PERFORMANCE

5 mt
2700K | 3000K | 3500K | 4000K
up to 12975lm
up to 141lm/W
24V
5W/m | 10W/m | 15W/m | 20W/m
Free-cut 50 mm



COB

5 mt
2700K | 3000K | 4000K | RGBW |
Tunable White
up to XXlm
up to 105lm/W
24V
| XXW/m | XXW/m | XXW/m
Free-cut 50 mm




LEDSTRIP 12/24V

5 mt
3000K | 4000K | RGBW
up to 10500lm
up to 140lm/W
24V
15W/m | 20W/m
Free-cut 100 mm




LEDSTRIP TUBE NO-DOT 24V

5 mt
 2700K | 3000K | 3500K | 4000K
 up to 10475lm
 up to 100lm/W
 24V
 5W/m | 10W/m | 15W/m | 20W/m
 Free-cut 26 mm



LEDSTRIP TUBE 12/24V

5 mt
 2700K | 3000K | 4000K | RGB
 up to 10000lm
 up to 104lm/W
 12V | 24V
 14W/m | 19W/m
 Free-cut 125 mm

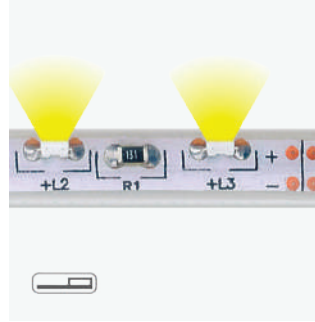

LEDSTRIP TUBE SIDE 12V

5 mt
 2700K | 3000K | 4000K | RGB
 up to 2650lm
 up to 110lm/W
 12V
 5W/m
 Free-cut 50 mm

2200 | 2700K | 3000K | 3500K |
 4000K | RGBW | Tunable White
 CRI90
 IP20
 1 length
 General Lighting
 Class III (DALI-2 | DMX-RDM | Casambi | ON/OFF : with external components to be ordered separately)
 Power supply to be ordered separately
 12V | 24V
 ON/OFF
 Casambi
 DALI-2

Intelligent Light Solutions

Smart controls:
 Organic Response (control + sensor)
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo
 Quick DMX
 Master Pro DMX


Smart services:
 Space management |
 Push notification



Visit our website for more information
 Underscore CoB available from May 2026



Fernand Cina winery - Salgesch, Switzerland — Product: Underscore
Ph: Roland Halbe




15 RECESSED

- _____ Ledstrip High Performance
- _____ Ledstrip High Performance Tube
- _____ Ledstrip 24V
- _____ Frame recessed low linear profile
- _____ Frame recessed high linear profile
- _____ Minimal recessed high linear profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



15 SURFACE-MOUNTED

- _____ Ledstrip High Performance
- _____ Ledstrip High Performance Tube
- _____ Ledstrip 24V
- _____ Surface low linear profile
- _____ Surface high linear profile
- _____ Opal diffuser screen



15 CORNER

- _____ Ledstrip High Performance
- _____ Ledstrip High Performance Tube
- _____ Ledstrip 24V
- _____ Angular profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



15 PERIMETRAL

- _____ Ledstrip High Performance
- _____ Ledstrip High Performance Tube
- _____ Ledstrip 24V
- _____ Perimetral Profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen




18 PERIMETRAL

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Minimal recessed high linear profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



18 SURFACE

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Surface high linear profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen



18 PERIMETRAL

- _____ Ledstrip 12V - RGB
- _____ Ledstrip 24V - RGBW | Tunable White
- _____ Perimetral profile
- _____ Opal diffuser screen
- _____ Traslucid diffuser screen

Aluminium profiles compatible with
Underscore Ledstrip



Visit our website
for more information

UNDERScore INOUT

design iGuzzini



Doha Metro - Doha, Qatar — Product: Underscore InOut
Ph: Nigel Downes



SIDE BEND 10 mm

2600K | 2900K | 3700K
| 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K
| 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K
| 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Linear systems p. 192




Underscore
InOut Side Bend
10 mm



Underscore
InOut Side Bend
16 mm



Underscore
InOut Top Bend
16 mm



Underscore
InOut Top Bend
16 mm

2600K | 2900K | 3700K | 3800K |
4600K | RGB | Tunable White | RGBW

CRI80

IP68 | IK10

Class III (DALI-2 | DMX-RDM |
Casambi | SPI | ON/OFF : with external
components to be ordered separately)

PWM | SPI

Power supply to be ordered
separately



Finish

01
White

ArchiExpo i-NOVO Awards 2016

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Space management |
Push notification



Visit our website
for more information



Songyuan House - Ancient City of Zhujiajiao, China — Product: Trick — Radial | Grey
Ph: Wang Zilu



EM

3000K

Ø110×166 mm

up to 66lm

up to 5lm/W

360° Blade optic (divided in ten sectors that can be controlled separately)

Through wiring

CR180

Base with longitudinal and transverse adjustment for the installation
Ø108×54 mm

Base plate with longitudinal adjustment
Ø108×45 mm installation

Plate with longitudinal adjustment for the installation in an indoor environment
Ø116×25 mm



360° AND LIGHT BLADE EFFECT

3000K | RGB

Ø89×140 | Ø124×164 mm

up to 180lm

up to 19lm/W

360° Blade optic | L/L

Outgoing cable

CR180



RADIAL

3000K

Ø110×42 | Ø110×75 | Ø160×85 mm

up to 528lm

up to 38lm/W

R360°

Outgoing cable

CR180



180°

3000K
 Ø89×57 | Ø110×89 mm
 up to 150lm
 up to 33lm/W
 L180°
 Outgoing cable
 CRI80



WASHER

3000K
 Ø89×57 | Ø110×89 mm
 up to 191lm
 up to 49lm/W
 W
 Outgoing cable
 CRI80

Other versions available

Ceiling mounted luminaires p. 466

Wall mounted p. 448



Trick em



Trick 360° and light blade effect



Trick radial



Trick em



Trick 360° and light blade effect



Trick radial



Trick 180°



Trick washer



Trick 180°



Trick washer

3000K | RGB

CRI80

IP20, IP66 | IK07

Class II, Class III (DALI-2 | DMX-RDM | ON/OFF : with external components to be ordered separately)

Mounting accessories to be purchased separately

Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Space management |

Push notification



Body Finishes

01 White



04 Black



15 Grey



F5 Rust brown



E4 White/Chrome



E5 White/Grey

Other colours on request



reddot winner 2015
best of the best



reddot winner 2025
best of the best

Other awards:
 Compasso d'Oro Menzione d'Onore 2016
 Win World Interiors Awards 2014
 Premis Delta ORO 2014
 Lux Awards 2014
 Lighting Design Award 2015
 Light Middle East Award: Outdoor Lighting
 Product of the Year 2025
 Grand Prix du Design 2025



Visit our website
for more information



Private residence in Neuilly-sur-Seine - France — Product: iPro - 51 mm | Wall-mounted | Up & Down light | Grey
 Ph: Didier Boy de la Tour



WALL MOUNTED

51×51×56 | 51×51×161 | 81×81×86 mm

3000K | 4000K

up to 221lm

up to 49lm/W

L | L/L | L/VWF | VWF/VWF

CRI80

Other versions available

Floodlights p. 394




iPro

Wall mounted luminaires p. 220



iPro wall mounted

Pole mounted multiple flood p. 352



MultiPro on pole



MultiPro with minimal and connected pole



MultiPro wall mounted

Ceiling mounted p. 262



iPro Ceiling mounted

Pole minimal and connected



MultiPro wall mounted

3000K | 4000K

CRI80

IP66 | IK07

Class II | ON/OFF

Class III (DALI-2 | Phase-cut | ON/OFF : with external power supply to be ordered separately)

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX


Master Pro DMX

Smart services:

Space management |

Push notification


Finishes



Visit our website for more information



Canva - Sydney, Australia — Product: Light Up Orbit
Ph: Rohan Venn



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH MOUNTED

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

In-ground luminaires p. 404 / Recessed downlights p. 426 / Recessed wall luminaires p. 416




Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush
mounted




Light Up Orbit
Body in stainless
steel / all glass
flush mounted



Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush
mounted




Light Up Orbit
Body in stainless
steel / all glass
flush mounted



Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush
mounted



Light Up Orbit
Body in stainless
steel / all glass
flush mounted

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III (DALI-2 | ON/OFF : with external power supply to be ordered separately)

Resistance to static load (2000kg)

Remote power supply to be ordered separately

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management | Push notification

Body Finishes



12
Steel



Body Finishes all glass flush mounted
04
Black



12
Steel



Body Finishes flush mounted



12
Steel



14
Gold



69
Bronze



E6
Burnished chrome



Visit our website
for more information



Private residence - Arcevia, Italy — Product: Allure Graphic - Rust brown
Ph: Fabio Di Carlo



GRAPHIC 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 42lm/W

L up | L down | ADJ Beam Up | ADJ
Beam Down | L/ADJ Beam | ADJ
Beam / L | L/L | ADJ Beam / ADJ Beam

CRI80

Other versions available

Lighting effect luminaires p. 480



Allure Wall
120×150 mm



Allure Wall
120×250 mm



Allure Wall
Graphic
120×150 mm



Allure Wall
Smart
120×150 mm



Allure Wall
Smart
120×250 mm

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I

ON/OFF

Lower raster to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick DALI

Master Pro Evo

Raster finishes



01
White



F5
Rust brown



M4
Shiny lead



04
Black



F7
Shiny copper



M5
Polished urban
bronze



07
Green



H3
Shiny black



I9
Satin transparent



15
Grey



M3
Shiny sand

Body Finishes



01
White



15
Grey



04
Black



F5
Rust brown



07
Green



Other awards
Grand Prix du Design 2024
Good Design 2024



Visit our website
for more information



POLE AND WALL MOUNTED SYSTEMS



308 | ALBERO



310 | LANDER



312 | UFO




314 | PLATEA PRO




316 | LAVINIA



318 | WOW




320 | TWILIGHT
COPENHAGEN



322 | TWILIGHT KYOTO



323 | TWILIGHT CORTINA



324 | TWILIGHT CALGARY




326 | TWILIGHT JOBURG



328 | TWILIGHT BILBAO



330 | TWILIGHT
CANBERRA



331 | TWILIGHT PARIS



332 | TWILIGHT ODENSE



334 | FIAMMA



336 | LA VENARIA



338 | STREET



340 | BILLBOARD



Historical Centre - Spello, Italy — Product: Albero - H=5500 mm | Symmetric optic | White
Ph: Luca Petrucci



ALBERO

3000K | 4000K

Ø3280×5347 mm

up to 2725lm

up to 22lm/W

SM

CR180

3000K | 4000K

CR180

IP65 | IK08

Class I

ON/OFF

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



Visit our website
for more information





POLE MOUNTED

h=2,5 m
 2200K | 2700K | 3000K | 4000K
 272x126 mm
 up to 2000lm
 up to 120lm/W
 A60 | SC | ST1.5 | STCy0.5




POLE MOUNTED

h=4 m
 2200K | 2700K | 3000K | 4000K
 351x126 mm
 up to 4000lm
 up to 120lm/W
 A60 | STCy0.5 | ST1.5 | ST1U |
 SY1.5U | STWt1 | STWt1.5 | SC

Other versions available

Wall mounted luminaires p. 456

Bollards p. 432



2200K | 2700K | 3000K | 4000K

CRI80

IP66 | IK09

Class II, III

Zhaga (up or down)

Casambi

Midnight preset/DALI

DALI -2

Mounting accessories
to be ordered separately

Power supply
to be ordered separately

Intelligent Light Solutions

Smart controls:





Zhaga Socket

Quick BLE (Casambi)

Smart services:

Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown
-  07 Green



reddot winner 2017
best of the best

Other awards:
German Design Award 2019



Visit our website
for more information



Paseo and Pereda Gardens - Santander, Spain — Product: UFO Comfort pole mounted 423×423 mm | Grey/White
Ph: Gala Martínez Lopez



POLE TOP 423x423 mm

2200K | 3000K | 4000K | 5700K

up to 7000lm

up to 151lm/W

A60 | PS | ST1.0 | ST1.2 | ST1.5U | ST1U | STCy0.5 | STZI | STZr

CRI70



COMFORT POLE TOP 423x423 mm

3000K | 4000K

up to 2980lm

up to 93lm/W

SC

CRI80



COMFORT POLE TOP 634x634 mm

3000K | 4000K

up to 5380lm

up to 108lm/W

SC

CRI80



WALL MOUNTED 423x423 mm

2200K | 3000K | 4000K | 5700K

up to 7000lm

up to 151lm/W

A60 | PS | ST1.0 | ST1.2 | ST1.5U | ST1U | STCy0.5 | STZI | STZr

CRI70



COMFORT WALL MOUNTED 423x423 mm


3000K | 4000K

up to 2980lm

up to 93lm/W

SC

CRI80

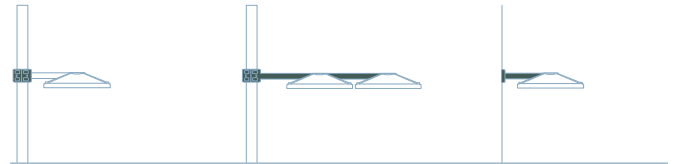

Horizontal arm for installation of 1 assembly

Horizontal arm for installation of 2 assemblies

Wall attachment

2200K | 3000K | 4000K | 5700K


CRI70 | CRI80

IP66 | IK07, IK08

Class II

DALI-2 | Midnight preset/DALI NFC

Mounting accessories to be ordered separately



Visit our website for more information



Palazzo Te park - Mantua, Italy — Product: Platea Pro - pole mounted 296×214 mm | Simple arm L=500 mm | Grey
Ph: Paolo Carlini



POLE TOP 296×214 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 4410lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



POLE TOP 406×276 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 12180lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



WALL MOUNTED 296×214 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 4410lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80



WALL MOUNTED 406×276 mm

2200K | 2700K | 3000K | 4000K | Tunable Warm

up to 12180lm

up to 140lm/W


STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

Other versions available

Floodlights p. 390

Pole and wall mounted multiple floodlights p. 352

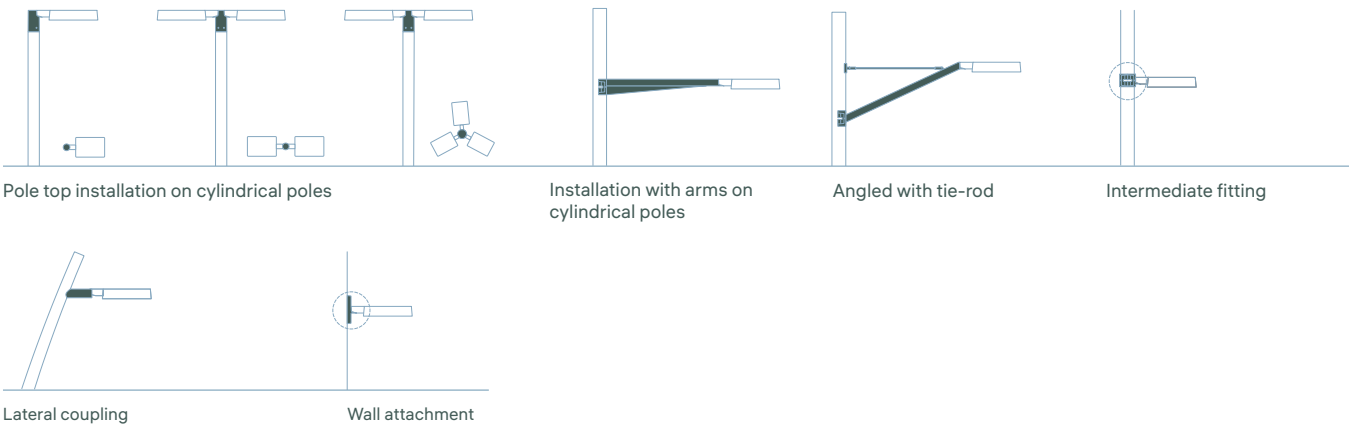

2200K | 2700K | 3000K | 4000K | Tunable White

CRI70 | CRI80

IP66 | IK08

Class II

DALI-2

Zhaga





Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

-  O1 White
-  O4 Black
-  15 Grey
-  F5 Rust brown



Visit our website for more information
 Platea Pro: pole versions new optics available from November 2026



Salaspils street - Salaspils, Latvia — Product: Lavinia - Pole mounted 617×333 mm | Arm 900 mm single | Black
Ph: Andrius Laucius



POLE TOP 617x333 mm

2200K | 2700K | 3000K | 4000K

up to 12000lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

WALL MOUNTED 617x333 mm

2200K | 2700K | 3000K | 4000K |


Tunable Warm

up to 12610lm

up to 140lm/W

STCy0.5 | ST1 | ST1.2 | ST1.5

CRI70 | CRI80

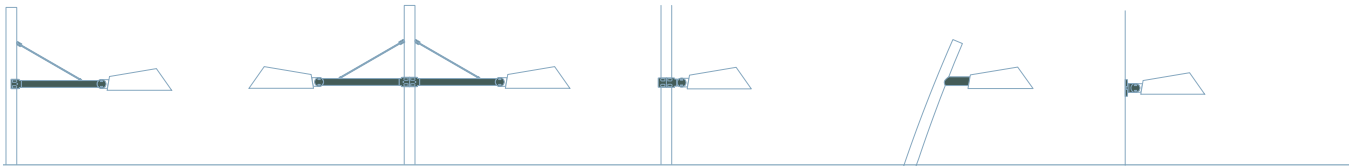


Single

Double

Intermediate fitting

Lateral coupling

Wall attachment

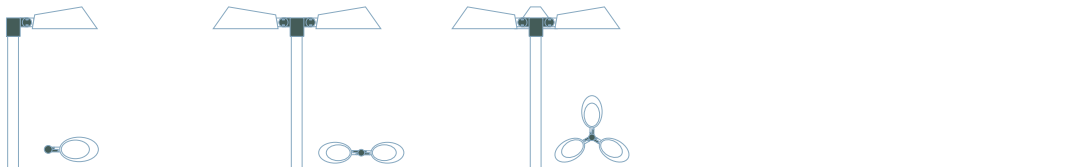

Single

Double

Triple

2200K | 2700K | 3000K | 4000K

CRI70 | CRI80

IP66 | IK09

Class II

DALI-2

Zhaga






Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown
-  H1 Deep grey



Other awards
Innovation Technology Design 2005



Visit our website
for more information
Lavinia: pole versions
new optics available from
November 2026



Pontresina, Swiss — Product: Wow - Pole Top 758×415mm | Grey
Ph: Paolo Carlini



POLE TOP 620×307 mm

3000K | 4000K

up to 10830lm

up to 130lm/W

A45 | A60 | ST0.8C | ST1.0 | ST1.2
| ST1C

CRI70



POLE TOP 758×415 mm

3000K | 4000K

up to 20980lm

up to 129lm/W

A45 | A60 | ST1.0 | ST1.2 | ST1C

CRI70



POLE TOP 807×505 mm


3000K | 4000K

up to 26940lm

up to 126lm/W

A45 | A60 | ST1.0 | ST1.2

CRI70

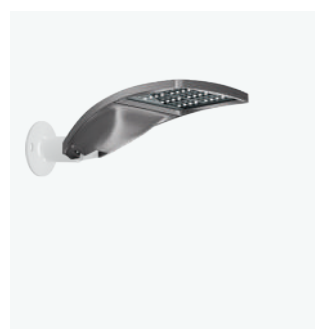

WALL MOUNTED 620×307 mm



3000K | 4000K

up to 10830lm

up to 130lm/W

A45 | A60 | ST0.8C | ST1.0 | ST1.2
| ST1C

CRI70

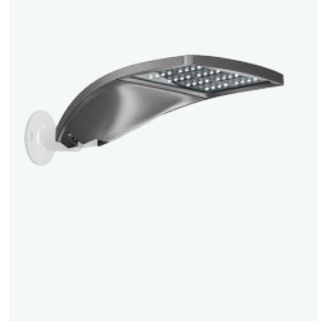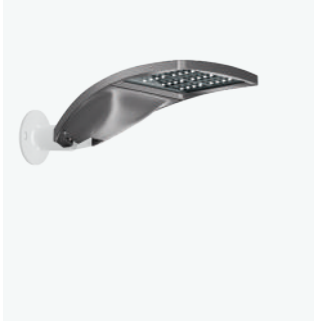


WALL MOUNTED 758×415 mm

3000K | 4000K
 up to 20980lm
 up to 129lm/W
 A45 | A60 | ST1.0 | ST1.2 | ST1C
 CRI70



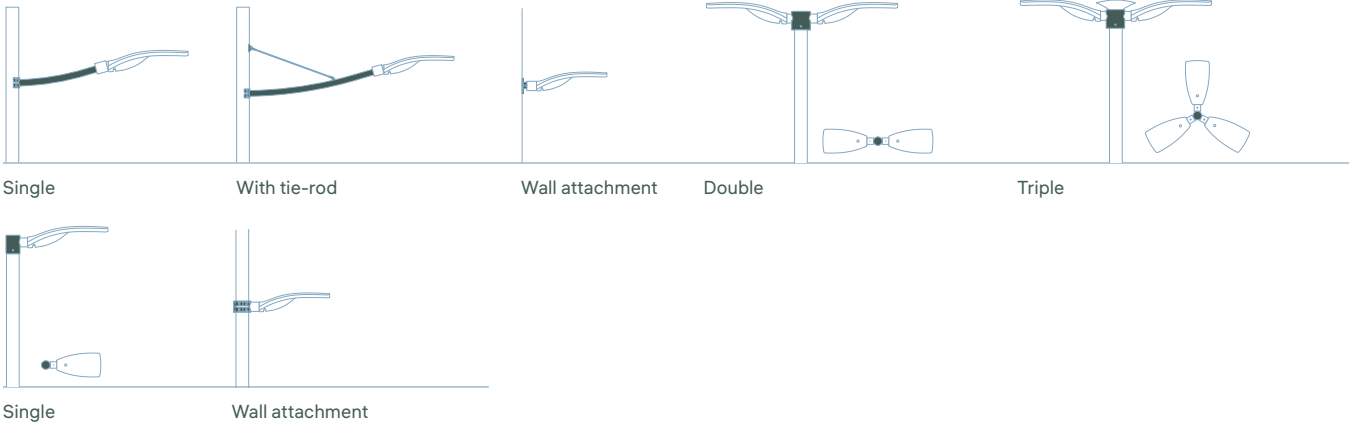

WALL MOUNTED 807×505 mm

3000K | 4000K
 up to 26940lm
 up to 126lm/W
 A45 | A60 | ST1.0 | ST1.2
 CRI70



3000K | 4000K
 CRI70
 IP67 | IK08
 Class II
 DALI-2
 Mounting accessories
 to be ordered separately

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown




Visit our website
 for more information

TWILIGHT COPENHAGEN

design iGuzzini



Park Sybiraków and Square of Pioneers - Kolobrzeg, Poland — Product: Twilight Copenhagen - Pole Top | Grey
Ph: Anna Rejmer

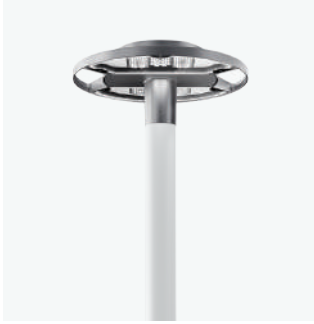

POLE TOP

2200K | 3000K | 4000K | 5700K

Ø460×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5
| ST1.5U | STWt1 | STWt1.5 | STZr |
STZl | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø460×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K

Ø460×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC |
Midnight preset/Zhaga

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket



Finishes

01
White



04
Black



15
Grey



F5
Rust brown



H1
Deep grey



Visit our website
for more information

TWILIGHT KYOTO

design iGuzzini



POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5
| ST1.5U | STWt1 | STWt1.5 | STZr |
STZl | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K

Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC | Midnight
preset/Zhaga

Mounting accessories to be ordered
separately


Diffuser to be ordered separately
(Ø583 mm)

Intelligent Light Solutions


Smart controls:

Zhaga Socket

Body finishes



Diffuser finishes



Visit our website
for more information

TWILIGHT CORTINA

design iGuzzini



POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×16 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K


Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

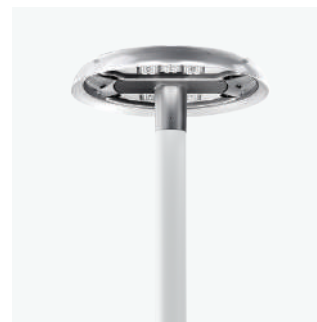

PMMA POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E

CRI70



PMMA WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



PMMA SPAN WIRE

2200K | 3000K | 4000K

Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC |
Midnight preset/Zhaga

Mounting accessories
to be ordered separately


Diffuser to be ordered
separately (Ø515 mm)

Intelligent Light Solutions


Smart controls:

Zhaga Socket


Body finishes



Diffuser finishes



Diffuser PMMA Finishes




Visit our website
for more information

TWILIGHT CALGARY

design iGuzzini



Public lighting relamping in Rende, Italy — Product: Twilight Calgary - Pole Top | Rust brown
Ph: Stefano Ferrando, Studio Vetroblu

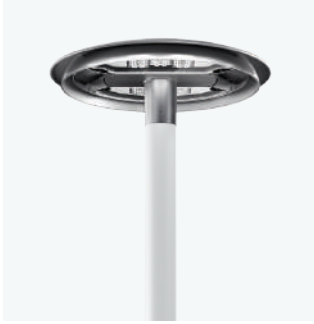

POLE TOP

2200K | 3000K | 4000K | 5700K

Ø470×76 mm

up to 14760lm

up to 146lm/W

STCy0.5 | ST1 | ST1U | ST1.2 | ST1.5 | ST1.5U | STWt1 | STWt1.5 | STZr | STZl | A60 | PS | SMC | E

CRI70



WALL MOUNTED

2200K | 3000K | 4000K

Ø470×76 mm × L=500 mm

up to 5730lm

up to 141lm/W

STCy0.5 | ST1.5 | A60

CRI70



SPAN WIRE

2200K | 3000K | 4000K

Ø470×76 mm

up to 11010lm

up to 159lm/W

STWrs | STWrw

CRI70

2200K | 3000K | 4000K | 5700K

CRI70

IP66 | IK08

Class II

Midnight preset/DALI NFC | Midnight preset/Zhaga

Mounting accessories to be ordered separately






Diffuser to be ordered separately (Ø583 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown
-  H1 Deep grey

Diffuser finishes

-  L2 White/Opal white
-  L3 White/Satin transparent
-  L4 Grey/Transparent black
-  L5 Grey/Satin transparent
-  L6 Deep grey/Transparent black
-  L7 Deep grey/Satin transparent
-  L8 Black/Transparent black
-  L9 Black/Satin transparent
-  M1 Rust brown/Transparent brown
-  M2 Rust brown/Satin transparent



Visit our website for more information



D3 Creek Park - Dubai, UAE — Product: Twilight Joburg - Pole Top | Black
Ph: Oliver Jackson



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

CRI65 | CRI80



WALL MOUNTED

3000K | 4000K

Ø323×190 mm × L=561 mm

up to 3920lm

up to 78lm/W

ST1.2

CRI70

2200K | 3000K | 4000K

CRI65 | CRI70 | CRI80

IP66 | IK10

Class II

Middle of the night

DALI | DALI-2

NEMA

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown



Visit our website
for more information

TWILIGHT BILBAO

design iGuzzini



LUISS school building - Rome, Italy — Product: Twilight Bilbao - Pole Top | Grey
Ph: Michele Nastasi



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

CRI65 | CRI80



PMMA POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 3920lm

up to 78lm/W

ST1.2

CRI65 | CRI80



WALL MOUNTED

3000K | 4000K

Ø323×190 mm × L=561 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

CRI70



PMMA WALL MOUNTED

3000K | 4000K

Ø323×190 mm × L=561 mm

up to 3920lm

up to 78lm/W

ST1.2

CRI70

2200K | 3000K | 4000K

CRI65 | CRI70 | CRI80

IP66 | IK10

Class II

Middle of the night

DALI | DALI-2

NEMA

Mounting accessories to be ordered separately

Diffuser to be ordered separately (Ø500 mm)

Intelligent Light Solutions


Smart controls:

Zhaga Socket

Finishes



Diffuser finishes



Visit our website for more information

TWILIGHT CANBERRA

design iGuzzini



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

CRI65 | CRI80

WALL MOUNTED

3000K | 4000K

Ø323×190 mm × L=561 mm

up to 3920lm

up to 78lm/W

ST1.2

CRI70

2200K | 3000K | 4000K

CRI65 | CRI70 | CRI80

IP66 | IK10

Class II

Middle of the night | DALI | DALI-2 | NEMA

Mounting accessories to be ordered separately


Diffuser to be ordered separately (Ø650 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes



Diffuser finishes



Visit our website for more information

TWILIGHT PARIS

design iGuzzini



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

CRI65 | CRI80

WALL MOUNTED

3000K | 4000K

Ø323×190 mm × L=561 mm

up to 3920lm

up to 78lm/W

ST1.2

CRI70

2200K | 3000K | 4000K

CRI65 | CRI70 | CRI80

IP66 | IK10

Class II

Middle of the night

DALI | DALI-2

NEMA

Mounting accessories
to be ordered separately

Diffuser to be ordered
separately (Ø498 mm)

Intelligent Light Solutions

Smart controls:

Zhaga Socket

Body finishes



01
White



04
Black



15
Grey



F5
Rust brown

Diffuser Finish



14
Gold



Visit our website
for more information

TWILIGHT ODENSE

design iGuzzini



Park Sybiraków and Square of Pioneers - Kolobrzeg, Poland — Product: Twilight Odense - Pole Top | Grey
Ph: Anna Rejmer



POLE TOP

2200K | 3000K | 4000K

Ø323×190 mm

up to 4590lm

up to 102lm/W

E | SM | ST0.5 | ST1.2

Outgoing cable

2200K | 3000K | 4000K

CR165 | CR180

IP66 | IK10

Class II

Middle of the night

DALI | DALI-2

NEMA


Mounting accessories
to be ordered separately

Diffuser to be ordered
separately (Ø650 mm)

Body finishes



Diffuser finishes



Visit our website
for more information



Residence Litta - Milan, Italy — Product: Fiamma - Pole Top | Grey
Ph: Marco Beck Peccoz



POLE TOP

3000K

Ø506×3600 mm

up to 4300lm

up to 85lm/W

SM

Complete with pole

CRI80



PENDANT

3000K

Ø506×1337 mm

up to 4300lm

up to 85lm/W

SM

Complete with electronic power supply

CRI80



WALL MOUNTED

3000K

Ø506×1030 mm

up to 4300lm

up to 85lm/W

SM

Complete with electronic power supply

CRI80

3000K

CRI80

IP66 | IK08

Class I

DALI-2

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



Visit our website for more information



Sharjah Mosque - Sharjah, United Arab Emirates — Product: La Venaria
Ph: Ales Photography



LA VENARIA

4000K

Ø1411×9300 mm

up to 27000lm

up to 79lm/W

A | SM

Complete with pole

CR180

4000K

CR180

IP67 | IK07

Class II

ON/OFF



Finish

15
Grey



Visit our website
for more information





POLE TOP 416×211 mm

2200 K | 2700 K | 3000 K | 4000 K | 5700 K

up to 5790lm

up to 141lm/W

A60 | ST1.0 | ST1.5 | ST1.5U | ST1U | STCy0.5 | STWt1 | STWt1.5 | STZI | STZr

CRI70 | CRI80



POLE TOP 529×268 mm

2200 K | 2700 K | 3000 K | 4000 K | 5700 K

up to 13620lm

up to 155lm/W

A60 | ST1.0 | ST1.2 | ST1.5 | STCy0.5 | STF1 | STZI | STZr

CRI70 | CRI80



POLE TOP 650×328 mm


2200 K | 2700 K | 3000 K | 4000 K | 5700 K

up to 27100lm


up to 157lm/W

A60 | ST1.0 | ST1.2 | ST1.5 | STZI | STZr


CRI70 | CRI80




Single




With tie-rod




Wall attachment




Double



Triple



Single



With intermediate fitting tie-rod

2200 K | 2700 K | 3000 K | 4000 K | 5700 K

CRI70 | CRI80

IP66, IP67 | IK07, IK09

Class II

ON/OFF

DALI-2

Midnight | Midnight preset/DALI NFC | Midnight preset/NEMA | Midnight preset

Zhaga

Mounting accessories to be ordered separately

Finishes



Intelligent Light Solutions

Smart controls:

Zhaga Socket

Nema Socket



Visit our website for more information

BILLBOARD

design iGuzzini





460x209 POLE TOP

3000K | 4000K

450x209 mm

up to 9760lm

up to 163lm/W

ASF | STM | STW

CRI70



516x259 POLE TOP

3000K | 4000K

516x259 mm

up to 21.720lm

up to 135lm/W

ASF | STM | STW

CRI70

3000K | 4000K

CRI70

IP66 | IK10

Class II

Middle of the night

Midnight Preset / Zhaga

Mounting accessories
to be ordered separately

Finish



U9
Grey (RAL 7010)



Visit our website
for more information



RESTAURANT

← Reception


POLE AND WALL MOUNTED MULTIPLE FLOODLIGHTS




344 | NEWFO INOUT



345 | AGORÁ



348 | PALCO INOUT



350 | WOODY



352 | PLATEA PRO



354 | IPRO



356 | LINGOTTO



MULTI NEWFO INOUT ON POLE

2200K | 2700K | 3000K | 3500K
| 4000K | RGBW | Tunable White |
Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC
| S+HC | M+HC | F+HC | WF+HC |
VWF+HC | Blade

CRI80 | CRI90



MULTI NEWFO INOUT WALL MOUNTED

2200K | 2700K | 3000K | 3500K
| 4000K | RGBW | Tunable White |
Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC
| S+HC | M+HC | F+HC | WF+HC |
VWF+HC | Blade

CRI80 | CRI90



MULTI NEWFO INOUT WITH MINIMAL AND CONNECTED POLE

2200K | 2700K | 3000K | 3500K
| 4000K | RGBW | Tunable White |
Tunable Warm

Ø125 | Ø162 | Ø176 mm

up to 6000lm


up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC
| S+HC | M+HC | F+HC | WF+HC |
VWF+HC | Blade


CRI80 | CRI90

Other versions available


Floodlights p. 378




Newfo InOut
Ø76 mm




Newfo InOut
Ø98 mm



Newfo InOut
Ø125 mm



Newfo InOut
Ø125 mm



Newfo InOut
Ø176 mm



Newfo InOut
Ø205 mm

2200K | 2700K | 3000K | 3500K
| 4000K | RGBW | Tunable White |
Tunable Warm

CRI80 | CRI90

IP66 | IK07 | IK08

Class II

DALI-2 | 1-10V | DMX-RDM

Mounting accessories
to be purchased separately

DALI-2 | Casambi | DMX

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification



Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green



Raster Finishes

01 White

04 Black

15 Grey

F5 Rust brown

07 Green

F7 Glossy copper

H3 Glossy black

M3 Glossy sand

M4 Glossy lead

M5 Glossy urban
bronze

I9 Satin transparent

Decorative frame to be
ordered separately



Visit our website
for more information

Newfo InOut: 3 sizes
(Ø76/98/125 mm)
available from
April 2026
Newfo InOut: 3 sizes
(Ø125/152/176 mm)
available from
March 2027



Massa Marittima town centre, Italy — Product: Agorà Ø368 mm compact, Black
Ph: Paolo Carlini



MULTI AGORÀ ON POLE

2200K | 2700K | 3000K | 4000K

Ø313×363 | Ø368×421 |

Ø516×571 mm

up to 39904lm

up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1
| STCy0.5 | STWt1.5

CRI65 | CRI80



MULTI AGORÀ WITH MINIMAL AND CONNECTED POLE

2200K | 2700K | 3000K | 4000K

Ø204×242 | Ø254×303 | Ø313×363 |


Ø368×421 | Ø516×571 mm

up to 39904lm

up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1
| STCy0.5 | STWt1.5

CRI65 | CRI80

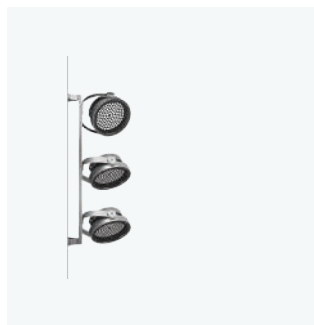

MULTI AGORÀ WALL MOUNTED

2200K | 2700K | 3000K | 4000K

Ø313×363 | Ø368×421 |

Ø516×571 mm

up to 39904lm


up to 130lm/W

ESS | SS | S | F | WF | WW | A60 | ST1
| STCy0.5 | STWt1.5


CRI65 | CRI80

Other versions available


Floodlights p. 380




Agorà Ø204 mm
slim




Agorà Ø254 mm
slim



Agorà Ø254 mm
compact



Agorà Ø313 mm
slim



Agorà Ø313 mm
compact




Agorà Ø368 mm
slim



Agorà Ø368 mm
compact



Agorà Ø516 mm
slim



Agorà Ø516 mm
compact



Agorà Ø516 mm
compact CoB

2200K | 2700K | 3000K | 4000K

CRI65 | CRI80

IP66 | IK08

Class I, II

DALI-2

Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01
White

04
Black

15
Grey

F5
Rust brown



Other awards

Good Design Awards 2023

BrightStar Awards 2023

Compasso d'Oro Internazionale 2025



Visit our website
for more information



“Il Tulipano” complex –Terni, Italy — Product: Agorà - Super Spot optic | Ø368×421 mm | Grey
Ph: Luca Petrucci



Passetto staircase – Ancona, Italy — Product: Palco InOut - Minimal and connected pole | Wide Flood | Black
Ph: Fabio Di Carlo



MULTI PALCO INOUT ON POLE

2700K | 3000K | 4000K
 Ø83 | Ø119 | framer Ø116 |
 Ø137 | Ø153 mm
 Ø137 mm, Ø153 mm"
 up to 6715lm
 up to 117lm/W
 SS | S | M | F | WF | VWF | Framer
 2 PG
 CRI80



MULTI PALCO INOUT WALL MOUNTED

2700K | 3000K | 4000K
 Ø83 | Ø119 | Ø137 | Ø153 mm
 up to 6715lm
 up to 117lm/W
 SS | S | M | F | WF | VWF
 2 PG
 CRI80




MULTI PALCO INOUT WITH MINIMAL AND CONNECTED POLE


2700K | 3000K | 4000K
 Ø83 | Ø119 | framer Ø116 |
 Ø137 | Ø153 mm
 up to 8585lm
 up to 106lm/W
 SS | S | M | F | WF | VWF Framer
 Outgoing cable
 CRI80

Other versions available


Floodlights p. 384




Palco InOut
 Ø30 mm




Palco InOut
 framer Ø30 mm



Palco InOut
 Ø49 mm



Palco InOut
 Ø83 mm



Palco InOut
 Ø119 mm



Palco InOut
 Ø119 mm



Palco InOut
 framer Ø116 mm



Palco InOut
 Ø137 mm




Palco InOut
 Ø153 mm




Palco InOut
 framer Ø153 mm


Bollards p. 440



Palco InOut
 Ø30 mm



Palco InOut
 Framer Ø30 mm



Palco InOut
 Ø49 mm

2700K | 3000K | 4000K
 CRI80
 IP66 | IK07
 Class II, III
 ON/OFF
 DALI-2
 Mounting accessories
 to be purchased separately

Intelligent Light Solutions

Smart controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:
 Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown

Lux Awards 2019
 Premims Delta Bronzo 2020



Visit our website
 for more information



Stasjonsallmenningen, Nordenga Bridge and Sørrenga -Bjørvika Oslo — Product: Woody - Minimal and connected pole | Ø 260 | Grey
Ph: Tomasz Majewski



MULTI WOODY ON POLE

3000K | 4000K | RGB


Ø260 | Ø315 | Ø380 mm

up to 7000lm

up to 123lm/W

S | F | WF | ST1 | ST1.2

CRI70 | CRI80

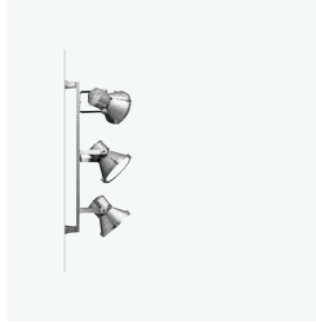

MULTI WOODY WALL MOUNTED

3000K | 4000K | RGB

Ø260 | Ø315 | Ø380 mm

up to 7000lm

up to 123lm/W

S | F | WF | ST1 | ST1.2

CRI70 | CRI80



MULTI WOODY WITH MINIMAL AND CONNECTED POLE

3000K | 4000K | RGB

Ø260 mm | Ø315 mm

up to 11158lm

up to 121lm/W

S | F | WF | ST 1 | ST 1.2

CRI70 | CRI80

Other versions available

Floodlights p. 388



Maxi Woody Compact
Ø260 mm



Maxi Woody
Ø315 mm



Maxi Woody
Ø380 mm

3000K - 4000K - RGB
CRI70 / CRI80
IP67 | IK08
Class II
DALI-2 | 1-10V | DMX-RDM
Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI


Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification



Other awards
Intel Design Award 2003



Visit our website
for more information

PLATEA PRO

design Jean-Michel Wilmotte



Copenhill-Copenhagen, Denmark — Product: Platea Pro - Wall mounted | 296×214 mm | Grey
Ph: Tomasz Majewski



MULTI PLATEA PRO ON POLE

3000K | 4000K | RGBW 4000K

296×214 mm

up to 4410lm

up to 133lm/W

SS | S | F | WF | E | WW | A45

CRI70 | CRI80



MULTI PLATEA PRO WALL MOUNTED

3000K | 4000K | RGBW 4000K

296×214 mm

up to 4410lm

up to 133lm/W

SS | S | F | WF | E | WW | A45

CRI70 | CRI80

Other versions available

Floodlights p. 390

Pole and wall mounted systems p. 314



Floodlight
296×214 mm



Floodlight
406×276 mm



Platea Pro
on pole
296×214 mm



Platea Pro
on pole
406×276 mm



Platea Pro
wall mounted
296×214 mm



Platea Pro
wall mounted
406×276 mm

3000K | 4000K | RGBW 4000K

CRI70 | CRI80

IP66 | IK08

Class II

DMX-RDM

DALI-2

Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



Visit our website
for more information
Platea Pro: pole versions
new optics available
from November



“Las Llanas” - Burgos, Spain — Product: iPro - Wall mounted and Minimaland connected pole | 192×192×200 mm| Grey
Ph: David Cardelús



MULTI IPRO ON POLE

3000K | 4000K

192x192x200 mm

up to 3280lm

up to 105lm/W

S | M

CRI80



MULTI IPRO WALL MOUNTED

3000K | 4000K

192x192x200 mm

up to 3280lm

up to 105lm/W

S | M

CRI80



MULTI IPRO WITH MINIMAL AND CONNECTED POLE

3000K | 4000K | RGB | RGBW
4000K | Tunable white

192x192x200 mm

up to 6609lm

up to 111lm/W

A60 | F | M | S | SS | ST1.0 | VWF | WF

CRI70 | CRI80

Other versions available

Floodlights p. 392

Lighting effect luminaires p. 482



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm



iPro Wall lighting effects

Wall mounted luminaires p. 454

Ceiling mounted luminaires p. 474




iPro 51 mm wall mounted



iPro 81 mm wall mounted



iPro 132 mm wall mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 155 mm wall mounted



iPro 192 mm wall mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted

3000K | 4000K | RGB | RGBW
4000K | Tunable white

CRI70 | CRI80

IP66 | IK07

Class I, II

DMX-RDM

DALI-2

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Quick DMX

Master Pro Evo

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



reddot winner 2010
best of the best



Visit our website for more information





MULTI LINGOTTO ON POLE

2200K | 3000K | 4000K
 270x240 mm
 up to 5380lm
 up to 128lm/W
 A60 | ST1.0 | ST1.5 | STCy0.5
 Outgoing cable / through wiring
 CRI70 | CRI80



MULTI LINGOTTO WITH MINIMAL AND CONNECTED POLE

2200K | 3000K | 4000K
 270x240 mm
 up to 5380lm
 up to 128lm/W
 A60 | ST1.0 | ST1.5 | STCy0.5
 Outgoing cable
 CRI70 | CRI80

Other versions available

Floodlights p. 394



Lingotto without base



Lingotto with base



Lingotto with external box

2200K | 3000K | 3500K | 4000K
 CRI65 | CRI70 | CRI80
 IP20, IP66 | IK06, IK07
 Class I, II
 DALI-2
 Mounting accessories to be purchased separately

Intelligent Light Solutions






Smart controls:

Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown
-  73 Grey/Yellow



Visit our website for more information



POLES



360 | WOODEN POLE




361 | CONICAL WITH
CURVED POLE



362 | POLE WITH
CURVED ARM



363 | CYLINDRICAL POLE



364 | TAPERED POLE



365 | CONICAL POLE



366 | MINIMAL AND
CONNECTED POLE

WOODEN POLE

design iGuzzini



CYLINDRICAL

Ø140×3000 | Ø140×4000 |
Ø140×5000 | Ø140×6000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
Ø140	Ø76	3000	400×85	FL FM FN
Ø140	Ø76	4000	400×85	FL FM FN
Ø140	Ø76	5000	400×85	FL FM FN
Ø140	Ø76	6000	400×85	FL FM FN



CONICAL

Ø90×3000 | Ø90×4000 |
Ø90×5000 | Ø90×6000 |
Ø100×6000 | Ø100×6000 |
Ø100×8000 | Ø120×10000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
Ø140/Ø90	Ø76	3000	400×85	FL FM FN
Ø140/Ø90	Ø76	4000	400×85	FL FM FN
Ø140/Ø90	Ø76	5000	400×85	FL FM FN
Ø148/Ø90	Ø76	6000	400×85	FL FM FN
Ø168/Ø100	Ø76	6000	400×85	FL FM FN
Ø168/Ø100	Ø76	7000	400×85	FL FM FN
Ø193/Ø100	Ø76	8000	485×85	FL FM FN
Ø219/Ø120	Ø76	10000	500×100	FL FM FN



CONICAL WITH SQUARE BASE

Ø114×4000 | Ø114×5000 |
Ø140×6000 | Ø140×6000 |
Ø140×7000 | Ø168×8000 |
Ø168×10000 mm

Base / head diameter	Coupling diameter	Height	Lid dimensions	Flange drilling
140×140/Ø114	Ø76	4000	400×85	FL FM FN
140×140/Ø114	Ø76	5000	400×85	FL FM FN
140×140/Ø114	Ø76	6000	400×85	FL FM FN
160×160/Ø140	Ø76	6000	400×85	FL FM FN
160×160/Ø140	Ø76	7000	400×85	FL FM FN
180×180/Ø168	Ø76	8000	400×85	FL FM FN
200×200/Ø168	Ø76	10000	500×100	FL FM FN

Finishes



M8
Cinnamon/Silver grey



M9
Cinnamon/Sand grey



N1
Cinnamon/Graphite grey



N2
Saffron/Silver grey



N3
Saffron/Sand grey



Q4
Saffron/Graphite grey




N5
Onyx/Silver grey



N6
Onyx/Sand grey




N7
Onyx/Graphite grey



Visit our website
for more information

CONICAL CURVED POLE

design iGuzzini




- Finishes**
- 15 Grey
 - 74 Grey/Black

WITH PLATE AND INTERMEDIATE SUPPORT

Ø60×6000 mm | Ø60×8000 mm


Plate: Ø147-70 mm | Ø172-70 mm

Plate and intermediate support:
Ø147-70 mm | Ø172-70 mm

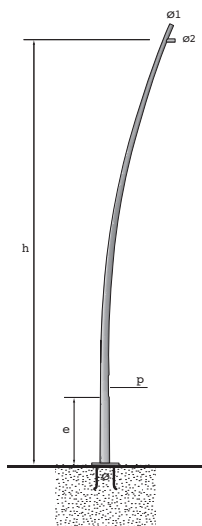

POLE WITH PLATE

Base / head diameter (Ø / Ø1)	Coupling diameter (Ø2)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
147/70	60	6000	3	72	400×90	800
172/70	60	8000	3	94	400×90	800

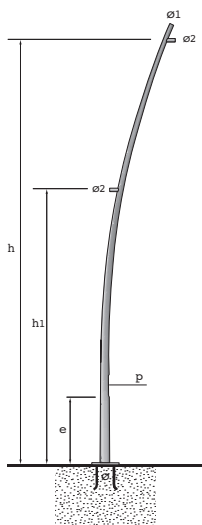

POLE WITH PLATE AND INTERMEDIATE SUPPORT


Base / head diameter (Ø / Ø1)	Coupling diameter (Ø2)	Height (h)	Height (h1)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
147/70	60	6000	4000	3	73	400×90	800
172/70	60	8000	4000	3	95	400×90	800



Visit our website for more information

POLE WITH CURVED ARM

design iGuzzini



POLE WITH CURVED ARM

Ø76×6700 mm | Ø102×8700 mm

With double arm:


Ø76×6700 mm | Ø76×8700 mm

With plate:

Ø76×6700 mm | Ø76×8700 mm

With plate and double arm:

Ø76×6700 mm | Ø76×8700 mm

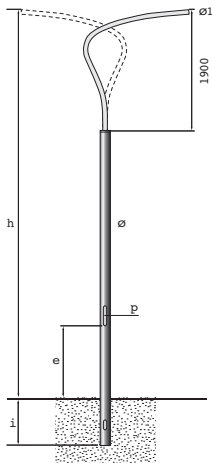


BURIED POLE WITH ARM

Diameter pole (Ø)	Coupling diameter (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	800	3	94	310×95	1000
		8700	1000	4	148	310×95	1000

BURIED POLE WITH 2 ARMS

Diameter pole (Ø)	Coupling diameter (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	800	3	118	310×95	1000
		8700	1000	4	172	310×95	1000

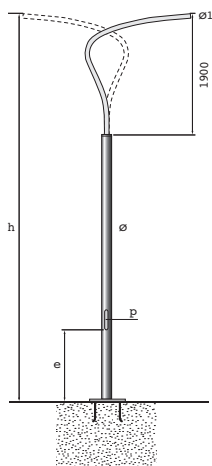

POLE WITH PLATE WITH ARM

Diameter pole (Ø)	Coupling diameter (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	3	97	310×95	1000
		8700	4	157	310×95	1000

POLE WITH PLATE WITH 2 ARMS

Diameter pole (Ø)	Coupling diameter (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
160	76	6700	3	121	310×95	1000
		8700	4	181	310×95	1000



Visit our website for more information

CYLINDRICAL POLE

design iGuzzini



Finishes
15
Grey

BURIED / WITH PLATE


Ø60×3000 | Ø60×4000 |
Ø76×4000 | Ø102×4000 |
Ø102×5600 | Ø102×6800 |
Ø102×8000 | Ø120×5600 |
Ø120×8000 | Ø120×10000 mm

With plate:
Ø76×4000 | Ø102×5000 |
Ø120×5000 | Ø120×7000 mm

WITH SHANK BURIED / WITH PLATE


Ø76×4000 | Ø102×6000 |
Ø120×7000 | Ø120×8000 mm

With plate: Ø120×6000 |
Ø120×7000 | Ø120×8000 mm

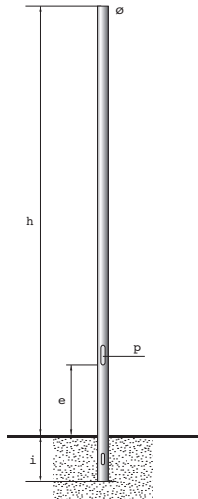

BURIED POLE

Diameter pole (Ø)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Hatch dimensions (p)	h from ground of lid (e)
60	2500	500	3	14	-	1064
	3500	500	5	29	-	1064
76	4000	600	4	35	132×38	1000
102	3500	500	3	30	186×45	1064
	5000	600	3	43	186×45	1064
	6000	800	4	66	186×45	1000
	7000	1000	4	78	186×45	1000
120	5000	600	3	52	310×95	1000
	7000	1000	4	97	310×95	1000
	9000	1000	4	120	186×45	1000

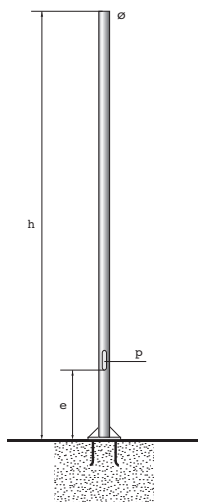

POLE WITH PLATE

Diameter pole (Ø)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
76	4000	4	40	132×38	1000
102	5000	3	49	186×45	1000
120	5000	3	55	310×95	1000
	7000	4	93	310×95	1000



Visit our website
for more information

TAPERED POLE

design iGuzzini



Finishes
15
Grey


BURIED / WITH PLATE

Ø102×8000 | Ø120×10000 |
Ø120×11000 | Ø120×12800 mm

With plate:
Ø159×6000 | Ø159×7000 |
Ø159×8000 | Ø120×9000 |
Ø120×10000 | Ø120×12000 mm


IP44 | IK08

Class II

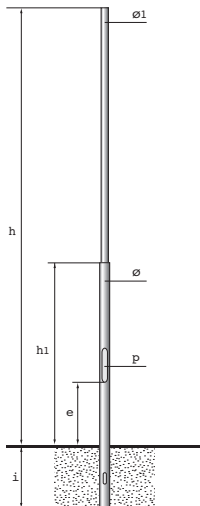

BURIED TAPERED POLE

Diameter pole (Ø / Ø1)	Height above ground (h)	Height (h1)	Height to be buried holes (i)	Thickness (Ø / Ø1)	Weight (kg)	Hatch dimensions (p)	h from ground of lid (e)
127/102	8000	3000	1000	4/4	102	186×45	1000
194/120	9000	3200	1000	4/3	152	310×95	1000
	9000	3200	1000	4/3	152	310×95	1000
	10000	3200	1000	4/3	164	310×95	1000
	12000	5200	800	4/4	212	400×90	600

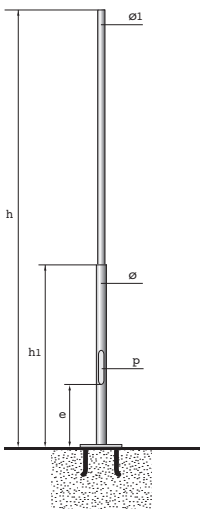

TAPERED POLE WITH PLATE

Diameter pole (Ø / Ø1)	Height (h)	Height (h1)	Thickness (Ø / Ø1)	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
159/102	6000	2000	3/3	91	310×95	1000
	7000	2000	4/3	111	310×95	1000
	8000	3000	4/4	133	310×95	1000
194/120	9000	3200	4/3	163	310×95	1000
	9000	3200	4/3	163	310×95	1000
	10000	3200	4/3	174	310×95	1000
	12000	5200	4/4	222	400×90	600



Visit our website
for more information

CONICAL POLE

design iGuzzini



Finishes
15
Grey


BURIED / WITH PLATE

Ø60×4600 | Ø60×7800 |
Ø60×9800 mm

With plate:
Ø60×7000 | Ø60×9000 mm


Base:
Ø106-60 | Ø138-60 | Ø158-60 mm

Base with plate:
Ø130-60 | Ø150-60 mm

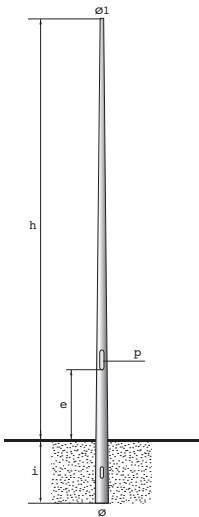

BURIED POLE

Base diameter (Ø)	Diameter of head (Ø1)	Height above ground (h)	Height to be buried holes (i)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
106	60	4000	600	3	29	186×45	800
138	60	7000	800	3	56	186×45	1000
158	60	9000	800	3	77	186×45	1000

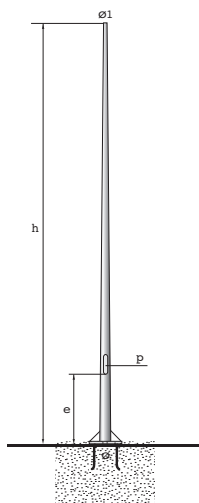

POLE WITH PLATE

Base diameter (Ø)	Diameter of head (Ø1)	Height (h)	Thickness	Weight (kg)	Lid dimensions (p)	h from ground of lid (e)
100	60	4000	3	39	186×45	800
130	60	7000	3	62	186×45	1000
150	60	9000	3	104	186×45	1000



Visit our website
for more information

MINIMAL AND CONNECTED POLE

design iGuzzini



MINIMAL AND CONNECTED POLE

Ø102×5600 | Ø102×7800 |
Ø120×9800 | Ø120×13000 mm

Ø102×5000 | Ø102×7000 |
Ø120×9000 | Ø120×12000 mm

With Bluetooth antenna:
Ø102×5600 | Ø102×7800 |
Ø120×9800 | Ø120×13000 mm

With Bluetooth antenna:
Ø102×5000 | Ø102×7000 |
Ø120×9000 | Ø120×12000 mm

MINIMAL AND CONNECTED POLE WITH PLATE

Base / head diameter	Coupling diameter	Height	Thickness	Weight	Lid dimensions	Flange drilling
Ø120 / Ø76	Ø76	3500	3	34	310×95	FB FJ
Ø159 / Ø102	Ø102	5000	3	59	310×95	FA FB FC FD
Ø159 / Ø102	Ø102	7000	4	96	310×95	FA FC FD FE FF FG
Ø194 / Ø120	Ø120	9000	4	145	310×95	FC FD FE FF FG FH
Ø219 / Ø120	Ø120	12000	4	199	310×95	FB FC FD FE FG FI

MINIMAL AND CONNECTED BURIED PLE

Base / head diameter	Coupling diameter	Height	Height above ground	Thickness	Weight	Lid dimensions	Flange drilling
Ø120 / Ø76	Ø76	4100	3500	3	34	310×95	FB FJ
Ø159 / Ø102	Ø102	5600	5000	3	59	310×95	FA FB FC FD
Ø159 / Ø102	Ø102	7800	7000	4	96	310×95	FA FC FD FE FF FG
Ø194 / Ø120	Ø120	9800	9000	4	145	310×95	FC FD FE FF FG FH
Ø219 / Ø120	Ø120	12600	12000	4	199	310×95	FB FC FD FE FG FI

FLANGE DRILLING

Vertical



FA (4 products)
FE (5 products)
FI (9 products)
FH (7 products)

Horizontal



FB (4 products)
FC (8 products)
FF (12 products)

Elica 90°



FD (4 products)

Elica 60°



FG (6 products)
FK (5 products)

Simmetrical 120°




FJ (3 products)

Steel Flange 71×115 mm

Double door 310×95 mm

Finishes



Visit our website
for more information



Product: Minimal and connected pole



LINEAR SYSTEMS



370 | LINEALUCE 27



372 | LINEALUCE 47



374 | UNDERScore INOUT



Passetto staircase – Ancona, Italy — Product: Linealuce 27 - surface Full Remote | Grey
Ph: Fabio Di Carlo



SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



SPAN WIRE FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80


ACCESSORIES

- 1 Honeycomb Louvre
- 2 Transversal
- 3 Diffuser
- 4 Longitudinal Louvre
- 5 Visor + Transversal Louvre
- 6 Visor
- 7 Elliptical Filter
- 8 Ikio Frame



Other versions available

Pendants p. 144 / Ceiling mounted luminaires p. 472 / Recessed in-ground luminaires p. 406

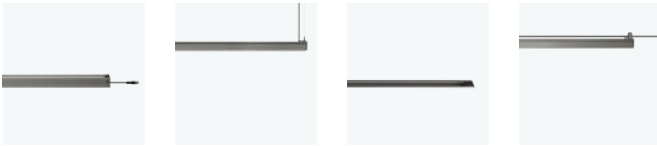

Linealuce 27
surface Full
Remote

Linealuce 27
pendant Full
Remote

Linealuce 27
recessed Full
Remote

Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK09

Walkable (1000kg)

Class III

PWM

External

Mounting accessories
to be purchased separately

Power supplies
to be purchased separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



Other awards
Grand Prix du Design (Gold) 2024
BrightStar Awards 2024



Visit our website
for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Caixa Forum –Barcelona, Spain — Product: Linealuce 47 - Recessed remote | Grey
Ph: Artel Ramirez



SURFACE REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 96lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

47×83 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5530lm

up to 88lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB |
RGBW 4000K | Tunable White

102×52 mm

340 | 611 | 908 | 1205 | 1502 mm

up to 5146lm

up to 86lm/W

WGS | WGM | WGWF

CRI80



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 89lm/W

WGS | WGM | WGWF | WF

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm


up to 84lm/W

WGS | WGM | WGWF | WF

CRI80

ACCESSORIES

- 1 Longitudinal louvre
- 2 Transversal louvre
- 3 Honeycomb louvre
- 4 Elliptical filter 25° × 45°
- 5 Elliptical filter 40° × 85°
- 6 Asymmetric external screen
- 7 Symmetric external screen

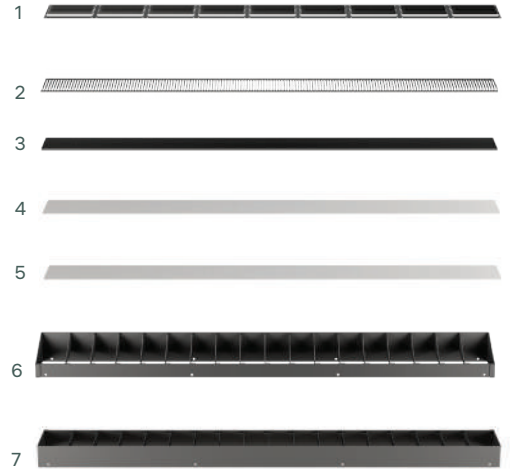

Other versions available

Ceiling mounted luminaires p. 471



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce47
recessed
Remote



Linealuce
47 recessed
Integral



Linealuce47
recessed
Remote



Linealuce
47 recessed
Integral

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417

2700K | 3000K | 4000K | RGB |
RGB-W 3000K | RGB-W 4000K |
Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



Visit our website
for more information

UNDERScore INOUT

design iGuzzini



Attocube Systems AG office building - Haar, Germany — Product: Underscore InOut - Top Bend 16 mm | White



SIDE BEND 10 mm

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73lm/W

GL

CRI80



SIDE BEND 16 mm

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78lm/W

GL

CRI80



TOP BEND 16 mm

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601lm

up to 74lm/W

GL

CRI80



PIXEL TOP BEND 16 mm

RGBW

L from 337 mm to 7004 mm

up to 1281lm

up to 25lm/W

GL (addressable every 83 mm)

Other versions available

Lighting effect luminaires p. 484



Underscore
InOut Side Bend
10 mm



Underscore
InOut Side Bend
16 mm



Underscore
InOut Top Bend
16 mm



Underscore
InOut Top Bend
16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification



Finishes

01
White


ArchiExpo i-NOVO Awards 2016




Visit our website for more information




FLOODLIGHTS




378 | NEWFO INOUT



380 | AGORÁ



384 | PALCO INOUT



388 | WOODY



390 | PLATEA PRO



392 | IPRO




394 | LINGOTTO



396 | LINEALUCE 27



397 | LINEALUCE 47



Ø76 mm


2200K | 2700K | 3000K | 3500K | 4000K

up to 850 lm

up to 90lm/W

M | F | WF | M+HC | F+HC | WF+HC | Blade

CRI80 | CRI90



Ø98 mm


2200K | 2700K | 3000K | 3500K | 4000K |

up to 1500lm

up to 100lm/W

S | M | F | WF | VWF | S+HC | M+HC | F+HC | WF + HC | VWF + HC | Blade

CRI80 | CRI90



Ø125 mm

2200K | 2700K | 3000K | 3500K | 4000K | RGBW | Tunable White | Tunable Warm

up to 3000lm

up to 120lm/W

SS | S | M | F | WF | VWF | SS+HC | S+HC | M+HC | F+HC | WF+HC | VWF+HC | Blade

CRI80 | CRI90



Ø176 mm

2200K | 2700K | 3000K | 3500K
 | 4000K | RGBW | Tunable White |
 Tunable Warm

up to 4000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC
 | S+HC | HC | F+HC | WF+HC |
 VWF+HC

CRI80 | CRI90



Ø205 mm

2200K | 2700K | 3000K | 3500K
 | 4000K | RGBW | Tunable White |
 Tunable Warm

up to 6000lm

up to 125lm/W

SS | S | M | F | WF | VWF | SS+HC
 | S+HC | M+HC | F+HC | WF+HC |
 VWF+HC

CRI80 | CRI90

Other versions available

Pole and wall mounted multiple floodlights p. 344



Multi Newfo
InOut on pole



Multi Newfo
InOut wall
mounted



Multi Newfo
InOut with
minimal and
connected pole

2200K | 2700K | 3000K | 3500K
 | 4000K | RGBW | Tunable White |
 Tunable Warm

CRI80 | CRI90

IP66 | IK07

Class II | Class III

DALI-2 | Casambi | DMX

Intelligent Light Solutions

Smart controls:

- Quick BLE (Casambi)
- Quick DALI
- Master Pro Evo
- Quick DMX
- Master Pro DMX

Smart services:

- Jiminy - Push Notification

Finishes		Raster Finishes	
	01 White		01 White
	04 Black		04 Black
	15 Grey		15 Grey
	F5 Rust brown		F5 Rust brown
	07 Green		07 Green
			F7 Glossy copper
			H3 Glossy black
			M3 Glossy sand
			M4 Glossy lead
			M5 Glossy urban bronze
			I9 Satin transparent




Visit our website
for more information

Newfo InOut: 3 sizes
(Ø76/98/125mm)
available from
April 2026

Newfo InOut: 3 sizes
(Ø125/152/176mm)
available from
March 2027



Public lighting - Ascoli Piceno, Italy — Product: Agorà - Ø313mm compact | Grey
Ph: Fabio Di Carlo

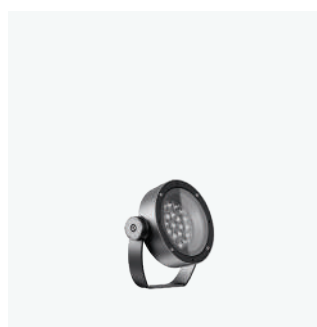

Ø204 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 3889lm

up to 100lm/W

US | SS | S | F | WF | WW

CRI80



Ø254 mm SLIM


2200K | 2700K | 3000K | 4000K

up to 6045lm

up to 99lm/W

US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI70 | CRI80

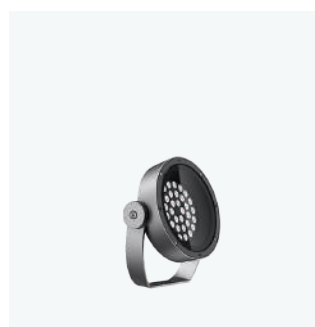

Ø254 mm COMPACT


2200K | 2700K | 3000K | 4000K

up to 4350lm

up to 113lm/W

US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI70 | CRI80

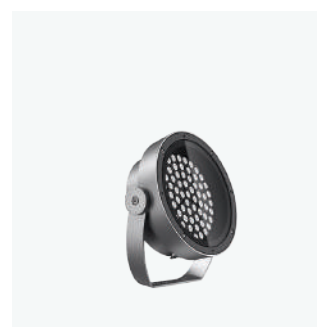

Ø313 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 10665lm

up to 106lm/W

US | SS | S | F | WF | WW | A60 | ST1 | STCy0.5 | STWt1.5

CRI70 | CRI80



Ø313 mm COMPACT

2200K | 2700K | 3000K | 4000K |
 RGB-W 3000K | RGBW Fluid Color |
 Tunable white

up to 9625lm

up to 110lm/W

US | SS | S | F | WF | WW | A60 | ST1 |
 STCy0.5 | STWt1.5

CRI70 | CRI80



Ø368 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 19481lm

up to 110lm/W

US | SS | S | F | WF

CRI80



Ø368 mm COMPACT

2200K | 2700K | 3000K | 4000K |
 RGB-W 3000K | RGBW Fluid Color |
 Tunable white

up to 18172lm

up to 112lm/W

US | SS | S | F | WF

CRI80



Ø516 mm SLIM

2200K | 2700K | 3000K | 4000K

up to 30184lm

up to 112lm/W

US | SS | S | F | WF

CRI80



Ø516 mm COMPACT

2200K | 2700K | 3000K | 4000K |
 RGB-W 3000K | RGBW Fluid Color |
 Tunable white

up to 30415lm

up to 113lm/W

US | SS | S | F | WF

CRI80



Ø516 mm COMPACT COB

2200K | 2700K | 3000K | 4000K

up to 39904lm

up to 130lm/W

F | WF | VWF

CRI65 | CRI80

Other versions available


Pole and wall mounted multiple floodlights p. 345



Multi Agorà
 on pole



Multi Agorà with
 minimal and
 connected pole




Multi Agorà
 wall mounted

ACCESSORIES


AGORÀ SLIM

- 1 Floodlight mounting bracket
- 2 Lighting body
- 3 Diffuser glass
- 4 Crossways blade louvre
- 5 Refractor for elliptical distribution
- 6 Protection grille
- 7 Cylindrical screen
- 8 Cylindrical Screen at 45°

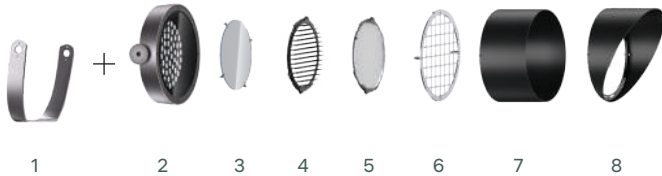

AGORÀ COMPACT

- 1 Diffuser glass
- 2 Crossways blade louvre
- 3 Refractor for elliptical distribution
- 4 Protection grille
- 5 Cylindrical screen
- 6 Cylindrical Screen at 45°

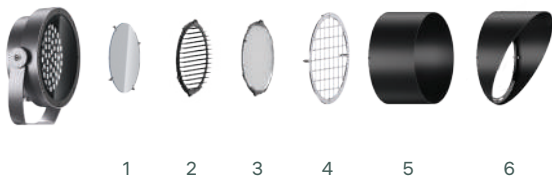

2200K | 2700K | 3000K | 4000K
 | RGBW 3000K | Tunable white |
 RGBW Fluidcolor

CRI65 | CRI70 | CRI80

IP66 | IK08

Class I | Class II | Class III

DALI-2 | DMX-RDM

Mounting accessories to be
 purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



Other awards
 Good Design Awards 2023
 BrightStar Award 2023
 Compasso d'Oro Internazionale 2025




Visit our website
 for more information



Massa Marittima town centre, Italy — Product: Agorà | Rust brown
Ph: Paolo Carlini



Sferisterio –Macerata, Italy — Product: Palco InOut - ø 153mm | Cylindrical screen | Grey/Black
Ph: iGuzzini archive



Ø30 mm


2700K | 3000K | 4000K

up to 189lm

up to 75lm/W

S | M

CRI80



FRAMER Ø30 mm


2700K | 3000K | 4000K

up to 6lm

up to 2lm/W

Framer

CRI80



Ø49 mm


2700K | 3000K | 4000K

up to 518lm

up to 85lm/W

S | M | WF

CRI80

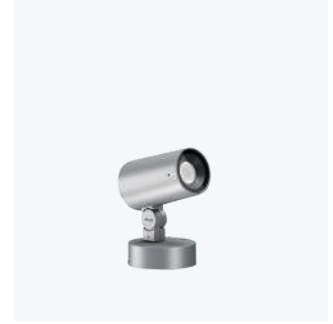

Ø83 mm

2700K | 3000K | 4000K

up to 1982lm

up to 124lm/W

SS | S | M | WF | VWF

CRI80



Ø119 mm

2700K | 3000K | 4000K

up to 2679lm

up to 101lm/W

SS | S | M | WF | VWF

CRI80



FRAMER Ø116 mm

2700K | 3000K | 4000K

up to 1032lm

up to 30lm/W

Framer

CRI80



Ø137 mm

3000K | 4000K

up to 3978lm

up to 105lm/W

SS | S | M | F | WF | VWF

CRI80



Ø153 mm

3000K | 4000K

up to 8585lm

up to 106lm/W

M | F | WF | VWF

CRI80



FRAMER Ø153 mm

3000K | 4000K

up to 1275lm

up to 20lm/W

Framer

CRI80

ACCESSORIES

PALCO INOUT Ø30 / Ø49 / Ø83

- 1 Refractor for elliptical distribution IP66
- 2 Diffuser glass IP66
- 3 Honeycomb louvre IP66
- 4 Accessory support frame
- 5 Blade louvre
- 6 Cylindrical screen
- 7 Cylindrical Screen at 45°



PALCO INOUT Ø83 / Ø119 / Ø137 / Ø153

- 1 Refractor for elliptical distribution IP66
- 2 Diffuser glass IP66
- 3 Honeycomb louvre IP66
- 4 Accessory support frame
- 5 Protection grille
- 6 Blade louvre
- 7 Cylindrical screen
- 8 Cylindrical Screen at 45°
- 9 The directional flap can be fitted individually or with others (max. 4) depending on lighting design requirements



PALCO INOUT FRAMER

- 1 Metal Gobo ø30 (a 20°) ø40 (a 25°)
- 2 Iride
- 3 Shaper
- 4 Support for gobos
- 5 Coloured filters
- 6 Metal Gobo ø 53.3 mm customized
- 7 Glass Gobo ø 53.3 mm customised



Other versions available

Pole and wall mounted multiple floodlights p. 348 / Bollards p. 440



Multi Palco
InOut on pole



Multi Palco
InOut wall
mounted



Multi Palco
InOut with
minimal and
connected pole



Palco InOut
bollard

2700K | 3000K | 4000K

CR180

IP66 | IK07

Class II, III

ON/OFF

DALI-2

Power supplies
to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown

Lux Awards 2019
Premis Delta Bronzo 2020



Visit our website
for more information



San Rocco Complex—San Giovanni Teatino (Chieti), Italy — Product: Woody - Maxi Woody Ø315 mm | Grey
Ph: Fabio Di Carlo



MAXI WOODY COMPACT Ø260 mm

3000K | 4000K

up to 4404lm

up to 116lm/W

S | F | WF

2PG

CRI80



MAXI WOODY Ø315 mm

3000K | 4000K | RGB

up to 11158lm

up to 121lm/W

S | F | WF

2PG

CRI80



MAXI WOODY Ø380 mm

3000K | 4000K

up to 6500lm

up to 116lm/W

ST1 | ST1.2


2PG

CRI70

ACCESSORIES


MAXI WOODY

- 1 Interchangeable reflectors
- 2 Refractor for elliptical distribution
- 3 Diffuser glass
- 4 Protection grille
- 5 Visor
- 6 The cylindrical screen increases the definition of the S - Superspot cone for LED C.o.B versions
- 7 The directional flap can be fitted individually or with others (max. 4) depending on lighting design requirements

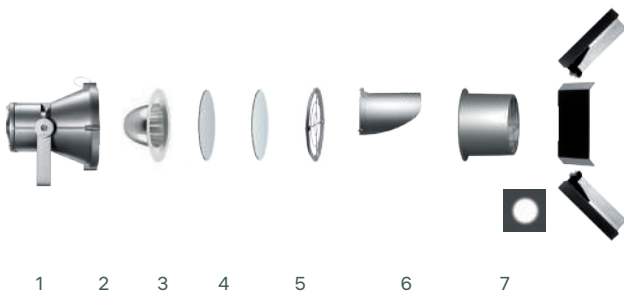


Other versions available

Pole and wall mounted multiple floodlights p. 350



Multi Woody on pole



Multi Woody wall mounted



Multi Woody with minimal and connected pole

3000K | 4000K | RGB

CRI70 | CRI70

IP66, IP67 | IK08, IK08

Class II

ON/OFF

DALI-2

1-10V

DMX-RDM

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown



Other awards
Intel Design Award 2003



Visit our website
for more information



Tisza Castle - Geszt, Hungary — Product: Platea Pro - Floodlight 296×214 mm | Grey
Ph: Gregimages, courtesy of All Light Kft



FLOODLIGHT 296×214 mm

3000K | 4000K | RGBW 4000K

up to 3116lm

up to 89lm/W

SS | S | F | WF | E | WW

2 PG through wiring

CRI80



FLOODLIGHT 406×276 mm

3000K | 4000K | RGBW 4000K

up to 8132lm

up to 98lm/W

SS | S | F | WF | E | WW

2 PG through wiring

CRI80

Other versions available

Pole and wall mounted multiple floodlights p. 352



Multi Platea Pro on pole



Multi Platea Pro wall mounted

Pole and wall mounted systems p. 314



Platea Pro top pole 296x214 mm



Platea Pro top pole 406x276 mm



Platea Pro wall mounted 296x214 mm




Platea Pro wall mounted 406x276 mm

ACCESSORIES

PLATEA PRO

- 1 Screen for elliptical distribution
- 2 Diffuser glass (to be installed internally)
- 3 Protection grille
- 4 Visor
- 5 Directional fins

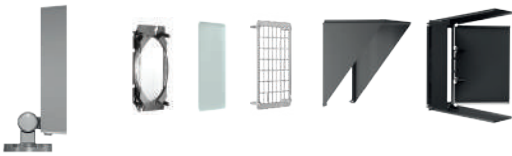

3000K | 4000K | Tunable White | RGBW 4000K

CR180

IP66 | IK08

Class II

DALI-2 | DMX-RDM

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01 White

04 Black

15 Grey

F5 Rust brown



Visit our website for more information



OWO -London, United Kingdom — Product: iPro - 155mm | Grey
Ph: James Newton



51×51 mm

3000K | 4000K

up to 389lm

up to 92lm/W

S | M | F | VWF | L

CRI80



81×81 mm

3000K | 4000K | RGB

up to 599lm

up to 77lm/W

S | F | VWF | EL | ET

CRI80



132×132 mm

3000K | 4000K

up to 1638lm

up to 92lm/W

S | M | F | WF | VWF

CRI80



155×155 mm

3000K | 4000K | Tunable white

up to 2457lm

up to 98lm/W

SS | S | M | F | WF | VWF

CRI80



192x192 mm

3000K | 4000K | RGB | RGBW
4000K | Tunable white

up to 6609lm

up to 111lm/W

SS | S | M | F | WF | VWF | ST1 | A60

CRI70 | CRI80

Other versions available

Pole and wall mounted multiple floodlights p. 353

Wall mounted luminaires p. 454



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole



iPro wall

Ceiling mounted luminaires p. 474



iPro ceiling




iPro Wall Lighting effects

ACCESSORIES

I PRO Ø 132 / Ø 155 / Ø 192

- 1 Interchangeable reflectors
- 2 Refractor for elliptical distribution
- 3 Diffuser glass for C.o.B.
- 4 Prismatic diffuser glass
- 5 Accessory support frame
- 6 Cylindrical screen
- 7 Protection grille
- 8 Visor
- 9 The directional flap can be fitted individually or with others (max. 4) depending on lighting design requirements

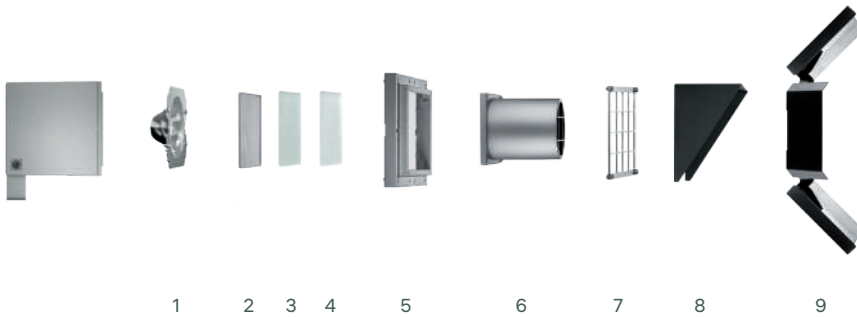

3000K | 4000K | RGB | RGB-W
4000K | Tunable white

CRI70 | CRI80

IP66 | IK05, IK07

Class I, II, III

ON/OFF

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown



Visit our website for more information





WITHOUT BASE

2200K | 3000K | 4000K

270×240 mm

up to 5380lm

up to 128lm/W

A60 | ST1.0 | ST1.5 | STCy0.5

CRI70 | CRI80



WITH BASE

2200K | 3000K | 3500K | 4000K

270×240 mm

up to 5380lm

up to 128lm/W

A60 | GL | ST1.0 | ST1.5 | STCy0.5

CRI65 | CRI70 | CRI80



WITH EXTERNAL BOX

2200K | 3000K | 3500K | 4000K |
Tunable warm

270×240 mm

up to 6087lm

up to 116lm/W

S | F | WF | WW | A

CRI65 | CRI80

A | F | S | WF | WW

Other versions available

Pole and wall mounted multiple floodlights p. 356



Lingotto indoor
wall mounted



Multi Lingotto
on pole



Multi Lingotto
with minimal and
connected pole

2200K | 3000K | 3500K | 4000K |
Tunable warm

CRI65 | CRI70 | CRI80

IP66 | IK07

Class I, II

DALI-2

Midnight preset/ZHAGA

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Zhaga Socket

Smart services:

Jiminy - Push Notification

Finishes



Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39x69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 104lm/W

S | F | WF | E

CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 /
Recessed in-ground luminaires p. 406



Linealuce 27
surface Full
Remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK08, IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories
to be ordered separately

Power supplies
to be ordered separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



reddot winner 2023
best of the best

Other awards

Grand Prix du Design (Gold) 2024
BrightStar Awards 2024



Visit our website
for more information

LINEALUCE 47

design Jean-Michel Wilmotte



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87x106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 23340lm

up to 55lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87x106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 23340lm

up to 55lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80

Other versions available

Ceiling mounted luminaires p. 471

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral

Linear systems p. 372



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Resistance to static load (2000kg)

DALI-2 | DMX-RDM

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



Visit our website
for more information



IN-GROUND LUMINAIRES



400 | LIGHT UP EARTH




402 | LIGHT UP ORBIT



404 | LINEALUCE 47



406 | LINEALUCE 27



408 | LUN-UP EVO



The Fold - Dubai — Product: Light up Earth - Ø200, Wall washer | Steel
Ph: Gavriil Papadiotis



FLUSH

3000K | 4000K | RGBW 4000K

Ø144 | Ø200 | Ø250 mm

up to 5370lm

up to 115lm/W

SS | S | M | F | WF | WW | D | L

CRI80



FRAME

3000K | 4000K

Ø144 | Ø200 | Ø250 mm

up to 5370lm

up to 115lm/W

SS | S | M | F | WF | WW | D

CRI80

Other versions available

Lighting effect luminaires



Light Up Earth flush



Light Up Earth frame

3000K | 4000K | RGBW 4000K

CRI80

IP66, IP68 (10m) | IK10

Class II

Resistance to static load (5000kg)

DMX-RDM

DALI-2

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification



Finish


13 Steel



Visit our website for more information



Canva - Sydney, Australia — Product: Light Up Orbit - Body in stainless steel flush mountend | Ø50mm | Steel
Ph: Rohan Venn



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K


Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106.7lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414




Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush




Light Up Orbit
Body in stainless
steel / all glass
flush



Light Up Orbit
Body in stainless
steel




Light Up Orbit
Body in stainless
steel flush




Light Up Orbit
Body in stainless
steel / all glass
flush



Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush



Light Up Orbit
Body in stainless
steel / all glass
flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Body finishes

12 Steel

Body finishes flush

12 Steel

14 Gold

69 Bronze

E6 Burnished chrome

Body finishes all glass flush

04 Black

12 Steel



Visit our website
for more information

LINEALUCE 47

design Jean-Michel Wilmotte



Oman Museum Across Ages -Nizwa, Oman — Product: Linealuce 47 - Recessed Integral | Rust brown
Ph: Phillip Handforth



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
 RGBW 3000K | RGBW 4000K |
 Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 89lm/W

WGS | WGM | WGWF | WF

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB |
 RGBW 3000K | RGBW 4000K |
 Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 84lm/W

WGS | WGM | WGWF | WF

CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaires p. 422 / Recessed wall luminaires p. 417



Linealuce 47
 surface Remote



Linealuce 47
 surface Integral



Linealuce 47
 surface Integral
 side box



Linealuce 47
 recessed
 Remote



Linealuce 47
 recessed
 Integral

2700K | 3000K | 4000K | RGB |
 RGBW 3000K | RGBW 4000K |
 Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Resistance to static load (2000kg)

DMX-RDM

DALI-2

Mounting accessories
 to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01
 White



04
 Black



15
 Grey



F5
 Rust brown



Visit our website
 for more information

LINEALUCE 27

design Jean-Michel Wilmotte



ZAC Marena Lacan – Antibes, France — Product: Linealuce 27 - Recessed Full Remote | Grey
Ph: iGuzzini archive



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39x69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot

CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 473 /
Recessed in-ground luminaires p. 406



Linealuce 27
surface Full
Remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K |
Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI





Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

- Finishes**
-  01 White
 -  15 Grey
 -  04 Black
 -  F5 Rust brown



Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information

LUN-UP EVO

design Dean Skira



Villa Brattlie - Nesøya, Norway — Product: Lun-Up Evo
Ph: Tomasz Majewski



IN-GROUND

3000K | 4000K

307×57×63 mm

up to 1007lm

up to 109lm/W

F | WF

CR180

3000K | 4000K

CR180

IP67 | IK08

Class III

24Vdc

Resistance to static load (1500kg)

Mounting accessories
to be ordered separately

Finish



04
Black



Visit our website
for more information



RECESSED WALL LUMINARIES



412 | WALKY



414 | LIGHT UP ORBIT




416 | LINEALUCE 27



417 | LINEALUCE 47



Casa del Pino House – Tenerife, Spain — Product: Walky - square recessed | White
Ph: Roland Halbe



ROUND RECESSED

2700K | 3000K | 4000K

Ø200 | Ø100 | Ø50 mm

up to 524lm

up to 83lm/W

AL

CRI80



SQUARE RECESSED

2700K | 3000K | 4000K

180x180 | 90x90 | 45x45 mm

up to 524lm

up to 83lm/W

AL

CRI80



RECTANGULAR RECESSED

2700K | 3000K | 4000K

270x90 | 180x45 mm

up to 641lm

up to 77lm/W

AL

CRI80

Other versions available

Wall mounted luminaires p. 458



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted



Walky round bollard



Walky square bollard



Walky rectangular bollard

Bollards p. 434

2700K | 3000K | 4000K

CRI80

IP66 | IK08, IK09

Class I, II, III

ON/OFF

DALI-2

PWM

Mounting accessories to be ordered separately

Emergency version



reddot winner 2018
best of the best

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019




Visit our website for more information

LIGHT UP ORBIT

design iGuzzini



Kalbalce Factory - Khor Kalba-Sharjah, UA EBody in — Product: Light Up Orbit - Body in stainless steel | Ø80 mm
Ph: Phillip Handforth



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K


Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414




Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush




Light Up Orbit
Body in stainless
steel / all glass
flush



Light Up Orbit
Body in stainless
steel




Light Up Orbit
Body in stainless
steel flush



Light Up Orbit
Body in stainless
steel / all glass
flush



Light Up Orbit
Body in stainless
steel



Light Up Orbit
Body in stainless
steel flush



Light Up Orbit
Body in stainless
steel / all glass
flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Body Finish



13
Steel



13
Steel



14
Gold



69
Bronze



E6
Burnished chrome

Body Finishes all glass flush



13
Steel



04
Black

Body Finishes flush



Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 /
Recessed in-ground luminaires p. 406



Linealuce 27
surface Full
Remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories
to be ordered separately

Power supplies
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



reddot winner 2023
best of the best

Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 89lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 84lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaires p. 423 / Recessed in-ground luminaires p. 404



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce 47
recessed
Remote



Linealuce
47 recessed
Integral

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Resistance to static load (2000kg)

DALI-2 | DMX-RDM

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



Visit our website
for more information



RECESSED CEILING LUMINAIRES




420 | LASER BLADE INOUT




422 | LINEALUCE 27



423 | LINEALUCE 47



424 | LIGHT UP ORBIT



426 | IROUND

LASER BLADE INOUT

design iGuzzini



Villa Brattlie - Nesøya, Norway — Product: Laser blade InOut - Recessed | Grey / Black
Ph: Tomasz Majewski



RECESSED

2700K | 3000K | 4000K

83x49 | 158x49 | 291x49 |
423x49 mm

up to 2502lm

up to 88lm/W

S | F | WF

CRI90 | CRI95

Other versions available

Wall mounted luminaires p. 452

Ceiling mounted luminaires p. 468



Laser blade
InOut wall



Laser blade
InOut ceiling

2700K | 3000K | 4000K

CRI90 | CRI95

IP65 | IK06

Class II, III

DALI-2 | Remote power supply

Power supply
to be ordered separately

Frame for recessed flush mounted
installation to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

- | | | | | | |
|---|--------------------------------------|---|--------------------------------------|---|---|
|  | 43
Black/Black |  | T1
White/Polished
urban bronze |  | T9
Rust brown/Polished
urban bronze |
|  | 47
White/Black |  | T2
White/Shiny copper |  | U0
Rust brown/Shiny
copper |
|  | 74
Grey/Black |  | T3
White/Shiny sand |  | U1
Rust brown/Shiny sand |
|  | I5
Rust brown/Black |  | T4
White/Shiny lead |  | U2
Rust brown/Shiny lead |
|  | S7
Black/Polished
urban bronze |  | T5
Grey/Polished
urban bronze | | |
|  | S8
Black/Shiny copper |  | T6
Grey/Shiny copper | | |
|  | S9
Black/Shiny sand |  | T7
Grey/Shiny sand | | |
|  | T0
Black/Shiny lead |  | T8
Grey/Shiny lead | | |



Visit our website
for more information

LINEALUCE 27

design Jean-Michel Wilmotte



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39x69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot


CRI80

Other versions available

Linear systems p. 370 / Ceiling mounted luminaires p. 472 /
Recessed in-ground luminaires p. 404



Linealuce 27
surface Full
Remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 (1m) | IK08, IK09

Resistance to static load (1000kg)

Class III

PWM

External

Mounting accessories to be ordered
separately

Power supplies to be ordered
separately

PEP ECOPASSPORT

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



reddot winner 2023
best of the best

Other awards

Grand Prix du Design (Gold) 2024
BrightStar Awards 2024



Visit our website
for more information



RECESSED REMOTE

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 89lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80



RECESSED INTEGRAL

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

87×106 mm

340 | 610 | 907 | 1204 | 1501 mm

up to 4260lm

up to 84lm/W

WGS | WGM | WGWF | WF

Through wiring

CRI80

Other versions available

Ceiling mounted luminaires p. 471

Recessed ceiling luminaires p. 423

Recessed wall luminaires p. 417



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral

Linear systems p. 372



Linealuce 47
surface Remote



Linealuce 47
surface Integral



Linealuce 47
surface Integral
side box



Linealuce 47
recessed
Remote



Linealuce 47
recessed
Integral

2700K | 3000K | 4000K | RGB |
RGBW 3000K | RGBW 4000K |
Tunable White

CRI80

IP66, IP67 | IK06, IK10

Class II, III

Resistance to static load (2000kg)

DALI-2 | DMX-RDM

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown




Visit our website
for more information

LIGHT UP ORBIT

design iGuzzini



Perelada Winery -Peralada, (Girona), Spain — Product: Light Up Orbit - Body in stainless steel | Diffusing Ø50 | Steel
Ph: Toti Ferrer - courtesy of Caves Perelada



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L

CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K


Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | D | L | E

CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K

Ø28 | Ø50 | Ø80 mm

up to 587lm

up to 106lm/W

S | M | F | WF | WW | L | E

CRI80

Other versions available

Lighting effect luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414




Light Up Orbit
Body in stainless steel



Light Up Orbit
Body in stainless steel flush



Light Up Orbit
Body in stainless steel / all glass flush



Light Up Orbit
Body in stainless steel




Light Up Orbit
Body in stainless steel flush



Light Up Orbit
Body in stainless steel / all glass flush



Light Up Orbit
Body in stainless steel



Light Up Orbit
Body in stainless steel flush



Light Up Orbit
Body in stainless steel / all glass flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Remote power supply

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Body Finish



13 Steel



13 Steel



14 Gold



69 Bronze



E6 Burnished chrome

Body Finishes all glass flush



13 Steel



04 Black

Body Finishes flush



Visit our website for more information



Istanbul Modern Museum - Istanbul, Turkey — Product: iRound - Fixed optic | Ø140 mm | Grey
Ph: Cemal Emden



**RECESSED OUTDOOR
DOWNLIGHTS**

3000K | 4000K

Ø140 | Ø228 mm

up to 3136lm

up to 120lm/W

S | M | F | WF | WW

**RECESSED OUTDOOR
DOWNLIGHTS**

3000K | 4000K

Ø140 | Ø128 mm

up to 3768lm

up to 110lm/W

M | F | WF

3000K | 4000K

CR180

IP66 | IK07

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



15
Grey



Visit our website
for more information



BOLLARDS




430 | IWAY



432 | LANDER



434 | WALKY



436 | RIBEIRA




438 | GENEVA




439 | FLYN



439 | DOMY



440 | PALCO INOUT
BOLLARD



442 | TYPHA



HimmerLand Resort - Farsø, Denmark — Product: iWay - h=1000mm | Super Comfort Round | Black
Ph: Tomasz Majewski



BOLLARD ROUND

3000K | 4000K
 Ø170 mm | Ø90 mm
 h= 250 | 610 | 1000 mm
 up to 1269lm
 up to 102lm/W
 360°
 CRI80



BOLLARD SUPER COMFORT ROUND

3000K | 4000K
 Ø180
 h= 169 | 529 | 919 mm
 up to 714lm
 up to 54lm/W
 360° | 180°
 CRI80



BOLLARD SQUARE

3000K | 4000K
 170×170 mm | 90×90 mm
 h= 250 | 610 | 1000 mm
 up to 1161lm
 up to 93lm/W
 360°
 CRI80



BOLLARD SUPER COMFORT SQUARE

3000K | 4000K
 180×180
 h= 169 | 529 | 919 mm
 up to 609lm
 up to 44lm/W
 360° | 180°
 CRI80



VELVET

2200K | 2700K | 3000K | 4000K

Ø180 mm

h= 300 | 600 | 1000 mm

up to 715lm

up to 85lm/W

360° | 180°

CRI80

Dark sky



VELVET

2200K | 2700K | 3000K | 4000K

Ø180 mm

h= 300 | 600 | 1000 mm

up to 715lm

up to 85lm/W

360° | 180°

CRI80



RETROFIT KIT - ROUND BOLLARD

3000K | 4000K

Retrofit Optics: Ø167 mm

Retrofit Cover: Ø170 mm

Retrofit Pole: Ø170×599 mm | Ø170×899 mm

Retrofit Base: Ø162×40 mm

up to 1269lm

up to 102lm/W

360°

CRI80



RETROFIT KIT - SQUARE BOLLARD

3000K | 4000K

Retrofit Optics: 167×167 mm

Retrofit Cover: 170×170 mm

Retrofit Pole: 170×170×599 mm | 170×170×899 mm

Retrofit Base: 162×162×40 mm

up to 1161lm

up to 93lm/W

360°

CRI80



RETROFIT KIT - ROUND SUPER COMFORT BOLLARD

3000K | 4000K

Retrofit Optics: Ø180 mm

Retrofit Pole: Ø171×529 mm | Ø171×919 mm

Retrofit Base: Ø162×40 mm

up to 714lm

up to 54lm/W

360° | 180°

CRI80



RETROFIT KIT - SQUARE SUPER COMFORT BOLLARD

3000K | 4000K

Retrofit Optics: 180×180 mm

Retrofit Pole: 171×171×529 mm | 171×171×919 mm

Retrofit Base: 162×162×40 mm

up to 609lm

up to 44lm/W

360° | 180°

CRI80

2200K | 2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK10

Class II

ON/OFF | DALI-2

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



07 Green



Visit our website for more information
iWay Velvet available from June 2026



Pista 500 – Turin, Italy — Product: Lander - h=950mm | OpticA60 | Grey
Ph: Michele Nastasi



BOLLARD

2200K | 2700K | 3000K | 4000K

270x126 mm

h= 650 | 950 mm

up to 2000lm

up to 115lm/W

A60 | ST1

CRI80



BOLLARD VERTICAL LIGHT

3000K

270x126 mm

h=950 mm

up to 1903lm

up to 108lm/W

AL | AT

CRI80

Other versions available

Wall mounted luminaires p. 456

Pole p. 310



Lander wall mounted



Lander Pole h=2.5 m



Lander Pole h=4 m

2200K | 2700K | 3000K | 4000K

CRI80

IP66 | IK09

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



07 Green



reddot winner 2017
best of the best

Other awards
German Design Award 2019



Visit our website
for more information



Tower of Bari lighting – Nuoro, Italy — Product: Walky - Rectangular bollard | h=600 | Rust brown
Ph: Stefano Ferrando, Studio Vetroblu



ROUND BOLLARD

2700K | 3000K | 4000K

Ø200 | Ø100 | Ø50 mm
h= 600 | 900 mm


up to 448lm

up to 39lm/W

AL

Outgoing cable

CRI80



SQUARE BOLLARD

2700K | 3000K | 4000K

180×180 | 90×90 | 45×45 mm
h= 600 | 900 mm


up to 448lm

up to 39lm/W

AL

Outgoing cable

CRI80



RECTANGULAR BOLLARD

2700K | 3000K

270×90 | 180×45 mm
h= 400 | 600 mm

up to 336lm

up to 28lm/W

AL

Outgoing cable

CRI80

Other versions available

Wall mounted luminaires p. 458



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted



Walky round bollard



Walky square bollard



Walky rectangular bollard

Recessed wall luminaires p. 412

2700K | 3000K | 4000K

CRI80

IP66 | IK08, IK09

Class I, II, III

ON/OFF | DALI-2 | PWM

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



reddit winner 2018
best of the best

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019



Visit our website
for more information

RIBEIRA

design David Chipperfield





RIBEIRA BOLLARD

2700K | 3000K | 3500K | 4000K

Ø150

h=600 | 900 mm

up to 820lm

up to 105lm/W

AF | AS | No Dot

CRi80

Other versions available

Wall mounted luminaires p. 448



Ribeira wall mounted

Ceiling mounted luminaires p. 466



Ribeira ceiling mounted

2700K | 3000K | 3500K | 4000K

CRi80

IP66 | IK06

Class II

Casambi

DALI-2

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes

- 01 White
- 04 Black
- 15 Grey
- F5 Rust brown
- 07 Green
- Red clay



Visit our website for more information



GENEA

2200K | 2700K | 3000K

Ø200

h=325 | 575 | 895 mm

up to 700lm

up to 55lm/W

360° | 180°

CR180

2200K | 2700K | 3000K

CR180

IP66 | IK06

Class I, II

Casambi

DALI-2

Power supply
to be purchased separately

Mounting accessories
to be ordered separately

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



07
Green



Visit our website
for more information
Genea available from
November 2026

DOMY

design iGuzzini



2700K | 3000K | 4000K

Ø210 mm

h=250 | 600 | 1000 mm

up to 900lm

up to 90lm/W


360°

CR180

IP65 | IK08

Class II

ON/OFF



Visit our website
for more information
Domy available from
July 2026

FLYN

design iGuzzini



2700K | 3000K | 4000K

Ø180 mm

h=250 | 600 | 1000 mm

up to 900lm

up to 90lm/W


360°

CR180

IP65 | IK08

Class II

ON/OFF



Visit our website
for more information
Flyn available from
July 2026

PALCO INOUT BOLLARD

design Artec Studio



BOLLARD Ø30 MM

2700K | 3000K | 4000K

h= 300 | 600 | 900 mm

up to 189lm

up to 75lm/W

S | M

CRI80



FRAMER BOLLARD Ø30 MM

2700K | 3000K | 4000K

h= 300 | 600 | 900 mm

up to 6lm

up to 2lm/W

Framer

CRI80



BOLLARD Ø49 MM

2700K | 3000K | 4000K

h= 300 | 600 | 900 mm

up to 518lm


up to 85lm/W

S | M | WF


CRI80

Other versions available


Floodlights p. 386




Palco InOut
Ø30 mm



Palco InOut
Ø30 mm



Palco InOut
Ø49 mm



Palco InOut
Ø83 mm



Palco InOut
Ø119 mm



Palco InOut
Ø116 mm



Palco InOut
Ø137 mm



Palco InOut
Ø153 mm



Palco InOut



Palco InOut
Framer Ø153 mm

Pole and wall mounted multiple floodlights p. 348



Multi Palco
InOut on pole



Multi Palco
InOut wall
mounted



Multi Palco
InOut with
minimal and
connected pole

2700K | 3000K | 4000K

CRI80

IP66 | IK07

Class III

Casambi

DALI-2

Power supplies
to be ordered separately

Mounting accessories
to be ordered separately

Intelligent Light Solutions

Smart controls:

Organic Response (control + sensor)

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Space management |
Push notification

Finishes



01
White

04
Black

15
Grey

F5
Rust brown

07
Green


Lux Awards 2019
Premis Delta Bronzo 2020



Visit our website
for more information
Palco InOut: bollard
available from
April 2026



Office building – Nanterre, France — Product: Typha
Ph: Luc Boegly



**BOLLARD FOR RESIDENTIAL
AREAS**

4000K

Ø15 mm | h= 1000 | 1300 | 1500 mm

up to 50lm

up to 14lm/W

D

CR180

4000K

CR180

IP66, IP67 | IK07

Class II, III

Power supplies
to be ordered separately

Mounting accessories to be ordered
separately

Finsh



13
Steel



Visit our website
for more information



WALL MOUNTED LUMINAIRES



446 | TRICK



448 | RIBEIRA



450 | ALLURE




452 | LASER BLADE INOUT



454 | IPRO



456 | LANDER



458 | WALKY



460 | MOONLET



461 | CRYSO



Castello al Monte - San Severino Marche, Italy — Product: Trick - Trick180°| Blade effect| Grey
Ph: Studio Buschi



EM
3000K
Ø110×166 mm
up to 66.6lm
up to 5lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140 | Ø124×164 mm
up to 180lm
up to 19lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110×42 | Ø110×75 | Ø160×85 mm
up to 528lm
up to 38lm/W
R360°
CRI80



180°
3000K
Ø89×57 | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



WASHER

3000K
 Ø89×57 | Ø110×89 mm
 up to 191lm
 up to 49lm/W
 W
 CRI80

Other versions available

Ceiling mounted luminaires p. 464 / Lighting effect luminaires p. 478




Trick em




Trick 360° and light blade effect



Trick radial



Trick 180°









Trick washer

3000K | RGB
 CRI80
 IP20, IP66 | IK07
 Class II | Class III
 DMX-RDM
 Mounting accessories to be purchased separately
 Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo
 Quick DMX
 Master Pro DMX

Smart services:
 Jiminy - Push Notification

- Finishes**
-  01 White
 -  04 Black
 -  15 Grey
 -  F5 Rust brown
- Other colors on request**
-  E4 White/Chrome
 -  E5 White/Grey



Other awards:
 Compasso d'Oro Menzione d'Onore 2016
 Win World Interiors Awards 2014
 Premis Delta ORO 2014
 Lux Awards 2014
 Lighting Design Award 2015
 Light Middle East Award: Outdoor Lighting
 Product of the Year 2025
 Grand Prix du Design 2025



Visit our website for more information





Ø150 WALL MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent |
White Transparent | Opal

up to 820lm


up to 110lm/W

GL | No Dot

CRI80

Other versions available

Bollards p. 436



Ceiling mounted luminaires p. 466



2700K | 3000K | 3500K | 4000K

CRI80

IP66 | (Ø150 mm) IK06

Flush | Frame

Class I

DALI-2 | Casambi

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



Visit our website
for more information



Private residence - Arcevia, Italy — Product: Allure - 120×250 mm | Optic AF/AF | Green
Ph: Fabio Di Carlo



120×150 mm

2700K | 3000K | 3500K | 4000K

up to 1570lm

up to 120lm/W

AF | AS-DOWN | AF-UP | AS-UP | AF/
AF | AF/AS | AS/AS

CRI80



120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-
UP | AF/AF | AF/AS | AS/AS

CRI80



GRAPHIC 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 42lm/W

L up | L down | ADJ Beam Up | ADJ
Beam Down | L/ADJ Beam | ADJ
Beam / L | L/L | ADJ Beam / ADJ
Beam

CRI80



SMART 120×150 mm

2700K | 3000K | 3500K | 4000K

up to 1570lm

up to 113lm/W

AF | AS-DOWN | AF-UP | AS-UP | AF/
AF | AF/AS | AS/AS

CRI80



SMART 120×250 mm

2700K | 3000K | 3500K | 4000K

up to 2456lm

up to 126lm/W

AF-DOWN | AS-DOWN | AF-UP | AS-UP | AF/AF | AF/AS | AS/AS

CRI80

Other versions available

Lighting effect luminaires p. 480



120×250 mm
Lighting effect

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I, II

ON/OFF

Casambi

DALI-2

HF Motion | HF Motion Casambi

Lower raster
to be purchased separately

Polycarbonate flush-mounted
cover 150×79 mm

Carter with visible edge
in polycarbonate 150×79 mm

Casing with visible edge
in PMMA 150×79 mm

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo


HF Motion (Plug&Play)

HF Motion Casambi (Progra mmable)

Smart services:

Jiminy - Push Notification

Body Finishes



Raster Finishes



Other awards
Grand Prix du Design 2024
Good Design 2024



Visit our website
for more information

LASER BLADE INOUT

design iGuzzini



Royal Opera House – London, United Kingdom — Product: Laser blade InOut
Ph: James Newton



INOUT WALL

2700K | 3000K | 4000K
 83×66×102 | 158×66×102 mm
 up to 669lm
 up to 56lm/W
 WF
 CRI90 | CRI95

Other versions available

Recessed ceiling luminaires p. 420



Ceiling mounted luminaires p. 468



2700K | 3000K | 4000K
 CRI90 | CRI95
 IP65 | IK06
 Class I
 Remote power supply
 Power supply to be purchased separately

Intelligent Light Solutions

Smart controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo

Smart services:
 Jiminy - Push Notification

Finishes

- | | | | | | |
|---|---------------------------------|---|---------------------------------|---|--------------------------------------|
|  | 43
Black/Black |  | T1
White/Glossy urban bronze |  | T9
Rust brown/Glossy urban bronze |
|  | 47
White/Black |  | T2
White/Glossy copper |  | U0
Rust brown/Glossy copper |
|  | 74
Grey/Black |  | T3
White/Glossy sand |  | U1
Rust brown/Glossy sand |
|  | 15
Rust brown/Black |  | T4
White/Glossy lead |  | U2
Rust brown/Glossy lead |
|  | S7
Black/Glossy urban bronze |  | T5
Grey/Glossy urban bronze | | |
|  | S8
Black/Glossy copper |  | T6
Grey/Glossy copper | | |
|  | S9
Black/Glossy sand |  | T7
Grey/Glossy sand | | |
|  | T0
Black/Glossy lead |  | T8
Grey/Glossy lead | | |



Visit our website for more information



Private residence in Neuilly-sur-Seine -France — Product: iPro | wall mounted | Up/down light | Grey
Ph: Didier Boy de la Tour



51 mm WALL MOUNTED

3000K | 4000K

51×51×56 | 51×51×161 mm

up to 221lm

up to 49lm/W

VWF | L | L/VWF | VWF/VWF | L/L

CRI80



81 mm WALL MOUNTED

3000K | 4000K

up to 494lm

up to 64lm/W

F | VWF | L

CRI80



132 mm WALL MOUNTED

3000K | 4000K

up to 1522lm

up to 109lm/W

S | M | F | VWF | WF

CRI80



155 mm WALL MOUNTED

3000K | 4000K | Tunable white

up to 2457lm

up to 97lm/W

VWF | WF

CRI80



192 mm WALL MOUNTED

3000K | 4000K | RGB | Tunable white
 up to 6609lm
 up to 111lm/W
 S | M | F | VWF | WF
 2 PG
 CRI80

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Ceiling mounted luminaires p. 474



iPro 51×51 mm ceiling mounted



iPro 81×81 mm ceiling mounted



iPro 132×132 mm ceiling mounted



iPro 155×155 mm ceiling mounted



iPro 192×192 mm ceiling mounted

Pole mounted multiple flood p. 354



Multi Pro on pole



MultitPro wall mounted



Multi Pro with minimal and connected pole



iPro Wall Lighting effects

Lighting effect luminaires p. 482

3000K | 4000K | RGB | Tunable white
 CRI80
 IP66 | IK07
 Class I, II, III
 ON/OFF
 DALI-2
 DMX-RDM
 Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo
 Quick DMX
 Master Pro DMX

Smart services:
 Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown




reddot winner 2017
 best of the best

Other awards
 German Design Award 2019



Visit our website for more information

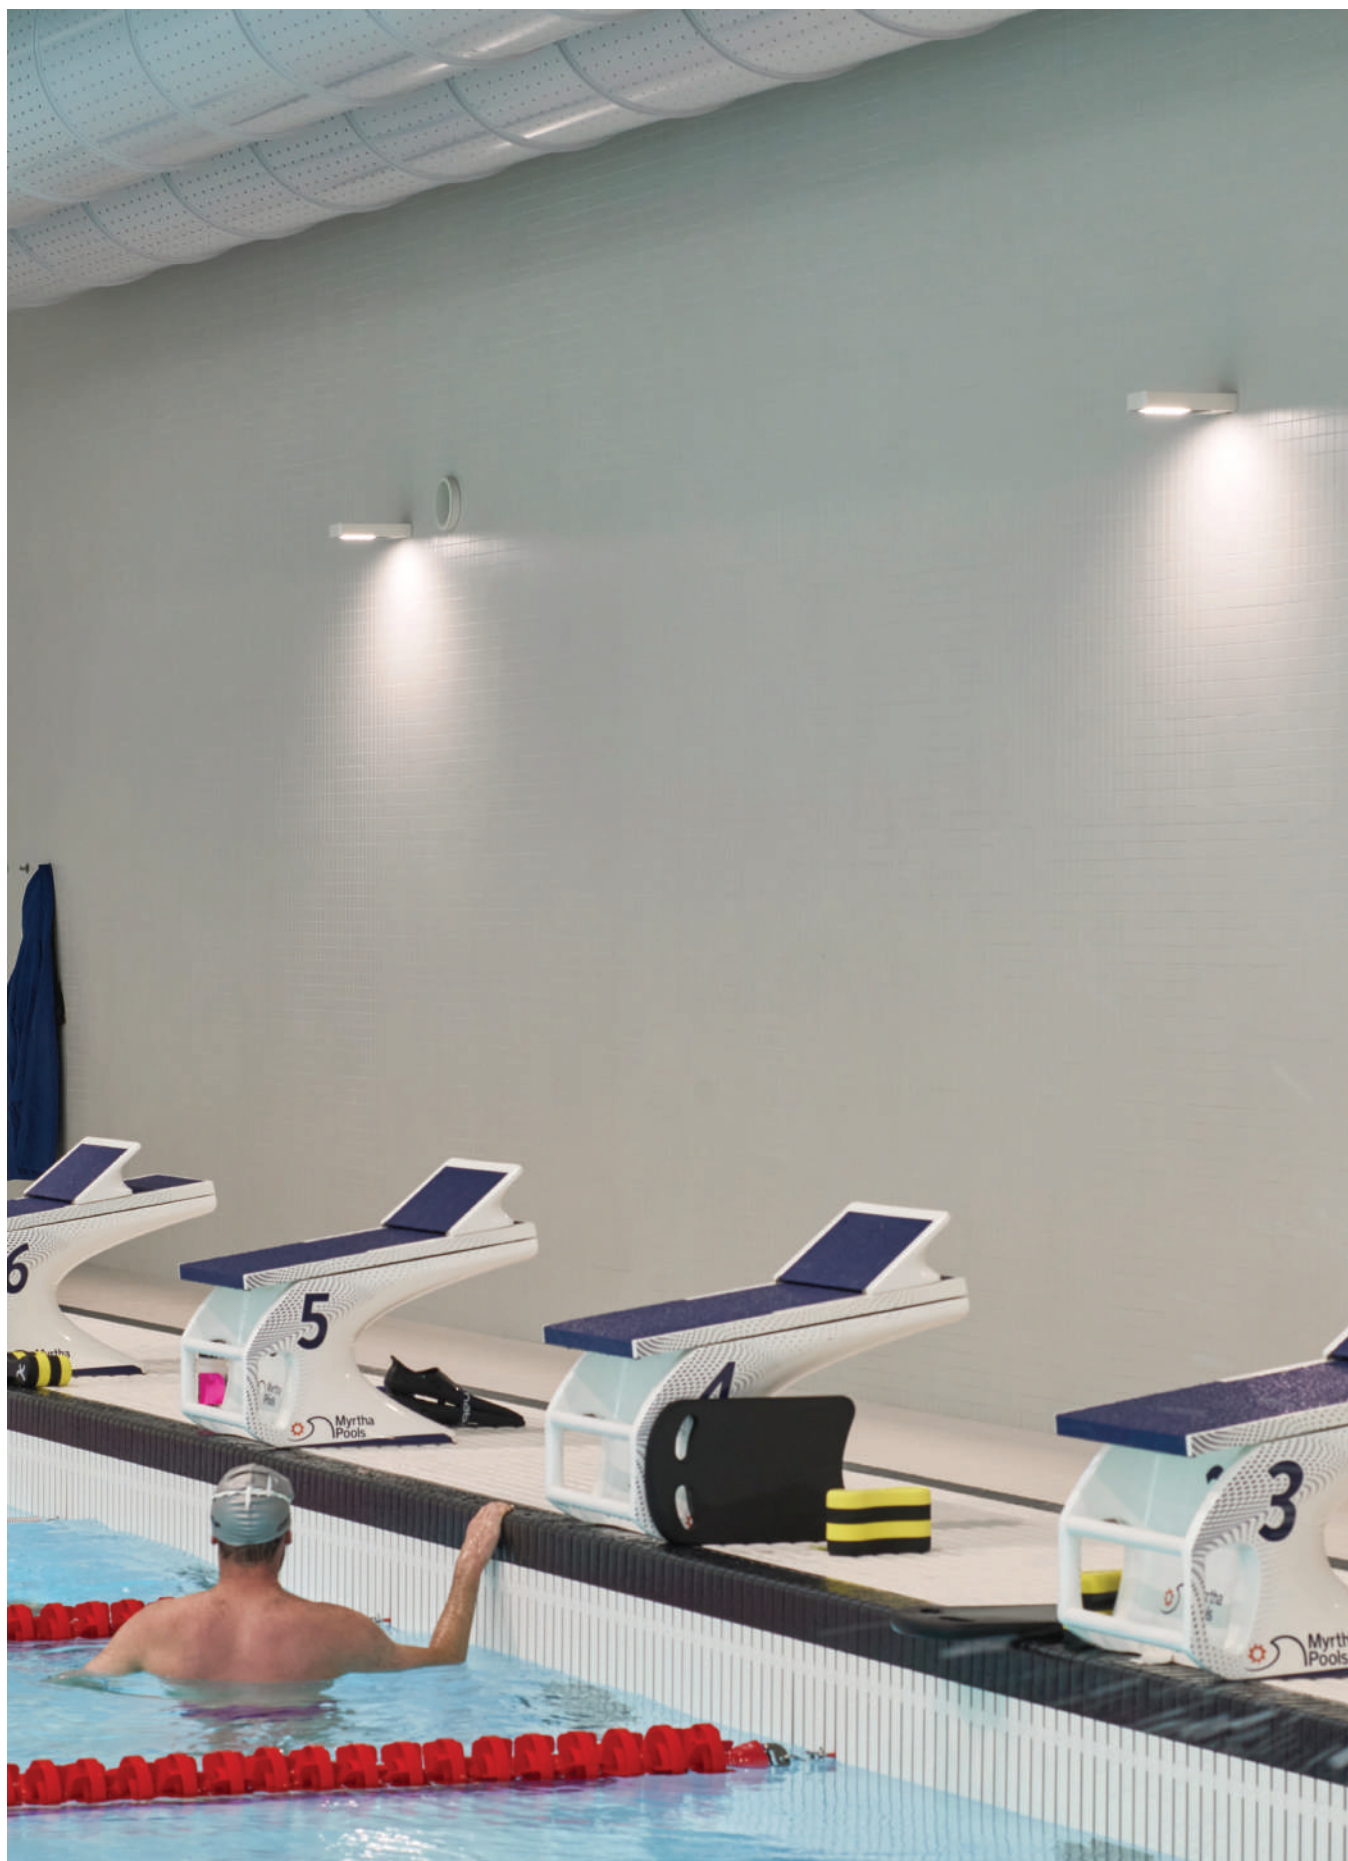

Club Virgin Active Milano Bocconi – Milan, Italy — Product: Lander - Longitudinal Asymmetric Optic| White
Ph: Paolo Carlini



WALL

3000K

290×126×90 mm

up to 2278lm

up to 103lm/W

CR180

Other versions available

Bollards p. 432

Pole p. 310



Lander bollard



Lander bollard vertical light



Lander on pole h = 2.5 m



Lander on pole h = 4 m

3000K

CR180

IP66 | IK09

Class II

DALI-2

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01 White



04 Black



15 Grey



F5 Rust brown



07 Green



Visit our website for more information



Kalba Ice Factory - Khor Kalba, Sharjah, UAE — Product: Walky - Rectangular wall mounted | 270×90 mm | Grey
Ph: Phillip Handforth

**ROUND WALL MOUNTED**

2700K | 3000K | 4000K

Ø200 | Ø100 mm

up to 524lm

up to 90lm/W

AL

CRI80

**SQUARE WALL MOUNTED**

2700K | 3000K | 4000K

180×180×45 | 90×90×90 mm

up to 524lm

up to 90lm/W

AL

CRI80

**RECTANGULAR WALL MOUNTED**

2700K | 3000K | 4000K

270×36 | 60×270 mm

up to 640lm

up to 77lm/W

AL

CRI80

Other versions available

Bollards p. 434



Walky round bollard




Walky square bollard



Walky rectangular bollard

Recessed wall luminaires p. 412



Walky round wall mounted



Walky square wall mounted



Walky rectangular wall mounted

2700K | 3000K | 4000K

CRI80

IP66 | IK08, IK09

Class I, II, III

ON/OFF

DALI-2

PWM

Mounting accessories to be purchased separately

Finishes

01 White



04 Black



15 Grey



F5 Rust brown

Other awards
Design Plus L+B 2018
Lighting Design Awards 2019
German Design Awards 2019**Intelligent Light Solutions****Smart controls:**

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification



Visit our website for more information

MOONLET

design iGuzzini



MOONLET

3000K | 4000K

Ø240 | 350 mm

up to 3200lm

up to 110lm/W

GL

CRI80

DALI-2

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK07

Class II

DALI-2

Finishes



O1
White



O4
Black



F5
Rust brown

Intelligent Light Solutions

Smart controls:

Master Pro Evo

Quick BLE

Quick DALI

Smart services:

Jiminy - Push Notification



Visit our website
for more information
Moonlet available from
November 2026



CRYSO

2700K | 3000K | 3500K | 4000K

Ø163 mm

up to 250lm

up to 23lm/W

R360°

CR180

Other versions available

Ceiling mounted luminaires p. 470



Cryso ceiling



Cryso pendant

2700K | 3000K | 3500K | 4000K

CR180

IP66 | IK07

Class II

DALI-2

Mounting accessories for pendant installation to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



O1
White

O4
Black

15
Grey

F5
Rust brown

O7
Green



Visit our website
for more information
Cryso available from
March 2026



CEILING MOUNTED LUMINAIRES



464 | TRICK



466 | RIBEIRA



468 | LASER BLADE INOUT



470 | CRYSO



471 | LINEALUCE 47



472 | LINEALUCE 27



474 | IPRO



Old Town of Paphos - Paphos, Cyprus — Product: Trick - Trick 360° and light blade effect | Grey
Ph: Maria Efthymiou - Creative Photo Room




EM
3000K
Ø110 x 166 mm
up to 66lm
up to 5lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89x140 mm | Ø124x164 mm
up to 180lm
up to 19lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110x42 | Ø110x75 | Ø160x85 mm
up to 528lm
up to 38lm/W
R360°
CRI80



180°
3000K
Ø89x57 mm | Ø110x89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



WASHER

3000K
 Ø89×57 mm | Ø110×89 mm
 up to 191lm
 up to 49lm/W
 W
 CRI80

Other versions available

Wall mounted luminaires p. 446



Trick em



Trick 360° and
light blade effect



Trick radial



Trick 180°



Trick washer

Lighting effect luminaires p. 478



Trick em




Trick 360° and
light blade effect



Trick radial



Trick 180°



Trick washer





3000K | RGB
 CRI80
 IP20, IP66 | IK07
 Class II, III
 DMX-RDM
 Mounting accessories
to be ordered separately
 Power supply to be
ordered separately

Intelligent Light Solutions

Smart controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo
 Quick DMX
 Master Pro DMX

Smart services:
 Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown



Other awards:
 Compasso d'Oro Menzione d'Onore 2016
 Win World Interiors Awards 2014
 Premis Delta ORO 2014
 Lux Awards 2014
 Lighting Design Award 2015
 Light Middle East Award: Outdoor
 Lighting Product of the Year 2025
 Grand Prix du Design 2025



Visit our website
for more information

RIBEIRA

design David Chipperfield





Ø150 CEILING MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent |
White Transparent | Opal

up to 820lm

up to 110lm/W

GL | No Dot

CRI80



Ø210 CEILING MOUNTED

2700K | 3000K | 3500K | 4000K

Flush | Frame

Black Transparent | White Transparent

up to 2250lm


up to 110lm/W

M | F | WF

CRI80

Other versions available

Bollards p. 436



Wall mounted luminaires p. 448



2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06 (Ø150 mm)

IP66 | IK08 (Ø210 mm)

Flush | Frame

Class I, II

DALI-2 | Casambi

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



01
White



04
Black



15
Grey



F5
Rust brown



07
Green



Red clay



Visit our website
for more information
Cryso available from
March 2026

LASER BLADE INOUT

design iGuzzini



Amarbayasgalant Monastery - Baruun Buren, (Selenge Province), Mongolia — Product: Laser blade InOut - Ceiling-mounted |Wide Flood optic | Black / Black
Ph: Courtesy of NCD Group and Azzura Architects



CEILING

2700K | 3000K | 4000K

83×50×99 mm | 158×50×99 mm

up to 847lm

up to 71lm/W

S | F | WF

CRI90 | CRI95

Other versions available

Recessed ceiling luminaires p. 420

Wall mounted luminaires p. 454



Laser blade
InOut recessed



Laser blade
InOut wall

2700K | 3000K | 4000K

CRI90 | CRI95

IP65 | IK06

Class I

Remote power supply

Power supply to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification

Finishes



43
Black/Black



47
White/Black



74
Grey/Black



15
Rust brown/Black



S7
Black/Glossed
urban bronze



S8
Black/Glossed copper



S9
Black/Glossed sand



T0
Black/Glossed lead



T1
White/Glossed
urban bronze



T2
White/Glossed copper



T3
White/Glossed sand



T4
White/Glossed lead



T5
Grey/Glossed
urban bronze



T6
Grey/Glossed copper



T7
Grey/Glossed sand



T8
Grey/Glossed lead



T9
Rust brown/Glossed
urban bronze



U0
Rust brown/Glossed
copper



U1
Rust brown/Glossed sand



U2
Rust brown/Glossed lead



Visit our website
for more information



CEILING

2700K | 3000K | 3500K | 4000K

Ø163 mm

up to 550lm

up to 50lm/W

M | F | VWF | 6L

CRI80

PENDANT

2700K | 3000K | 3500K | 4000K

Ø163 mm

up to 550lm

up to 50lm/W

M | F | VWF | 6L

CRI80

Other versions available

Wall mounted luminaires p. 461



2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK07

Class II

DALI-2

Mounting accessories for pendant installation to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart services:

Jiminy - Push Notification



Finishes

01 White



04 Black



15 Grey



F5 Rust brown



07 Green



Visit our website for more information
Cryo available from March 2026

LINEALUCE 47

design Jean-Michel Wilmotte



SURFACE REMOTE

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White

47×83 mm

340 mm | 611 mm | 908 mm | 1205 mm | 1502 mm

up to 5530lm

up to 96lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White

47×83 mm

340 mm | 611 mm | 908 mm | 1205 mm | 1502 mm

up to 5530lm

up to 88lm/W

WGS | WGM | WGWF | S | F | WF

CRI80



SURFACE INTEGRAL SIDE BOX

2700K | 3000K | 4000K | RGB | RGBW 4000K | Tunable White

102×52 mm

340 mm | 611 mm | 908 mm | 1205 mm | 1502 mm

up to 5146lm

up to 86lm/W

WGS | WGM | WGWF

CRI80

Other versions available

Linear systems p. 372 / Ceiling mounted luminaires p. 471 / Recessed ceiling luminaires p. 422 / Recessed wall luminaires p. 416



Linealuce 47 surface Remote



Linealuce 47 surface Integral



Linealuce 47 surface Integral side box



Linealuce 47 recessed Remote



Linealuce 47 recessed Integral

2700K | 3000K | 4000K | RGB | RGBW 3000K | RGBW 4000K | Tunable White

CRI80

IP66, IP67 | IK05, IK06, IK10

Class II, III

Walkable (2000kg)

DALI-2 | DMX-RDM

Mounting accessories to be purchased separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes



Visit our website for more information



SURFACE FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



PENDANT FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



RECESSED FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

39×69 mm

356 | 652 | 947 | 1243 | 1538 mm

up to 1960lm

up to 103lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | WGS - HC |
WGM - HC | WGWF - HC | S | F | WF |
E | GL No Dot | WG No Dot

CRI80



SPAN WIRE FULL REMOTE

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

27×37 mm

329 | 625 | 920 | 1216 | 1511 mm

up to 2065lm

up to 108lm/W

WGS | WGM | WGWF | WGS - ML |
WGM - ML | WGWF - ML | S | F | WF |
E | GL No Dot | WG No Dot

CRI80

Other versions available

Pendants p. 146 / Ceiling mounted luminaires p. 471 / Recessed in-ground luminaires p. 406




Linealuce 27
surface Full
Remote



Linealuce 27
pendant Full
Remote



Linealuce 27
recessed Full
Remote



Linealuce 27
span-wire

2220K | 2700K | 3000K | 4000K
| Tunable White | Tunable Warm |
RGBW 3000K | RGBW 4000K

CRI80

IP66, IP68 | IK06, IK08, IK09

Walkable (1000kg)

Class III

PWM

Mounting accessories
to be ordered separately

Power supplies
to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI


Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification



Other awards
Grand Prix du Design (Gold) 2024
BrightStar Award 2024



Visit our website
for more information



Public lighting in Mantua – Mantua, Italy — Product: iPro - Ceiling mounted | 132 mm | Grey
Ph: Paolo Carlini



51×51 mm CEILING MOUNTED

3000K | 4000K

up to 348lm

up to 82lm/W

F

CR180



81×81 mm CEILING MOUNTED

3000K | 4000K

up to 526lm

up to 68lm/W

F

CR180



132×132 mm CEILING MOUNTED

3000K | 4000K

up to 1522lm

up to 109lm/W

WF | VWF

CR180



155×155 mm CEILING MOUNTED

3000K | 4000K

up to 2040lm

up to 104lm/W

WF | VWF

CR180



192×192 mm CEILING MOUNTED

3000K | 4000K

up to 3304lm

up to 124lm/W

F | WF

CRI80

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Wall mounted luminaires p. 454



iPro 51 mm wall mounted



iPro 81 mm wall mounted



iPro 132 mm wall mounted



iPro 155 mm wall mounted



iPro 192 mm wall mounted

Pole mounted multiple flood p. 354



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole



iPro Wall lighting effects

Lighting effect luminaires p. 482

3000K | 4000K

CRI80

IP66 | IK07

Class I, II, III

ON/OFF | DALI-2 |

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart services:

Jiminy - Push Notification

Finishes


-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown



Visit our website for more information



LIGHTING EFFECT LUMINAIRES



478 | TRICK




480 | ALLURE



482 | IPRO



484 | UNDERSCORE INOUT



486 | LIGHT UP ORBIT



488 | NEWFO INOUT



489 | PALCO INOUT FRAMER



The Backyard Hazmieh - Lebanon, United Arab Emirates — Product: Trick - Radial 360° effect | Grey
Ph: Ieva Saudargaitė




EM
3000K
Ø110×166 mm
up to 66lm
up to 6lm/W
360° Blade optic (divided in ten sectors that can be controlled separately)
CRI80



360° AND LIGHT BLADE EFFECT
3000K | RGB
Ø89×140 | Ø124×164 mm
up to 180lm
up to 20lm/W
360° Blade optic | L/L
CRI80



RADIAL
3000K
Ø110×42 | Ø110×75 | Ø160×85 mm
up to 528lm
up to 40lm/W
R360°
CRI80



180°
3000K
Ø89×57 | Ø110×89 mm
up to 150lm
up to 33lm/W
L180°
CRI80



WASHER

3000K
 Ø89×57 | Ø110×89 mm
 up to 192lm
 up to 50lm/W
 W
 CRI80

Other versions available

Ceiling mounted luminaires p. 464 / Wall mounted luminaires p. 446



Trick em



Trick 360° and light blade effect



Trick radial







Trick 180°





Trick washer

3000K | RGB
 CRI80
 IP20, IP66 | IK07
 Class II, III
 DMX-RDM
 Mounting accessories to be ordered separately
 Power supply to be ordered separately

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown

Other colors on request

-  E4 White/Chrome
-  E5 White/Grey

Other awards:
 Compasso d'Oro Menzione d'Onore 2016
 Win World Interiors Awards 2014
 Premis Delta ORO 2014
 Lux Awards 2014
 Lighting Design Award 2015
 Light Middle East Award: Outdoor Lighting Product of the Year 2025
 Grand Prix du Design 2025

Intelligent Light Solutions

Smart Controls:
 Quick BLE (Casambi)
 Quick DALI
 Master Pro Evo
 Quick DMX
 Master Pro DMX

Smart Services:
 Jiminy - Push Notification



Visit our website for more information



Private residence - Arcevia, Italy — Product: Allure - 120×250 mm | Optic L/ADJ | Rust brown
Ph: Fabio Di Carlo



GRAPHIC 120x150 MM

2700K | 3000K | 3500K | 4000K

up to 425lm

up to 43lm/W

L up | L down | ADJ Beam Up | ADJ
Beam Down | L/ADJ Beam | ADJ
Beam / L | L/L | ADJ Beam / ADJ
Beam

CRI80

Other versions available

Lighting effect luminaires p. 481



Allure
120x150 mm



Allure
120x250 mm



Allure Smart
120x150 mm



Allure Smart
120x250 mm



L
Down



L
Up



ADJ
Down



ADJ
Up




ADJ / L
Up/Down



L / ADJ
Up/ Down



L / L
Up/ Down



ADJ / ADJ
Up/ Down

2700K | 3000K | 3500K | 4000K

CRI80

IP66 | IK06

Class I


On/off

Lower raster to be ordered separately

Raster finishes



Body finishes



Other awards
Grand Prix du Design 2024
Good Design 2024



Visit our website
for more information



Private residence in Neuilly-sur Seine - France — Product: iPro -Ø51 mm | wall mounted | Up/down light | Grey
Ph: Didier Boy de la Tour



WALL MOUNTED LIGHTING EFFECTS

51×51×56 mm | 51×51×161 mm |
81×81×86 mm

3000K | 4000K

up to 221lm

up to 50lm/W

L | L/L | L/VWF | VWF/VWF

CR180

Other versions available

Floodlights p. 392



iPro 51 mm



iPro 81 mm



iPro 132 mm



iPro 155 mm



iPro 192 mm

Pole and wall mounted multiple floodlights p. 354



Multi Pro on pole



Multi Pro wall mounted



Multi Pro with minimal and connected pole

Wall mounted luminaires p. 454



iPro 51 mm wall mounted



iPro 81 mm wall mounted



iPro 132 mm wall mounted



iPro 155 mm wall mounted



iPro 192 mm wall mounted

Ceiling mounted luminaires p. 474



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted




iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted



iPro 51 mm ceiling mounted

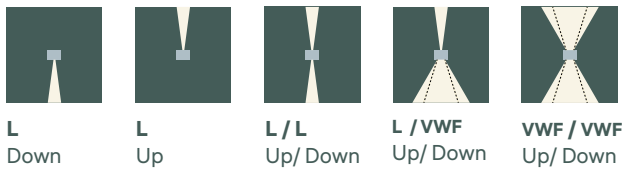

L
Down

L
Up

L / L
Up/ Down

L / VWF
Up/ Down

VWF / VWF
Up/ Down

- 3000K | 4000K
- CRI80
- IP66 | IK07
- Class II | Class III
- ON/OFF | DALI-2
- Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Finishes

-  01 White
-  04 Black
-  15 Grey
-  F5 Rust brown



Visit our website for more information



Attocube Systems AG office building - Haar, Germany — Product: Underscore InOut - Top Bend 16 mm | RGB
Ph: Roland Halbe



SIDE BEND 10 MM

2600K | 2900K | 3700K | 4600K | RGB

L from 254 mm to 7004 mm

up to 3448lm

up to 73.5lm/W

GL

CRI80



SIDE BEND 16 MM

2600K | 2900K | 3700K | 4600K | RGB | Tunable white

L from 254 mm to 7004 mm

up to 3690lm

up to 78.6lm/W

GL

CRI80



TOP BEND 16 MM

2600K | 2900K | 3800K | 4600K | RGB | Tunable white


L from 254 mm to 7004 mm

up to 5601.2lm

up to 74.1lm/W

GL

CRI80



PIXEL TOP BEND 16 MM

RGBW

L from 337 mm to 7004 mm

up to 1.281lm

up to 25.6lm/W

GL (addressable every 83.3 mm)

Other versions available

Linear systems p. 374



Underscore
InOut Side Bend
10 mm



Underscore
InOut Side Bend
16 mm



Underscore
InOut Top Bend
16 mm



Underscore
InOut Top Bend
16 mm

2600K | 2900K | 3700K | 3800K | 4600K | RGB | Tunable White | RGB-W

CRI80

IP68 | IK10

Class III

PWM 24Vdc | SPI

Power supply to be purchased separately



Finishes

01
White

ArchiExpo i-NOVO Awards 2016

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Quick DMX

Master Pro DMX

Smart Services:


Jiminy - Push Notification



Visit our website
for more information



Cultural center of La Misericordia - Palma de Mallorca, Spain — Product: Light Up Orbit - Body in stainless steel | Ø50 | Steel
Ph: José Hevia



BODY IN STAINLESS STEEL

2700K | 3000K | 4000K
 Ø28 mm | Ø50 mm | Ø80 mm
 up to 46lm
 up to 11lm/W
 L
 CRI80



BODY IN STAINLESS STEEL FLUSH

2700K | 3000K | 4000K
 Ø28 mm | Ø50 mm | Ø80 mm
 up to 46lm
 up to 11lm/W
 L
 CRI80



BODY IN STAINLESS STEEL / ALL GLASS FLUSH

2700K | 3000K | 4000K
 Ø28 mm | Ø50 mm | Ø80 mm
 up to 46lm
 up to 11lm/W
 L
 CRI80

Other versions available

Recessed in-ground luminaires p. 486 / Recessed ceiling luminaires p. 424 / Recessed wall luminaires p. 414




Light Up Orbit
 Body in stainless steel



Light Up Orbit
 Body in stainless steel flush



Light Up Orbit
 Body in stainless steel / all glass flush




Light Up Orbit
 Body in stainless steel




Light Up Orbit
 Body in stainless steel flush



Light Up Orbit
 Body in stainless steel / all glass flush



Light Up Orbit
 Body in stainless steel



Light Up Orbit
 Body in stainless steel flush



Light Up Orbit
 Body in stainless steel / all glass flush

2700K | 3000K | 4000K

CRI80

IP66, IP68, IP68 (10m) | IK07, IK09

Class III

Resistance to static load (2000kg)

Power supply to be ordered separately

Mounting accessories to be ordered separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)

Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Body finishes

12 Steel

Body finishes flush

12 Steel

14 Gold

69 Bronze

E6 Burnished chrome

Body finishes all glass flush

04 Black


12 Steel



Visit our website for more information

NEWFO INOUT

design iGuzzini



Ø76 MM

2200K | 2700K | 3000K | 3500K | 4000K


up to 850 lm

up to 90lm/W

Blade

CRI80 | CRI90

CRI80



Ø98 MM

2200K | 2700K | 3000K | 3500K | 4000K


up to 1500lm

up to 100lm/W

Blade

CRI80 | CRI90

CRI80



Ø125 MM

2200K | 2700K | 3000K | 3500K | 4000K

up to 3000lm

up to 120lm/W


Blade

CRI80 | CRI90


CRI80

Other versions available


Floodlights p. 378




Newfo InOut
Ø76 mm




Newfo InOut
Ø98 mm



Newfo InOut
Ø125 mm



Newfo InOut
Ø125 mm



Newfo InOut
Ø176 mm



Newfo InOut
Ø205 mm

Pole and wall mounted multiple floodlights p. 344



Multi Newfo
InOut on pole



Multi Newfo
InOut wall
mounted



Multi Newfo
InOut with
minimal and
connected pole

3000K | 4000K | RGBW 4000K

CRI80

IP66, IP68 (10m) | IK10

Class II

Resistance to static load (5000kg)

DALI-2 | DMX-RDM

Mounting accessories to be ordered
separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification


Finishes



Visit our website
for more information

PALCO INOUT FRAMER

design Artec Studio



Ø30 mm FRAMER

2700K | 3000K | 4000K

up to 6lm

up to 2lm/W

Framer

CRI80



Ø116 mm FRAMER

2700K | 3000K | 4000K

up to 1032lm

up to 30lm/W

Framer

CRI80



Ø153 mm FRAMER

3000K | 4000K

up to 1275lm


up to 20lm/W

Framer


CRI80

Other versions available


Floodlights p. 384




Palco InOut
Ø30 mm



Palco InOut
Ø49 mm



Palco InOut
Ø83 mm



Palco InOut
Ø119 mm



Palco InOut
Ø137 mm



Palco InOut
Ø153 mm

Pole and wall mounted multiple floodlights p. 348 / Bollards p. 440




Multi Palco
InOut on pole



Multi Palco
InOut wall
mounted



Multi Palco
InOut with
minimal and
connected pole



Palco InOut
bollard

2700K | 3000K | 4000K

CRI80

IP66, IP68 (10m) | IK10

Class II

Resistance to static load (5000kg)

DALI-2 | DMX-RDM

Mounting accessories to be ordered
separately

Intelligent Light Solutions

Smart Controls:

Quick BLE (Casambi)


Quick DALI

Master Pro Evo

Smart Services:

Jiminy - Push Notification

Finishes




Visit our website
for more information



INTELLIGENT LIGHT SOLUTIONS


SMART CONTROLS




492 | ORGANIC RESPONSE



494 | QUICK BLE




496 | MASTER PRO EVO KNX



498 | QUICK DALI




500 | MASTER PRO DMX




502 | QUICK DMX

SMART SERVICES



504 | SPACE MANAGEMENT



506 | JIMINY - PUSH NOTIFICATION

ORGANIC RESPONSE



Organic Response Technology

Wireless

IR + BLE + Wirepas protocol

Mesh Network

Plug&Play - No Commissioning

Customisable via Organic Response Express app

Cloud for Data Analytics

Energy consumption measurement

Scheduler and Human Centric Lighting

Occupancy information on maps

Multiple users with different privileges

Integrated beacon

Integration into Building Management System via API


Scalable system

Ideal for working




Visit our website
for more information

Organic Response
available from
April 2026

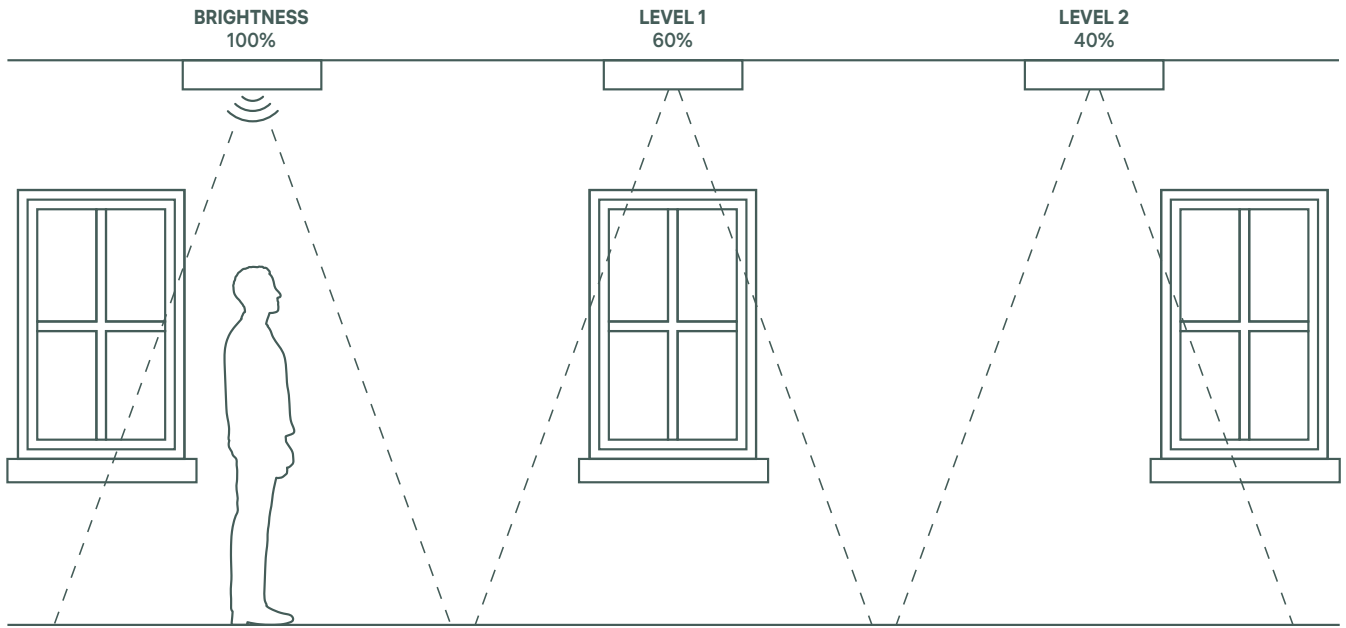


MULTISENSOR FOR MV TRACK



EXTERNAL MULTISENSOR



WIRELESS KEYPAD



APP




GATEWAY




DASHBOARD




PRODUCT WITH ORGANIC RESPONSE MULTISENSOR



SPACEPAD



LIGHT SHED 14



IN 60 EVO



LIBERA




IPLAN NEXT



OTHERS

PRODUCTS CONTROLLABLE VIA EXTERNAL INTERFACE AND BINARY INPUT



ALL IGUZZINI DALI PRODUCTS

QUICK BLE



San Rocco Complex - San Giovanni Teatino, Italy
Ph: Fabio Di Carlo

Quick BLE

Wireless

Bluetooth Casambi protocol

Mesh Network

Control via smartphone through the Casambi app

Creation of groups and scenes

Scheduler

Circadian cycles

Integration into BMS via API

FW update via OTA

Self-healing network

Future proof

Easy to retrofit

Energy saving



Ideal for Hospitality & Living and Museum applications




Visit our website
for more information

Quick BLE Casambi: box
poles available from
April 2026


MAIN FEATURES

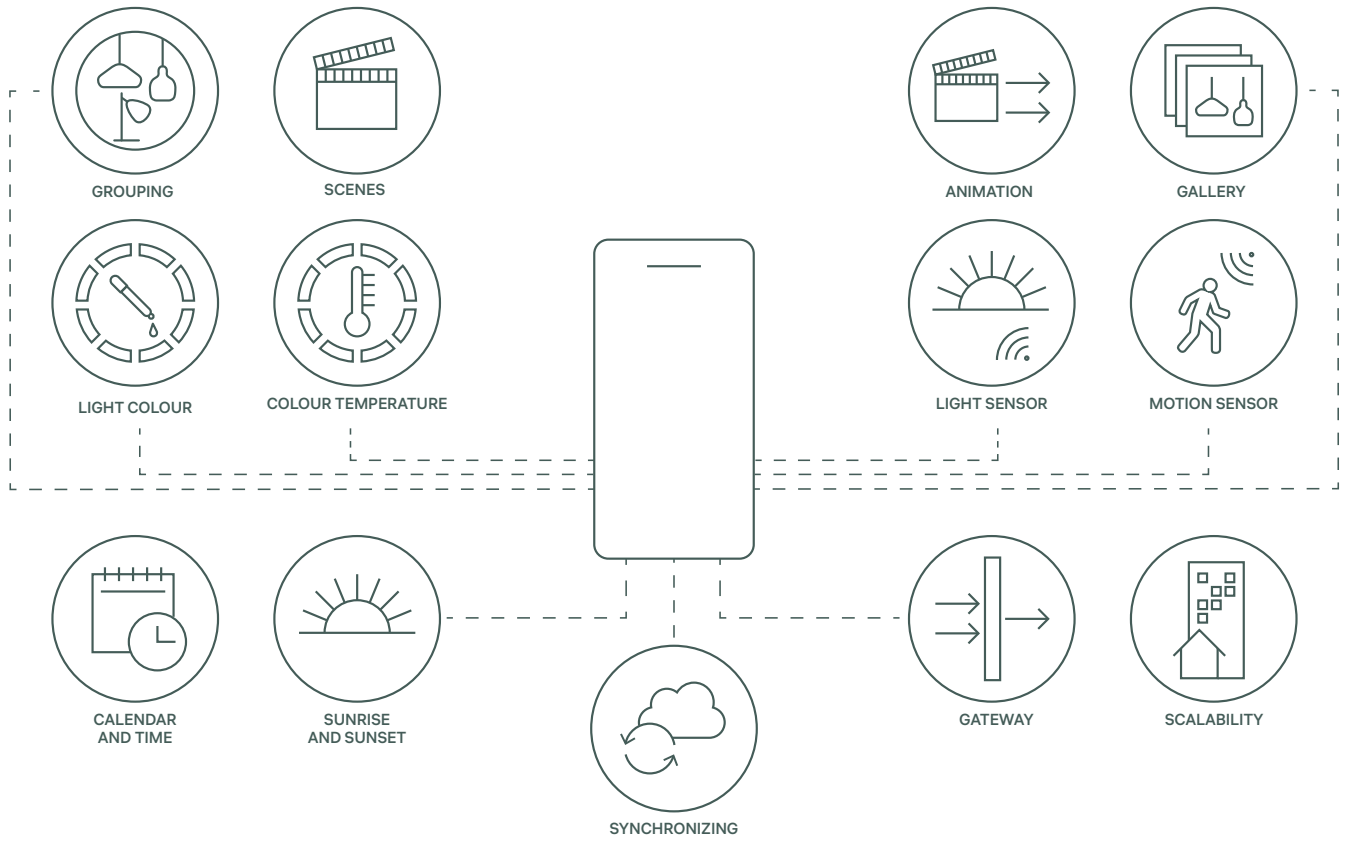

EXTERNAL INTERFACE
16/32 DALI ADDRESSES
RECESSED




EXTERNAL INTERFACE
1-4 DALI ADDRESSES /BROADCAST
RECESSED



TRACK INTERFACE
16/32 DALI ADDRESSES
MV TRACK



TRACK SENSOR
LUX E MOTION
MV TRACK



TRACK SENSOR
LUX E MOTION
LV TRACK




PULSANTIERA WIRELESS
PULSANTI PROGRAMMABILI
NO BATTERY




CASAMBI APP


CASAMBI PRODUCTS




LIGHT SHED 14




PALCO PRO




PALCO MV
PALCO LV




IN 60 EVO




SIPARIO




IPLAN NEXT




LANDER



LIBERA SYSTEM




ALLURE




LASER BLADE XS



ROBIN



LASER
LASER EVO



SPACEPAD

PRODUCTS CONTROLLABLE VIA EXTERNAL INTERFACE AND BINARY INPUT



ALL IGUZZINI DALI PRODUCTS

MASTER PRO EVO



MOL Campus - Budapest, Hungary
Ph: HGEsch Photography

Master Pro EVO

Wired

KNX/DALI Protocol

Integrable with Building Management Systems (BMS)

International standard

Interoperability


Automation and comfort

Energy efficiency


Emergency DALI monitoring



Visit our website
for more information

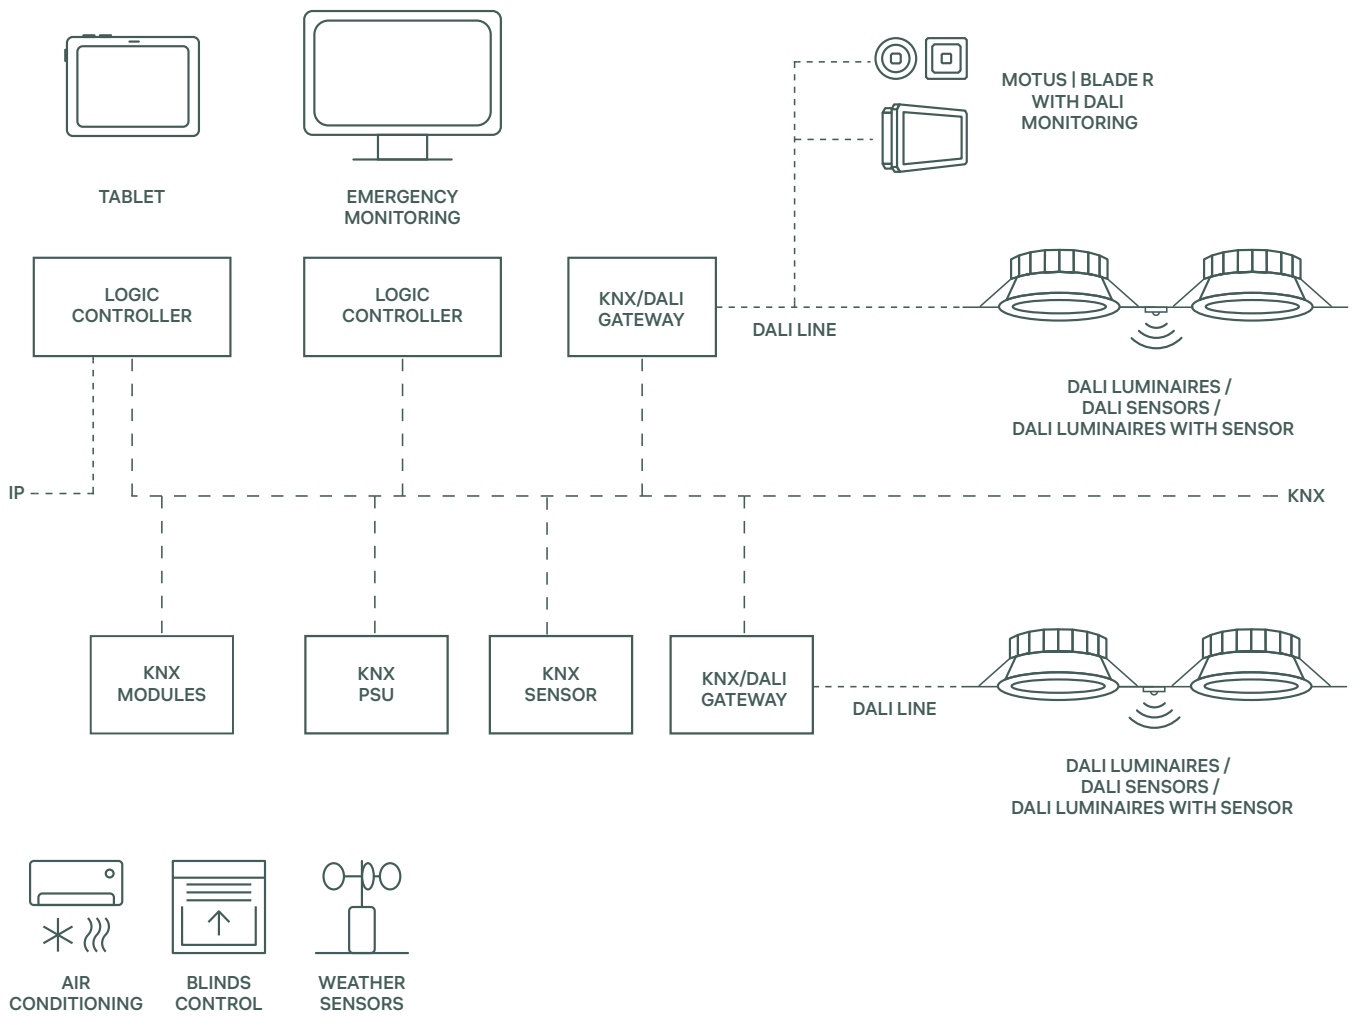

EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI

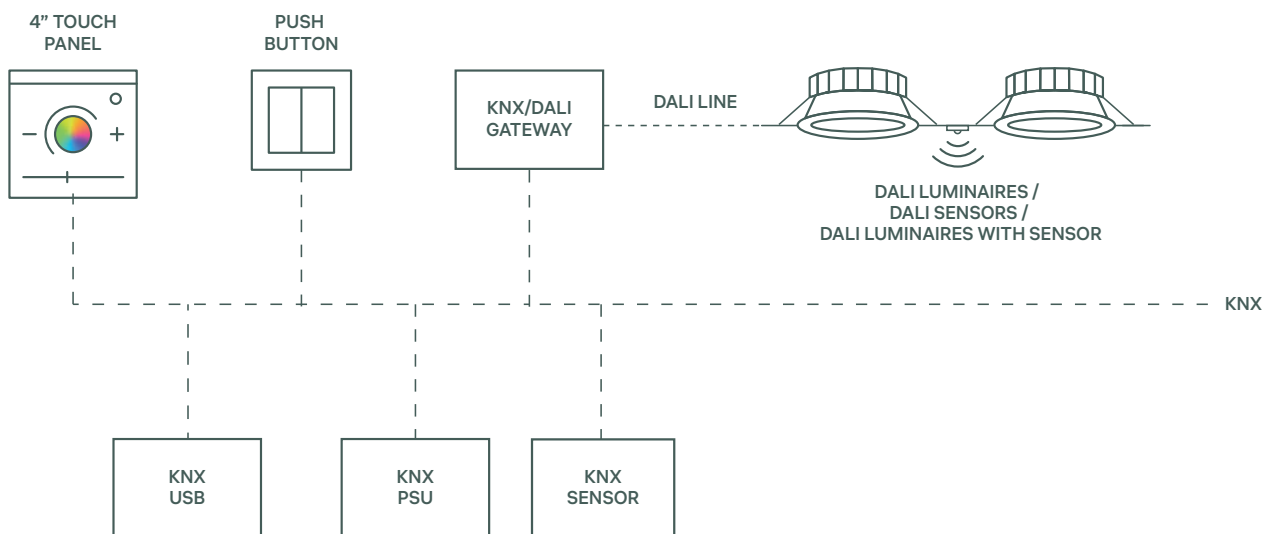


EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI



Ponte vecchio - Bassano del Grappa, Italy
Ph: Alessandra Chemollo

QUICK DALI 7"

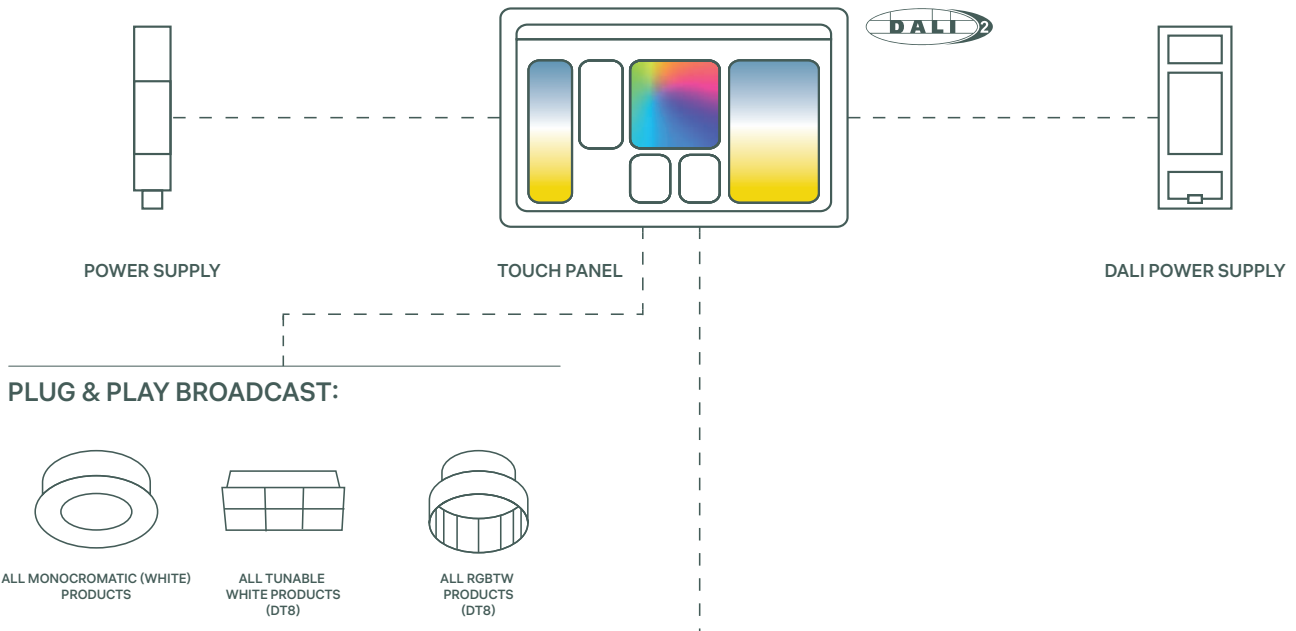

WITH PROGRAMMING:



Quick DALI

- Wired
- DALI Protocol
- Maximum 64 DALI addresses
- Plug & Play (Broadcast)
- Programmable
- Calendar
- Sequences
- Circadian cycle
- 7" and 4" Touch Panel
- Ideal for small offices, small retail spaces, meeting rooms.



Visit our website
for more information

MASTER PRO DMX



One Avenue Excellence Center - Shenzhen, China
Ph: Guozeng Jiang, Rivers Photography

Master Pro DMX

Wired

DMX-RDM, DALI, SPI, Art-Net Protocol

Programmable

Remote management, control, and scheduling options

Scenes and sequences

Touch panel and buttons for local control


Expert configuration for systems up to 3072 total addresses/channels

Designer configuration for systems with an unlimited number of channels/addresses

Ideal for outdoor architectural lighting, including dynamic effects



Visit our website
for more information

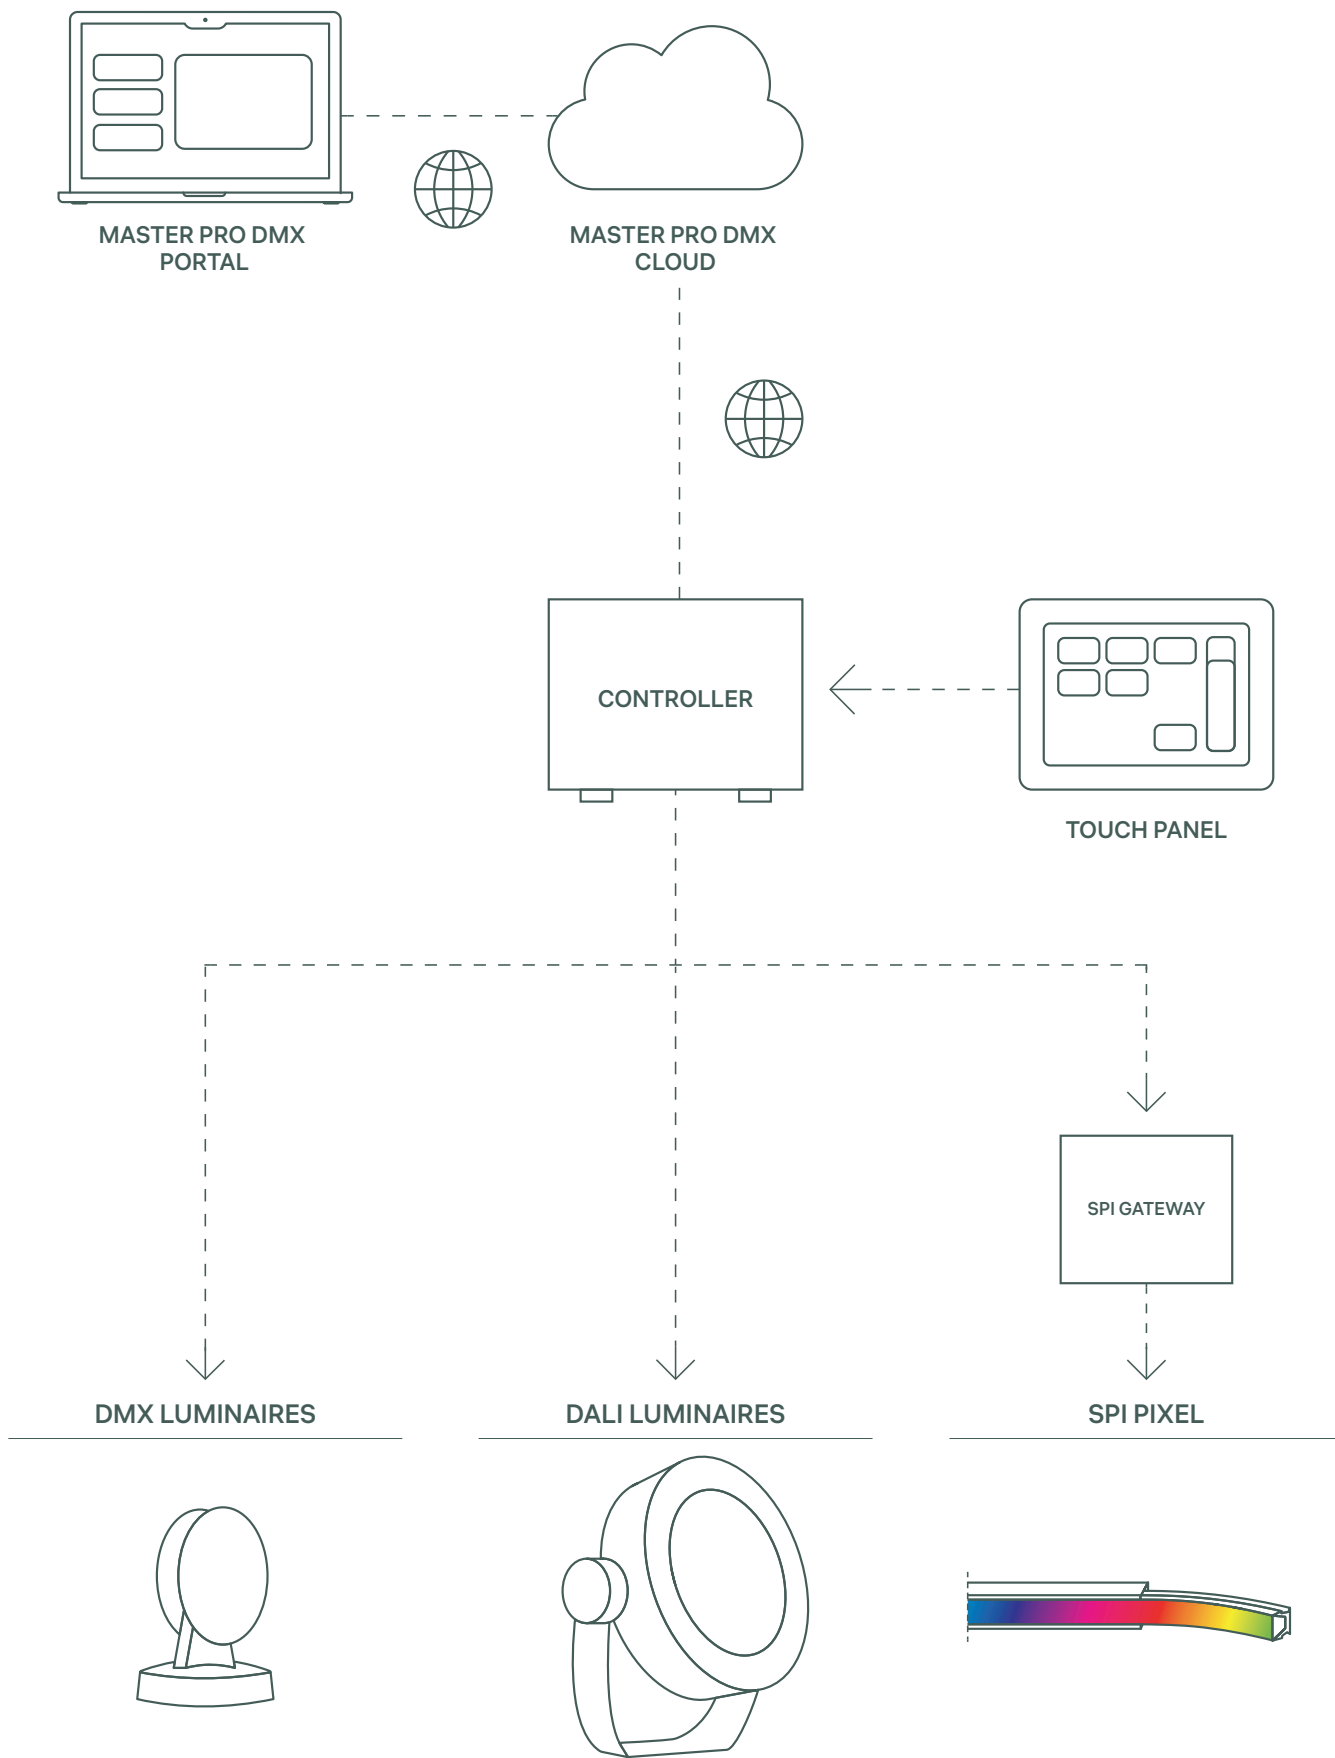


EXAMPLE: FOR THE CORRECT CONFIGURATION, PLEASE CONTACT IGUZZINI

QUICK DMX



Chaumont Viaduct - France
Ph: Richard Pelletier - Mairie de Chaumont

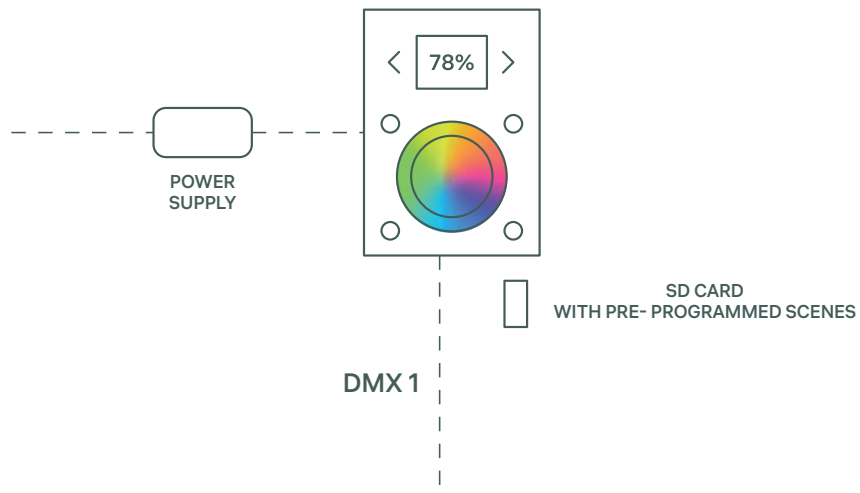

PLUG AND PLAY




TRICK RGB,
TRICK EM




LINEALUCE 47,
RGBW | RGB | TW



LINEALUCE 27,
RGBW | RGB




MAXIWOODY
RGB




IPRO
RGBW | RGB | TW



AGORÀ
RGBW | TW



PLATEA RGBW | TW



LEDSTRIP RGB
(WITH 9639)




UNDERScore RGB
(WITH 9639)




LIGHT UP EARTH
RGBW

WITH PROGRAMMING



ALL DMX PRODUCTS



ALL TW 2 CH
(WITH 9639)

Quick DMX

Wired

DMX protocol

Glass panel with touch controls and integrated display

Plug & Play with preset scenes and sequences on SD card

Programmable with free software

Maximum 512 channels + 512 channels

Power supply included

Ideal for architectural lighting, even with dynamic effects




Visit our website
for more information

SPACE MANAGEMENT



Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy
Ph: Studio Buschi

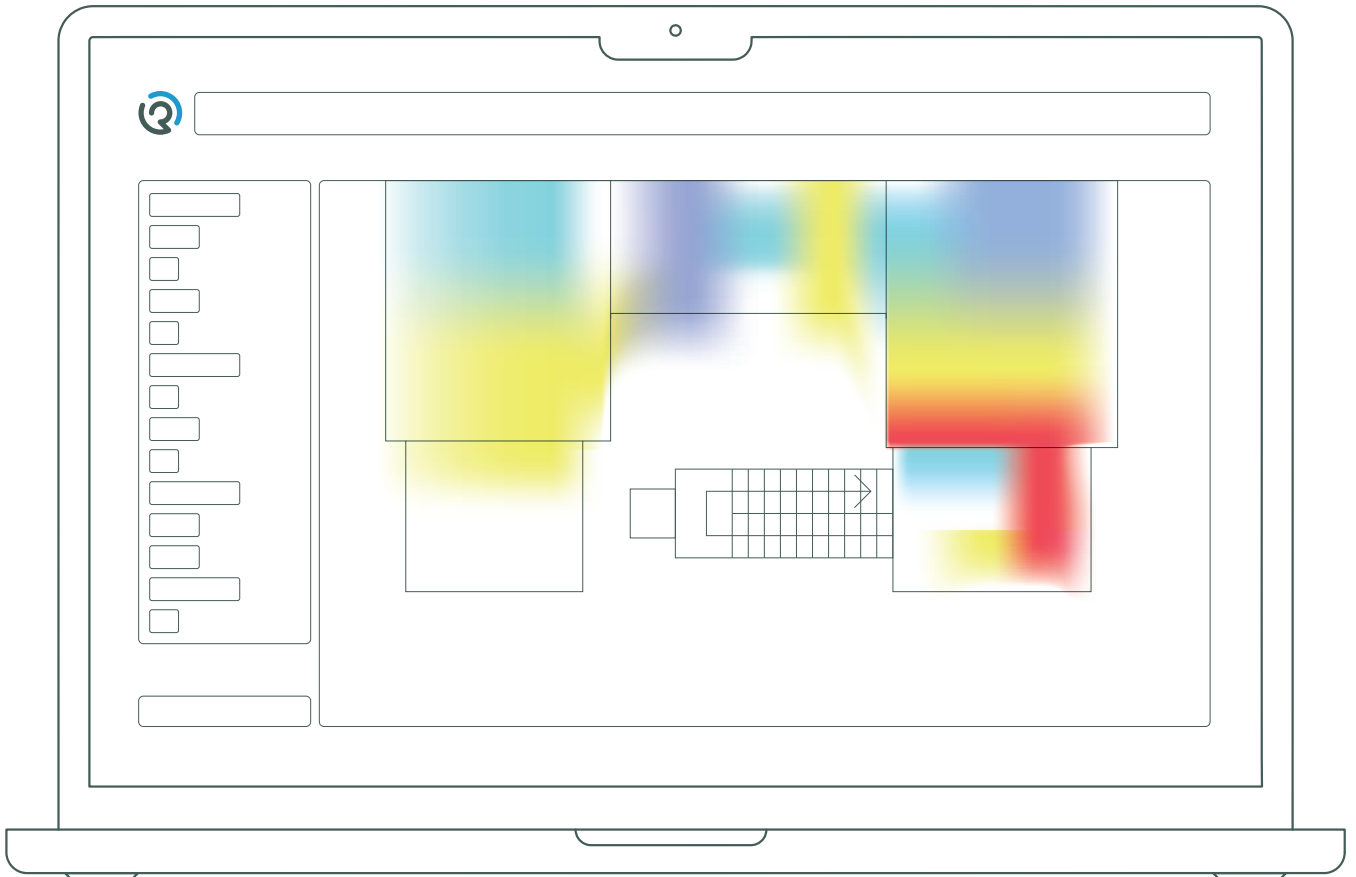

ORGANIC RESPONSE PORTAL

Space Management

Space Management

Service available through Organic Response luminaires, sensors, and gateways

Graphical representation of space usage on the web portal

Data Analytics

Ideal for offices and multifunctional environments



Visit our website
for more information



Fondazione Cini "Nozze di Cana" - Venice, Italy
Ph: Stefano Anzini

Jiminy - Push Notification

Wireless

Bluetooth protocol

Integrated beacon in iGuzzini products

Cloud-based service

Remote content updating

App customization


Wide range of content types supported for notifications

Usable both indoors and outdoors

Ideal for museum and retail sectors



Visit our website
for more information

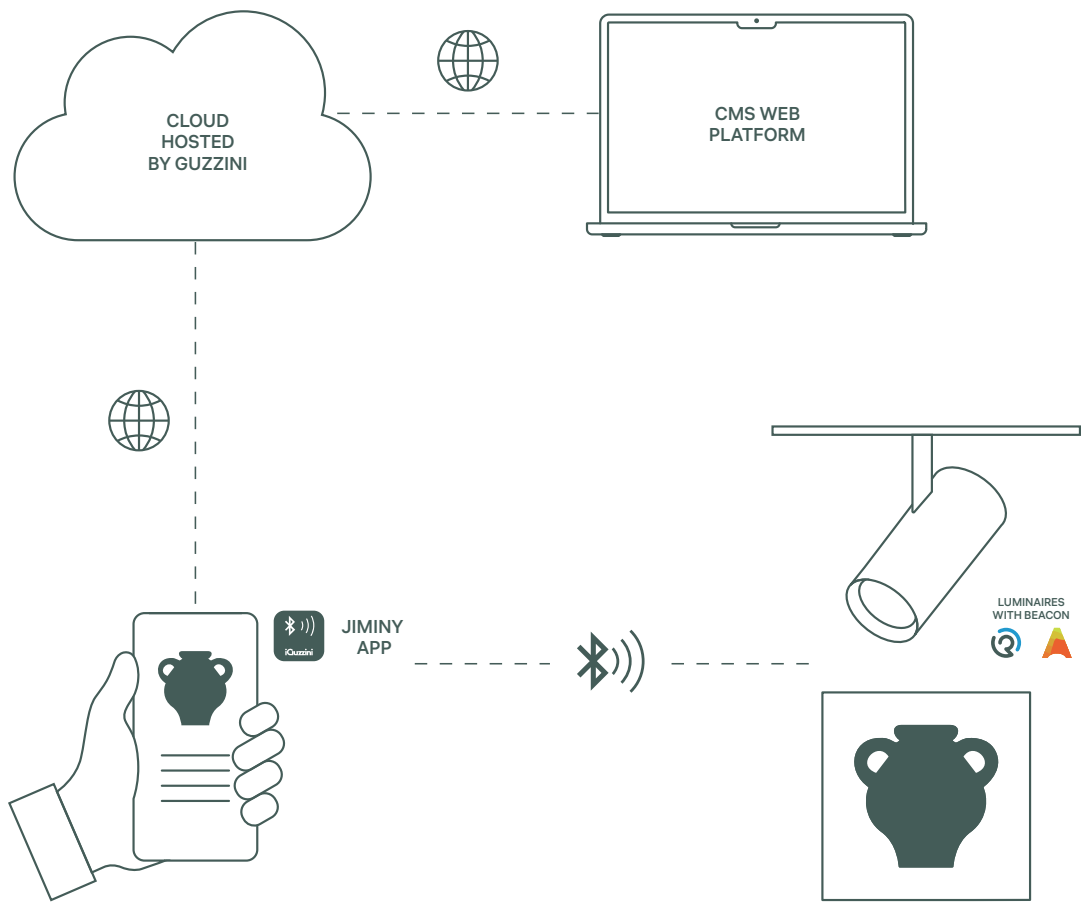


FOR THE VISITOR




JIMINY APP

FOR THE OWNER




JIMINY ADMIN APP FOR COMMISSIONING

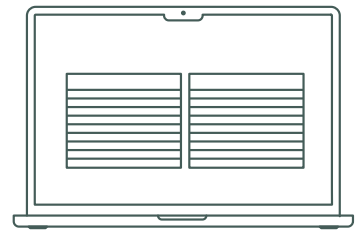

DASHBOARD
CONTENT ASSOCIATION TO BEACON
JIMINY APP CUSTOMIZATION
SIMPLIFIED CONTENT CREATION

PRODUCTS WITH INTEGRATED BEACON

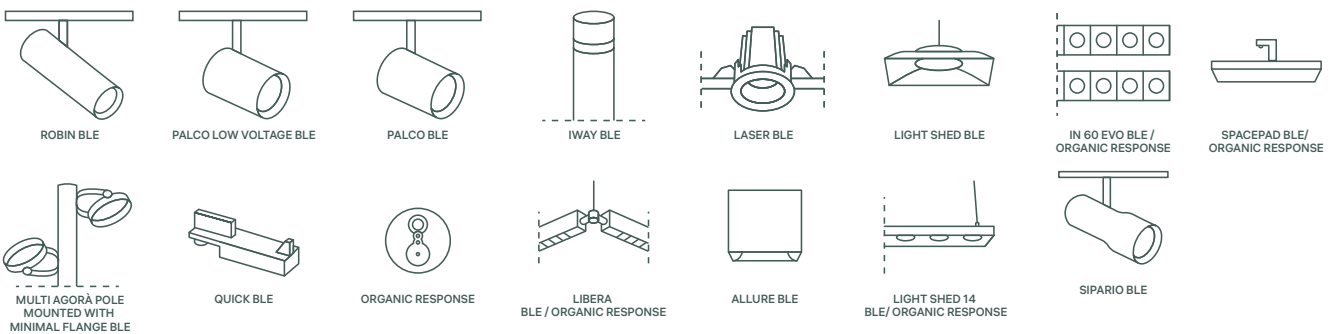

INDOOR PRODUCTS

- Pag. 4 | Under restaurant - Lindesnes, Norway | Ph: Tomasz Majewski
Pag. 46 | MOL Campus – Budapest, Hungary | Ph: HGEsch Photography
Pag. 80 | University Of Texas Dallas - Arts and Performance Center (UTD APC) - Dallas, Texas, USA | Ph: Mauricio Rojas
Pag. 126 | Cultural Centre of the Stavros Niarchos Foundation Athens, Greece | Ph: Michel Denancé
Pag. 172 | Oman Museum Across Ages - Nizwa, Oman | Ph: Phillip Handforth
Pag. 196 | Politecnico di Milano's Architecture Campus - Milan, Italy | Ph: Michele Nastasi
Pag. 224 | Sacred Heart Sanctuary - Ca' Staccolo, Urbino, Italy | Ph: Michele Nastasi
Pag. 264 | Kincho restaurant - Sheraton Hotel Como, Italy | Ph: Luca Rotondo
Pag. 280 | Lighthinking Space HQ iGuzzini illuminazione - Recanati, Italy | Ph: Studio Buschi
Pag. 290 | WineBANK Köln - Colonia, Germany | Ph: Jens Kirchner

OUTDOOR PRODUCTS

- Pag. 306 | Parco del Mare – Rimini, Italy | Ph: Fabio Di Carlo
Pag. 342 | HimmerLand Resort - Farsø, Denmark | Ph: Tomasz Majewski
Pag. 358 | HimmerLand Resort - Farsø, Denmark | Ph: Tomasz Majewski
Pag. 368 | Technical institute - Tampere, Finland | Ph: iGuzzini Archive
Pag. 376 | Gare de Mons – Belgium | Ph: Didier Boy de la Tour
Pag. 398 | Oman Museum Across Ages - Nizwa, Oman | Ph: Phillip Handforth
Pag. 410 | Jiu Ke Shu Future Arts Center - Shanghai, China | Ph: Seth Powers Photography
Pag. 418 | Modern Museum - Istanbul, Turkey | Ph: Cemal Emden
Pag. 428 | Church of Hvinningdal - Silkeborg, Denmark | Ph: Tomasz Majewski
Pag. 444 | D3 Creek Park - Dubai, UAE | Ph: Oliver Jackson
Pag. 462 | Winged Victory - Brescia, Italy | Ph: Alessandra Chemollo
Pag. 476 | Tunnel Rue Delandine - Lion, France | Ph: Michel Djaoui

INTELLIGENT LIGHT SOLUTIONS

- Pag. 490 | University of Macerata. Loggia del Grano - Macerata, Italy | Ph: Studio Buschi

Editorial Coordination
iGuzzini illuminazione

Layout
XyComm

Render
iGuzzini, Salaposa, Gelfo Design

Print
Nava Press Milano
03/2026

